



User Manual

5G NR AX3000 Wi-Fi 6 Mobile Hotspot

Preface

D-Link reserves the right to revise this publication and to make changes in the content hereof without obligation to notify any person or organization of such revisions or changes.

Manual Revisions

Revision	Date	Description
1.00	01/20/2026	Initial Version
1.01	03/09/2026	Modify battery info & EIRP

Trademarks

D-Link and the D-Link logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States or other countries. All other company or product names mentioned herein are trademarks or registered trademarks of their respective companies.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Apple®, Apple logo®, Safari®, iPhone®, and Macintosh® are trademarks of Apple Inc., registered in the U.S. and other countries. App StoreSM is a service mark of Apple Inc.

Chrome™ browser, Google Play™ and Android™ are trademarks of Google Inc.

Google, Nest Hub, and Google Home are trademarks of Google LLC.

Internet Explorer®, Windows® and the Windows logo are trademarks of the Microsoft group of companies.


Copyright © 2026 by D-Link Corporation, Inc.

All rights reserved. This publication may not be reproduced, in whole or in part, without prior expressed written permission from D-Link Corporation, Inc.

Table of Contents

Package Contents.....	1	D-Link Cloud.....	51
System Requirements.....	2	Features.....	52
Introduction	4	Data Cap.....	52
Wireless Installation Considerations.....	7	SMS	53
Setup.....	8	PIN.....	55
Hardware Setup	9	Dynamic DNS	56
Initial Connection to the F530	10	Management.....	58
Connect via USB.....	10	Time	58
D-Link FALCON Setup	12	System Admin.....	59
Setup Wizard	13	Admin.....	59
Configuration.....	19	System	60
Accessing the Web User Interface	19	Upgrade	61
Home	20	Join N' Share App Setup	62
Internet.....	21	LCD Touch Panel.....	65
F530	24	D-Link FALCON	69
Connected Clients	25	Battery Removal	75
Storage Device.....	26	Troubleshooting	76
Settings	27	Wireless Basics	78
Wizard	27	What is Wireless?.....	79
Cellular.....	28	Tips.....	81
Internet.....	30	Wireless Security	82
Wireless	33	Technical Specifications	83
Wireless.....	34	Regulatory Information	84
Guest Zone	38		
Network.....	40		
Join N' Share	42		
Web Access.....	43		

Package Contents



5G NR AX3000 Wi-Fi 6 Mobile Hotspot



Quick Installation Guide



USB Cable

If any of the above items are missing or damaged, please contact your local reseller.

Note: Using a power supply with a different voltage rating from the one included with the device may cause damage and void the warranty for this product.

System Requirements

Network Requirements	A compatible Nano SIM/UICC card with mobile data service ¹
Web-based Configuration Utility Requirements	Computer with the following: <ul style="list-style-type: none">• Windows®, Macintosh, or Linux-based operating system• A Wi-Fi interface Browser requirements: <ul style="list-style-type: none">• Microsoft Edge• Mozilla Firefox 28 or higher• Apple Safari 6 or higher• Google Chrome 28 or higher
D-Link FALCON App Requirements	<ul style="list-style-type: none">• iOS® or Android™ device (Please refer to the description of the app's page to check whether your device is compatible.)

¹ Subject to services and service terms available from your carrier.

Safety Warnings

- Do not disassemble the product, strike it, crush it, or expose it to fire, water, or ice.
- Do not use or store the product outside the specified safe operating or storage temperature range.
- Do not use the product if the battery swells or becomes deformed.
- Do not puncture, crush, short-circuit, or heat lithium batteries. It may cause fire or explosion.
- Only trained personnel with ESD protection and fire safety equipment may perform repairs.
- Damaged batteries must not be reused or resoldered.
- Do not replace the battery with an incorrect type, as this may compromise safety protections and cause explosion; use only the battery that comes with the product package.
- Do not store the battery in environments subject to extremely high temperatures or low air pressure, which may result in explosion or leakage of flammable liquid or gas.

Introduction

Wherever you are, the D-Link F530 utilizes ultra-fast 5G and Wi-Fi 6 technology to enable high-speed mobile Internet sharing. Additionally, the power-saving mode balances performance and battery life, allowing energy consumption to be optimized according to your needs.

High-Speed Mobile Internet with 5G and LTE Connectivity

The F530 uses a cellular Internet connection to give you a simple and fast Wi-Fi network on the move. Utilizing 5G technology, you can achieve download speeds up to 7.01 Gbps and upload speeds up to 2.5 Gbps. The built-in internal antennas ensure a reliable connection to your mobile services, while separate internal Wi-Fi antennas provide extended coverage for computers and mobile devices with dual-band connectivity.

Instant Internet Sharing

The F530 is a mobile hotspot that allows you to connect notebooks, smartphones, tablets, and other wireless devices to the Internet with ease. During a business trip or family vacation, just share the Wi-Fi QR code right from the device's touch panel to connect to the Wi-Fi network for everyone to access a high-speed Wireless AX (Wi-Fi 6) network. Whether you're on a business trip or a family vacation, simply share the Wi-Fi QR code displayed on the device's touch panel and let everyone enjoy fast connectivity in seconds.

Easy Setup and Seamless Network Access


Getting online with the F530 is quick and hassle-free. Simply insert a 5G or 4G Nano SIM card to connect to your mobile network, then scan the Wi-Fi QR code displayed on the touch panel to instantly access the Wi-Fi network and begin device setup.

Designed for True Portability

The F530 gives you convenient connectivity in a powerful yet portable device that fits easily into your bag or pocket. Powered by a built-in 5260 mAh rechargeable battery, it provides up to 7 hours of operation, keeping you connected even when power is not readily available. Ideal for business trips, family vacations, or solo travel, the F530 keeps you online anytime, anywhere.

Hardware Overview

Side View

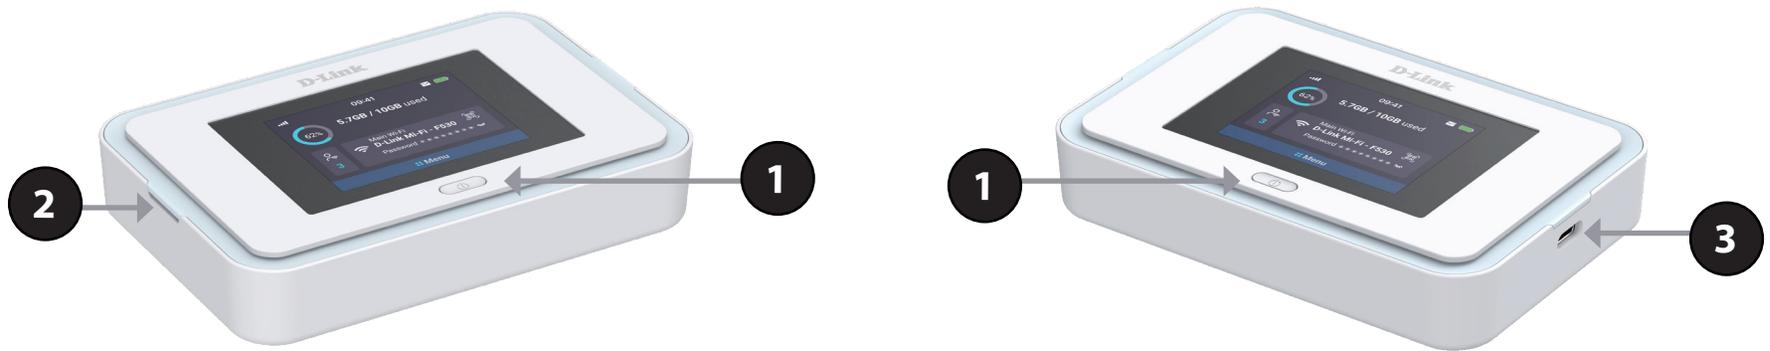

1	Power Button	Press and hold this button for 5 seconds to turn on/off the device. The screen should display D-Link when it is turned on.
2	Cover Notch	This notch is on the side of the device for opening the device cover. The SIM card, microSD card, and reset button can be accessed after the cover is removed. Refer to Hardware Setup on page 9 .
3	USB 3.0 Type-C	Use the included cable to connect to a powered USB port to charge the device, or connect to a computer to access the configuration utility.

Hardware Overview

Touch Panel Menu



Number	Name	Description	
1	Battery Level	Green Bars	The battery level is shown by the number of green bars. If the device is powered by USB without a battery inserted, the indicator will always show full capacity.
2	Menu	Power Mode	Display the power mode options.
		Wi-Fi	Display the current Wi-Fi networks. Swipe down to access the WPS function.
		Mobile Settings	Display the following information/configuration options of the mobile connection: cellular technology, roaming status, and SIM lock status.
		Firmware Upgrade	Display the firmware upgrade method and the current firmware version.
		System	Access to the reboot and reset function as well as the language setting.
		Information	Display the general system information: WAN status, IP and MAC address, phone IMEI number, and software version.
3	Cellular Signal Strength	White Bars	The white bars represent cellular signal strength; a higher number of bars indicates a stronger connection.

Wireless Installation Considerations

The device can be accessed using a wireless connection from anywhere within the operating range of its wireless network. Keep in mind that the quantity, thickness, and location of walls, ceilings, or other objects that the wireless signals must pass through may adversely affect wireless signals. Ranges vary depending on the types of materials and background RF (Radio Frequency) noise in your home or office. The key to maximizing the wireless range is to follow these basic guidelines:

1. Minimize the number of walls and ceilings between the device and other network devices. Each wall or ceiling can reduce your adapter's range from 1 to 30 meters (3 to 90 feet).
2. Be aware of the direct line between network devices. A wall that is 1.5 feet thick (0.5 meters) appears to be almost 3 feet (1 meter) thick at a 45-degree angle. At a 2-degree angle, the wall appears to be over 42 feet (14 meters) thick. Position devices for their signals to travel straight through a wall or ceiling (instead of from a certain angle) for better signal reception.
3. Building materials make a difference. A solid metal door or aluminum studs may have a negative effect on range. Try to position extenders, access points, wireless routers, and computers for their signal to directly pass through drywall or open doorways. Materials and objects such as glass, steel, metal, walls with insulation, water (fish tanks), mirrors, file cabinets, brick, and concrete will degrade your wireless signal.
4. Keep your product away (at least 3-6 feet or 1-2 meters) from electrical devices or appliances that generate RF noise.
5. If you are using 2.4 GHz cordless phones or X-10 (wireless products such as ceiling fans, lights, and home security systems), your wireless connection may degrade dramatically or drop completely. Make sure your 2.4 GHz phone base is as far away from your wireless devices as possible. The base transmits a signal even if the phone is not in use.

Setup

There are several different ways you can use to configure your F530 to connect to the Internet.



- **Hardware Setup** - This section explains how to set up your F530. Refer to **page 9**.
- **D-Link FALCON** - Use your compatible iOS or Android device to install and configure your F530. Refer to **page 12**.
- **D-Link Setup Wizard** - The wizard will launch when you log in to the F530 by using your PC for the first time. Refer to **page 13**.
- **Manual Setup** - Log in to the F530 for manual configuration of your device. Refer to **Configuration** on **page 19**.

Hardware Setup

1. Remove the device cover by gently prying it up from the case using the side notch.
2. Push the SIM tray to open it. Then place the SIM card on one side of the tray and the microSD card on the other side of the tray, making sure it is oriented correctly by aligning it with the notch in one corner.
3. Press and hold the power button for 5 seconds to turn on the device. Once the LCD touch panel displays D-Link, you may proceed with configuration.

Notes:

1. *Always unplug and turn off the device before installing or removing the SIM card. Never insert or remove the SIM card while the device is in use.*
2. *The device can be powered via the battery or the USB Type-C port.*
3. *The Reset button restores the device to its factory default settings. It is useful if you forget the admin password. Note that all current configurations will be lost when you reset the device.*

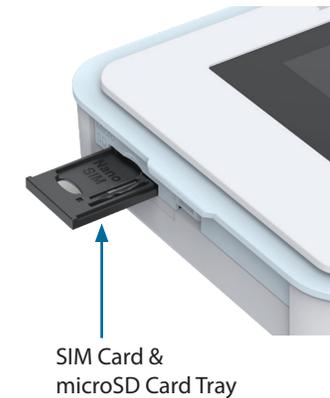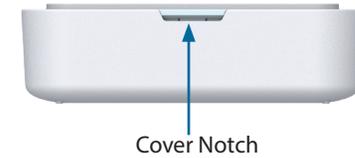


Initial Connection to the F530

By default, the F530 comes configured to work with most 5G/4G SIM cards. Simply connect wirelessly via the Wi-Fi sharing function directly from the LCD screen, or use the included USB cable to access the Internet through your mobile data plan. If you wish to configure the hotspot, you will need to establish a direct connection with the F530 in order to access the web-based configuration utility. For more information, please refer to the below sections. Please make sure that the F530 is powered on and has sufficient battery power before commencing the setup process.

Connect via USB

To connect to the F530 via USB, plug the provided USB Type-C cable into the USB port on the side of the device, and plug the other end into an available USB port on your computer.

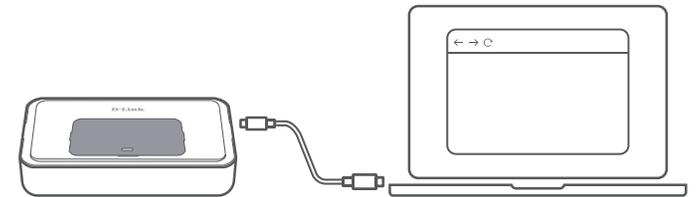

Connect via Wi-Fi




Notes:

1. Please refer to the documentation that came with your operating system or wireless client for further information on how to connect to a wireless network.
2. The SSID (Wi-Fi name) and password are printed on the label attached to the bottom of the device. If you want to connect to the F530 wirelessly, you will need to enter this SSID and password.

To connect to F530 using Wi-Fi, open your operating system's wireless networking utility and scan for available networks to connect to. By default, the network name (SSID) of the F530 will be in the format **F530-xxxx**, where "**xxxx**" represents the last four characters of the F530's MAC address. The default SSID and password can also be found on the product label on the bottom cover.

Once you have located your F530's wireless network, select it and click **Connect**.

You will then be prompted to enter the network security key for your device. Enter the security key in the box provided and click **OK**. Your wireless connection utility will confirm that the connection is successful, and you can move to the next step to continue to the configuration process.

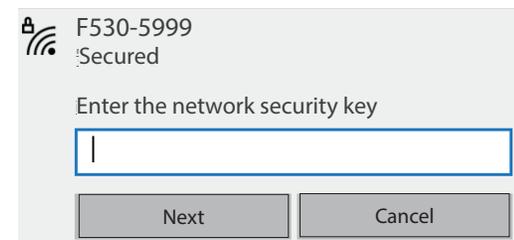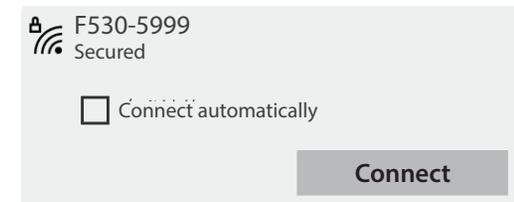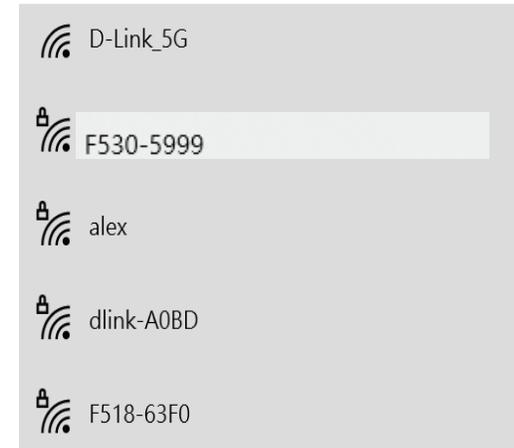

D-Link FALCON Setup

The FALCON App allows you to install and configure your device from your compatible Android or iOS devices.

Note: The screenshots may be different depending on your mobile device's OS version. The following steps show the iOS interface of the FALCON App. If you are using an Android device, your screen images may appear different but the process is the same.

Step 1

Search and install the free **FALCON App** available on the App Store or on Google Play.

NOTE: Please activate your newly registered account within 7 days, and if the verification email landed in your Spam folder, first move the email to your Inbox folder so that you can click on the activation button for account activation.



Step 2


Launch the D-Link FALCON App from the Home screen of your device.

Step 3

Sign in on the app using an email account. If you already have a D-Link account, you can tap **Sign In** at the bottom of the screen to be redirected to the login page. It allows you to use cloud services to control and manage your device.

Step 4

Tap **Install New Device** or + icon in the middle. Scan the Setup code on the device label located on the bottom of the device. Follow the on-screen instructions to complete the setup.

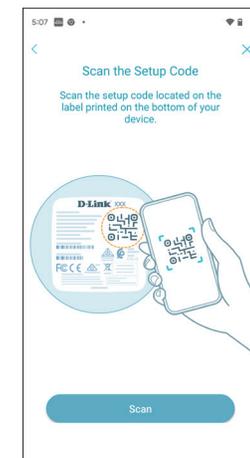


Setup Wizard

The setup wizard is designed to guide you through a step-by-step process to configure your new F530 for Internet connection.


If this is your first time configuring the device, open your web browser and enter **http://xxxx.devicesetup.net/** into the browser (xxxx represents the last 4 characters of the MAC address). Enter the **Admin Password** and click **Log In** to start the configuration process. The web address and default admin password are printed on the device label on the bottom of the device.

The default HTTPS version of the Web management page may display a security warning message alerting you of possible data breach. Refer to the below steps for additional instructions when you see such warning.

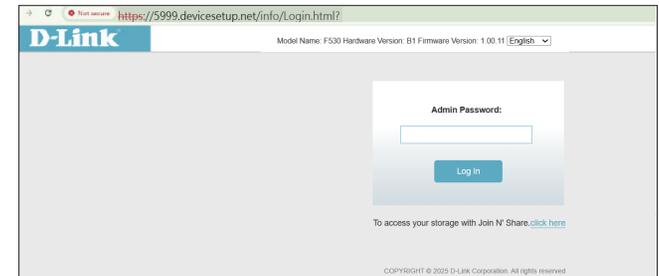

When your browser displays a security warning stating, "Your connection isn't private." You will also see Not Secure in the address bar, along with HTTPS crossed out with red lines. This is because the device's default management URL is not an actual Internet website with valid certificates. You can proceed with the setup by following these steps:

1. Click the "Advanced" button.

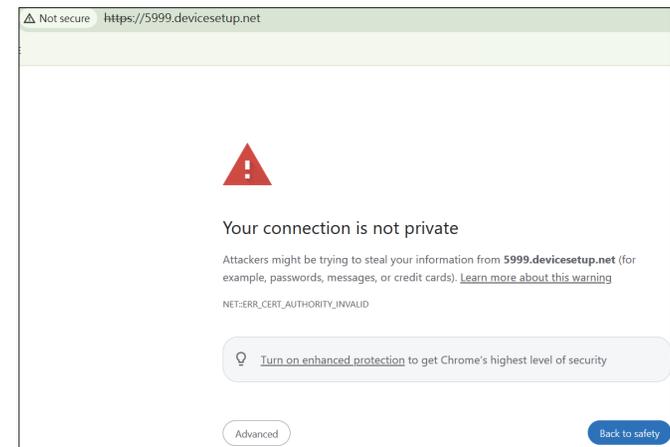

2. Click "Proceed to the default *management URL*".

Now you will be able to log in to your device.

Warning: Your connection is not private

Attackers might be trying to steal your information from **5999.devicesetup.net** (for example, passwords, messages, or credit cards). [Learn more about this warning](#)

NET::ERR_CERT_AUTHORITY_INVALID

[Turn on enhanced protection](#) to get Chrome's highest level of security

[Hide advanced](#) [Back to safety](#)

This server could not prove that it is **5999.devicesetup.net**; its security certificate is not trusted by your computer's operating system. This may be caused by a misconfiguration or an attacker intercepting your connection.

[Proceed to 5999.devicesetup.net \(unsafe\)](#)

Agree to the **Terms of Use and Privacy Policy** before proceeding.

Terms Of Use And Privacy Policy

D-Link Corporation and its family of companies (alternatively referred to herein as "D-Link", "we" or "us") intend to provide access to certain site, app and related services (collectively "Services") to a user (alternatively referred to as "you", "user" or "customer") subject to the terms and conditions set forth below, including all documents, policies, and guidelines incorporated herein by reference. Please read this agreement carefully and refer to these terms and conditions ("Terms of Use") as necessary as you explore and make use of the Services. The Terms of Use provide the conditions upon which D-Link agrees to provide you access to the Services. If you disagree with any provision contained herein, or do not wish to accept these conditions, please do not use or intend to use the Services. By using the Services, you are agreeing to the Terms of Use.


1. Registration Obligations.

You may be assigned a D-Link account when you are registering to use the Services. You shall promptly activate your D-Link account from the date it is assigned or created, or D-Link may remove or disallow the account. Your D-Link account may be associated in the system with multiple D-Link devices.

Language: **English** [^](#) [Agree](#)

The wizard is displayed to help you set up your device step by step.

Click **Next** to continue.

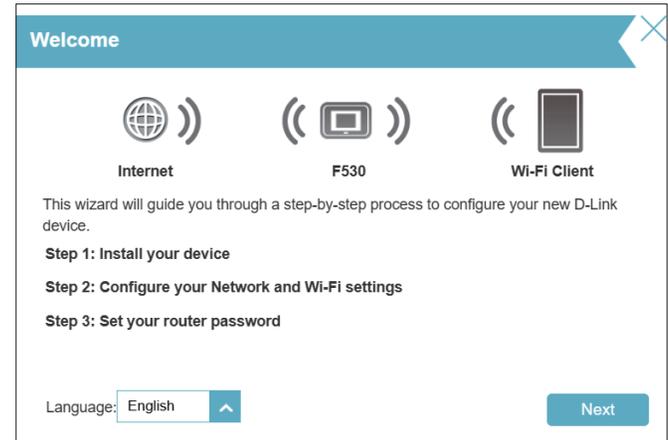

Enter a **Wi-Fi Network Name** and **Wi-Fi Password** to set up your Wi-Fi network. Your wireless clients will need to have this passphrase to be able to connect to your wireless network. The password must be 10-20 characters in length, contain both letters and numbers, and must not have identical characters consecutively.


Click **Next** to continue.



To better protect the F530's configuration access, please enter a password. You will be prompted for this password every time you want to use the device's web configuration utility.


Note: It is strongly recommended that you change the default device password. The password must be 10–15 characters in length, contain both letters and numbers, and must not have identical characters consecutively.

Click **Next** to continue.

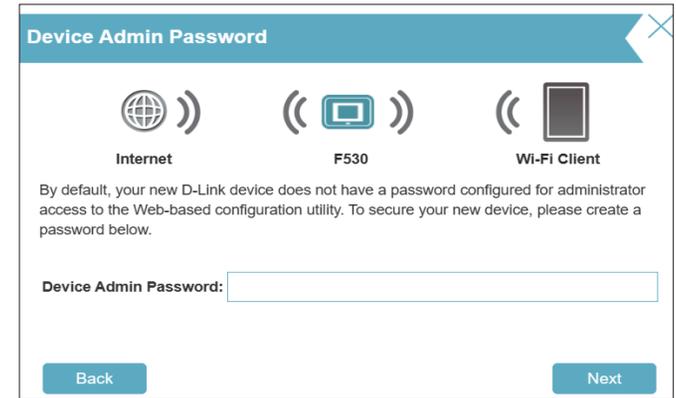


Select your time zone from the drop-down menu.

Click **Next** to continue.

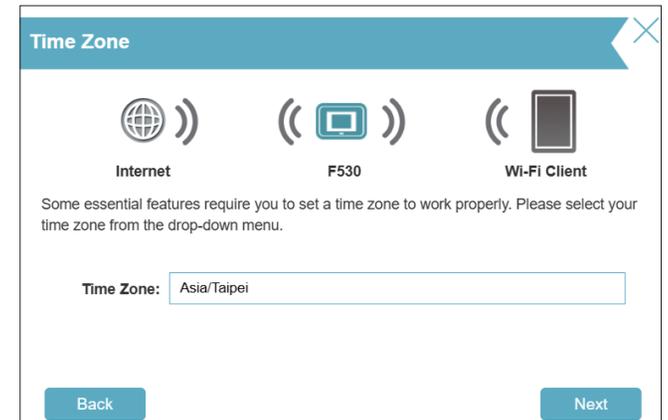

Keeping your router's firmware updated ensures that you always receive the latest security updates and new features. You can choose to update your device automatically or manage the updates yourself.

Click **Next** to continue.

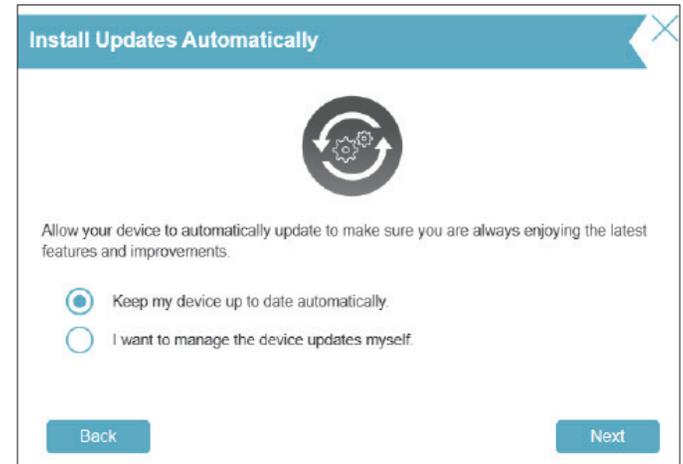

You will be presented with a summary of your settings.

Click **Next** to finalize the settings or **Back** to make changes.




Please wait while the device settings are being saved.
Do not turn off or unplug your device during this time.



Your new settings have been saved and your device is now configured.

Click **OK** to close the Setup Wizard.


You should log in to the configuration utility by entering your configured Admin Password.

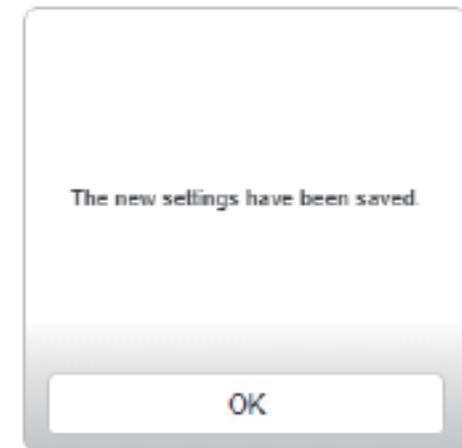

Configuration

Accessing the Web User Interface


1. Type **https://xxxx.devicesetup.net/** in the address bar. (xxxx represents the last 4 characters of the MAC address)
2. Enter the admin password.
 - If this is your first time logging in, please enter the password printed on the device label located on the bottom of the device.
 - If you have previously completed the Setup Wizard, enter the password you created during initial setup.
 - If you can't remember your password for login, press the Reset button to restore the device to its default settings.

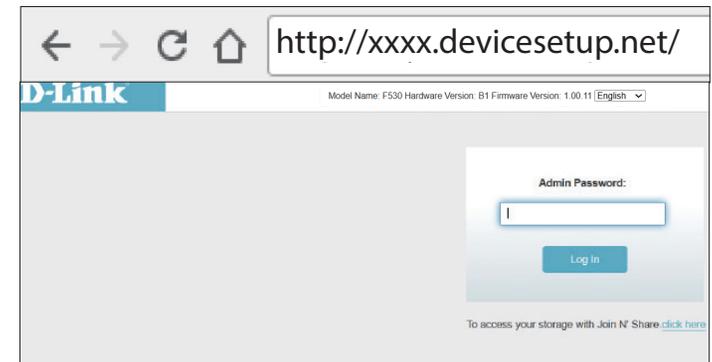

The F530's Home page will display its current connection status.

The left panel has quick access to **Settings, Features, and Management.**

Note: The system will automatically log out after a period (180 seconds) of inactivity.

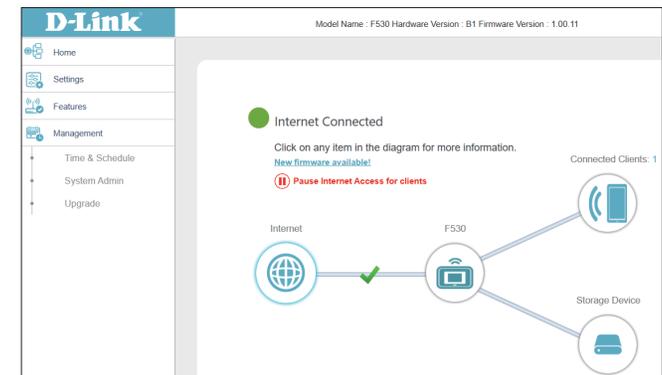

Home

The **Home** page displays the current status of your network in the form of an interactive diagram. You can click on each icon to display information about each node of the network in the middle of the screen. The menu bar in the top-left corner of the page allows you to quickly navigate to other pages. Refer to the following pages for a description of each section.

● **Internet Connected**

Click on any item in the diagram for more information.
[New firmware available!](#)
ⓘ **Pause Internet Access for clients**

Connected Clients: 1

```

graph LR
    Internet((Internet)) --- F530((F530))
    F530 --- Clients((Connected Clients: 1))
    F530 --- Storage((Storage Device))
  
```

Internet

ⓘ **Primary Internet**

SIM Card Status: Detected	IPv4 / IPv6
Connection Type: Cellular	MAC Address: 0E:92:7B:5F:D4:69
Network Status: Connected	IP Address: 10.34.163.35
Connection Uptime: 0 Day 4 Hour 23 Min 15 Sec	Subnet Mask: 255.255.255.248
	Default Gateway: 10.34.163.36
	Primary DNS Server: 168.95.1.1
	Secondary DNS Server: 168.95.192.1

Cellular

Connectivity: Connected	IMEI: 354073610000944
Operator: Chunghwa Telecom	IMSI: 466924205275481
APN: Internet	ICCID: 89886920042052754814
Service Type: LTE	MCC / MNC: 466 / 92
Roaming: Home	Cell ID: 62387549
Connection Mode: Auto	

Mobile Signal

LTE Band B3 📶


RSSI	RSRP	RSRQ	SINR
-83 dBm	-91 dBm	-9 dB	10 dB

Battery Capacity: Charging

Internet

Click on the **Internet** icon to bring up more details about your Internet connection. Click **IPv4** or **IPv6** to see details of the IPv4 and IPv6 connection respectively.

The **Home** page displays whether or not the F530 is currently connected to the Internet. If it is disconnected, click **Click to repair** to bring up the setup wizard, refer to **Setup Wizard** on **page 13** for more information.

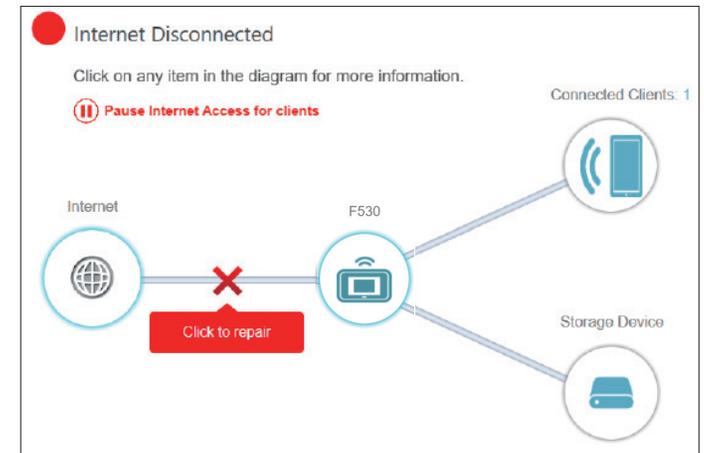

Internet

Click **Pause Internet Access for clients** to temporarily disconnect the Internet connection; alternatively, click **Resume Internet Access** to resume the Internet access if previously paused.

To reconfigure the Internet settings, click **Go to settings** at the bottom right.

The screenshot displays the Internet configuration interface. At the top, it indicates 'Internet Connected' with a green dot and a red button labeled 'Pause Internet Access for clients'. Below this is a network diagram showing the Internet connected to the F530 router, which is then connected to a mobile device and a storage device. The 'Connected Clients' count is 1. The 'Internet' section lists the following settings:

Primary Internet		IPv4 / IPv6	
SIM Card Status:	Detected	MAC Address:	0E:24:B3:97:3A:C7
Connection Type:	Cellular	IP Address:	10.34.198.66
Network Status:	Connected	Subnet Mask:	255.255.255.248
Connection Uptime:	0 Day 0 Hour 7 Min 15 Sec	Default Gateway:	10.34.198.67
		Primary DNS Server:	168.95.1.1
		Secondary DNS Server:	168.95.192.1

On the **Cellular** section, you can view the mobile connection parameter information such as IMEI and IMSI.

Connectivity: Displays whether the device is connected to a cellular network.

Operator: Displays the cellular operator.

APN: Access Point Name (APN) is used to set up a network connection to enable Internet access through cellular communication.

Service Type: Displays the cellular technology: Auto, 5G NR NSA, 5G NR SA, or LTE.

Roaming: Displays whether roaming is enabled or disabled. If enabled, additional service charge may apply depending on your plan.

The screenshot displays the Cellular configuration interface. It shows the following connection details:

Connectivity:	Connected	IMEI:	354073610000944
Operator:	Chunghwa Telecom	IMSI:	466924205275481
APN:	internet	ICCID:	89886920042052754814
Service Type:	LTE	MCC / MNC:	466 / 92
Roaming:	Home	Cell ID:	62387548
Connection Mode:	Auto		

Mobile Signal

RSSI	RSRP	RSRQ	SINR
-93 dBm	-100 dBm	-8 dB	14 dB

Battery Capacity: 79 %

Connection Mode: Auto or via Manual dial-up.

IMEI: The International Mobile Equipment Identity is a unique number assigned to every mobile device.

IMSI: The SIM card has a unique number called an International Mobile Subscriber Identity (IMSI). This is used to identify and authenticate users on cellular devices.

ICCID: The Integrated Circuit Card Identity is a unique number assigned to each SIM card.

MCC/MNC: The Mobile Country Code/The Mobile Network Code.

Cell ID: Indicates the cell tower or site.

Mobile Signal: Auto or the band number is displayed.

RSSI: Received Signal Strength Indication, which measures the power of a received radio signal. A value ≥ -50 indicates excellent quality.

RSRP: Reference Signal Received Power, which measures the power level in the LTE cell network. A value ≥ -80 indicates excellent quality.

RSRQ: Reference Signal Received Quality (RSRQ), which measures the quality of the received reference signal and is helpful in determining the amount of interference. A value ≥ -10 indicates excellent quality.

SINR: Signal-to-interference-plus-noise ratio, which measures the quality of wireless signal by taking account of noise and other interfering factors. A value ≥ 20 indicates excellent quality.

Battery Capacity: Shows whether the battery is charging or the remaining battery level.

F530

Click on the **F530** device icon to view details about the wireless and local network settings. This includes IPv4 and IPv6 local networks, and Wi-Fi information.

To reconfigure network settings, either click **Go to settings** at the bottom of the page, or click **Settings** on the left panel and select **Network**. Refer to **Network** on **page 40** for more information.

To reconfigure wireless settings, either click **Go to settings**, on the lower right, or click **Settings** on the left pane and select **Wireless**. Refer to **Wireless** on **page 33** for more information.

The screenshot displays the network configuration interface for the F530 device. At the top, it indicates 'Internet Connected' with a green dot and provides a link for 'New firmware available'. A warning icon suggests to 'Pause Internet Access for clients'. A network diagram shows the F530 router connected to the Internet, with one 'Connected Client' and a 'Storage Device' also connected to the router.

F530

<p>IPv4 Network</p> <p>MAC Address: 48:EE:0C:B2:59:99</p> <p>Router IP Address: 192.168.125.1</p> <p>Subnet Mask: 255.255.255.0</p>	<p>Wi-Fi</p> <p>Status: Enabled</p> <p>Wi-Fi Name (SSID): F530-5999</p> <p>Password: mhmx94639</p> <p>Go to settings</p>
<p>IPv6 Network</p> <p>Link-Local Address: FE80::4AEE:CFF:FEB2:5999</p> <p>Router IPv6 Address: FD79:9126:4916::1</p> <p>DHCP-PD: Enabled</p> <p>Assigned Prefix: Not Available</p> <p>Go to settings</p>	<p>Guest Zone</p> <p>Status: Enabled</p> <p>Wi-Fi Name (SSID): dlink-guest</p> <p>Password: mhmx94639</p> <p>Guest Zone 5GHz</p> <p>Status: Enabled</p> <p>Wi-Fi Name (SSID): dlink-guest-5GHz</p> <p>Password: mhmx94639</p> <p>Go to settings</p>

Connected Clients

Click on the **Connected Clients** icon to view details about the clients currently connected to the device.

To edit each client's settings, click the pencil icon on the client you want to edit.

Edit Rule

Name: Displays the name of this client. You can edit the client's name here.

Vendor: Displays the vendor of the device.


MAC Address: Displays the MAC address of the device.

IP Address: Displays the current IP address of this client.

Reserve IP: Enable to reserve an IP address for this client.

IP Address (Reserved): Specify an IP address for the DHCP server to assign to this client.

Click **Save** when you are done.

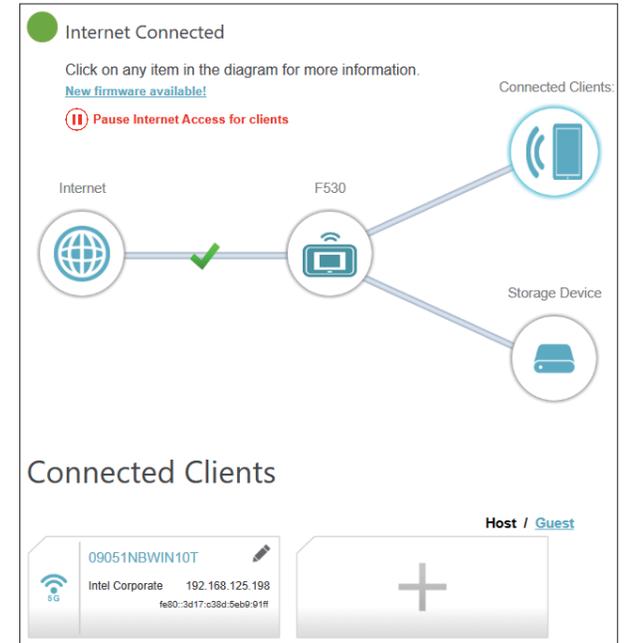

Edit Rule

Name:

Vendor: Intel Corporate

MAC Address: 3c:f0:11:3e:6c:9b

IP Address: 192.168.125.198

Reserve IP: Remaining: 24

IP Address (Reserved):

Storage Device

Click on the **Storage Device** icon to view details about the currently inserted microSD card as well as the Web File Access sharing settings.

If you have a microSD card installed, you can see its name and how much free space it has.

To configure your storage settings, click **Go to Settings** or click **Settings > Join N' Share** to obtain more information on storage configuration.


For information on how to access your shared drive via a web browser, refer to **Join N' Share on page 42**.



Settings Wizard

Go to **Settings > Wizard** to open the setup wizard. This is the same wizard that appears when you start configuring the F530 for the first time. Refer to **Setup Wizard** on **page 13** for details.

Note: *When the Wizard is opened, the device will be disconnected from the Internet.*

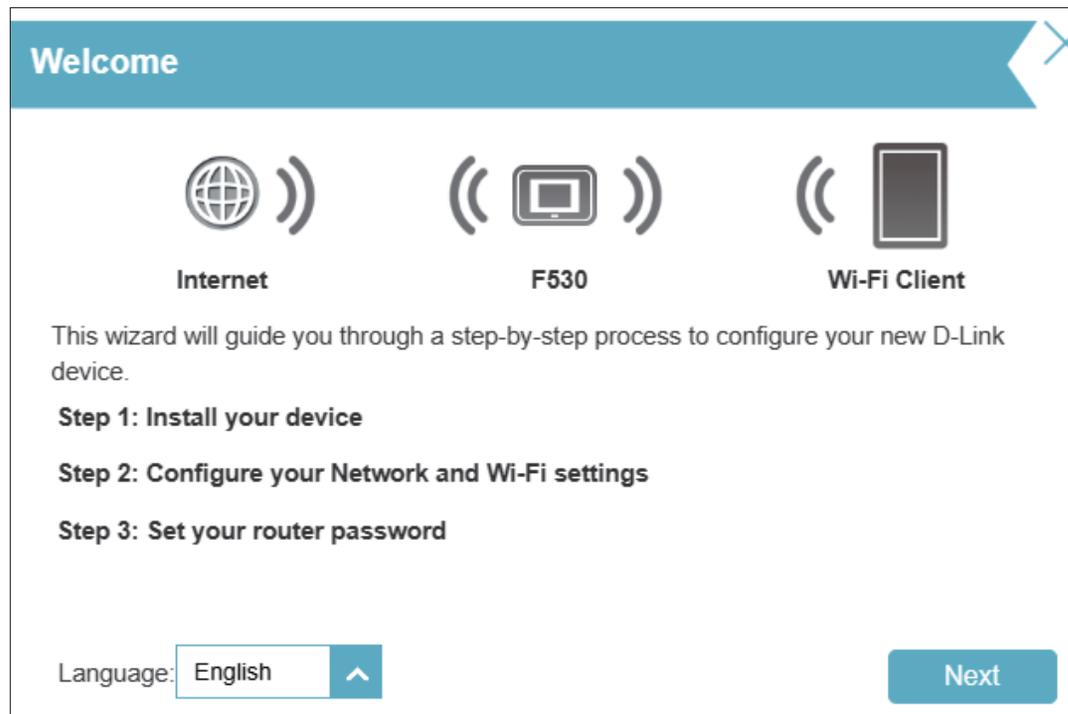

Cellular

From this page you can configure your mobile Internet settings. Click **Save** at any time to save the changes you have made on this page.

Connection Settings

Service Mode: From the drop-down menu, you can select the cellular technology: Auto, 5G NR NSA, 5G NR SA, or LTE.

Connection Mode: Select the connection mode: Auto or Manual.

Data Roaming: Enable or disable data roaming when the cellular service is outside the coverage area. Extra charges may apply depending on your service plan.

Dial-up Settings

APN Mode: Select Auto or Manual for setting the Access Point Name.

APN Name: Enter the Access Point Name if Manual mode is selected.


PDP Type: Select the IP addressing mechanism: IPv4, IPv6 or both.

Username: Enter the connection's username.

Password: Enter the connection's password.

Dial Number: Enter the number to dial.

Authentication Type Enter the authentication type to connect with the cellular service provider's server: Auto, PAP, CHAP, or NONE.

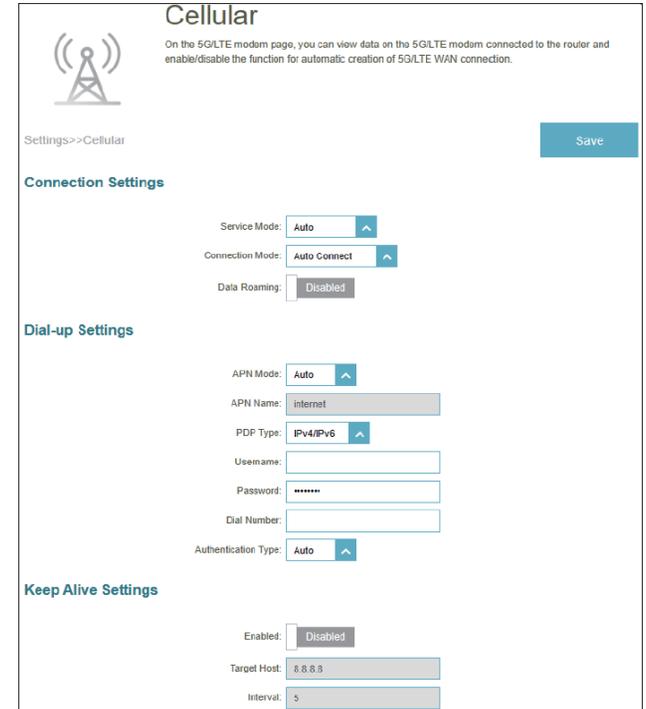

Cellular
On the 5G/LTE modem page, you can view data on the 5G/LTE modem connected to the router and enable/disable the function for automatic creation of 5G/LTE WAN connection.

Settings > Cellular Save

Connection Settings

Service Mode: Auto

Connection Mode: Auto Connect

Data Roaming: Disabled

Dial-up Settings

APN Mode: Auto

APN Name: internet

PDP Type: IPv4/IPv6

Username:

Password:

Dial Number:

Authentication Type: Auto

Keep Alive Settings

Enabled: Disabled

Target Host: 8.8.8.8

Interval: 5

Keep Alive Settings

Enable: Select this option to activate the keep-alive function.

Target host: Enter the IP address to which ICMP packets will be sent periodically to monitor network connectivity.

Interval: Specify how often the packets are sent, in seconds

Internet

The Internet page allows you to configure Internet connection settings of the device. From this page you can configure the IPv6 Internet addressing method.



The screenshot shows the IPv6 configuration page. At the top left is a lock icon with a globe inside. To its right is the title "IPv6" and a subtitle "All of your IPv6 Internet and network connection details are displayed on this page." Below the lock icon is a breadcrumb trail: "Settings>>Internet>>IPv6". To the right of the breadcrumb is a blue "Save" button. Below the breadcrumb is a dropdown menu labeled "My Internet Connection is:" with the selected option "Auto Configuration (SLAAC/DHCPv6)". Below this is a section header "IPv6 DNS SETTINGS" followed by a dropdown menu labeled "DNS Type:" with the selected option "Obtain a DNS server address automatically". Below this is another section header "LAN IPv6 ADDRESS SETTINGS" followed by a toggle switch labeled "Enable DHCP-PD:" which is currently set to "Enabled". Below the toggle is the text "LAN IPv6 Link-Local Address: FE80::4AEE:CFF:FE80:622A/64". At the bottom right of the page is a link labeled "Advanced Settings..."

IPv6 - Auto Configuration (SLAAC/DHCPv6)

Select **Auto Configuration (SLAAC/DHCPv6)** if your ISP assigns your IPv6 address when your device requests one from the ISP's server. Some ISPs require you to adjust these settings before your device can connect to the IPv6 Internet. Click **Save** when you are done.

IPv6 DNS Settings

DNS Type Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

Primary DNS Server If you select **Use the following DNS address**, enter the primary DNS server address

Secondary DNS Server If you select **Use the following DNS address**, enter the secondary DNS server address.

LAN IPv6 Address Settings

Enable DHCP-PD Enable or disable prefix delegation services.

LAN IPv6 Link-Local Address Displays the device's LAN link-local address.

If **Enable DHCP-PD** is disabled, these additional parameters are available for configuration:

LAN IPv6 Address Enter a valid LAN IPv6 address.

LAN IPv6 Link-Local Address Displays the device's LAN link-local address.

The screenshot shows the IPv6 configuration page with the following settings:

- IPv6 DNS SETTINGS:**
 - DNS Type: Obtain a DNS server address automatically
- LAN IPv6 ADDRESS SETTINGS:**
 - Enable DHCP-PD: Enabled
 - LAN IPv6 Link-Local Address: FE80::4AEE:CFF:FE80:622A64
- ADDRESS AUTOCONFIGURATION SETTINGS:**
 - Enable Automatic IPv6 Address Assignment: Enabled
 - Enable Automatic DHCP-PD in LAN: Enabled
 - Autoconfiguration Type: SLAAC+RDNSS
 - Router Advertisement Lifetime: 10 minutes

IPv6 - Auto Configuration (SLAAC/DHCPv6)

Advanced Settings... - Address Autoconfiguration Settings

Enable Automatic IPv6 Address Assignment Enable or disable the Automatic IPv6 Address Assignment feature. Enabling this feature will present additional configuration options.

Enable Automatic DHCP-PD in LAN Enable or disable Automatic DHCP-PD in LAN for other IPv6 routers/gateways to be connected to the LAN interface. This option is only available if **Enable DHCP-PD** is enabled in the above **LAN IPv6 ADDRESS SETTINGS**.

Note: This feature requires a smaller subnet prefix than /64 (i.e. allowing for a larger address allocation), such as /63. Contact your ISP for more information.

Autoconfiguration Type Select **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, or **Stateful DHCPv6**.

If **SLAAC+RDNSS** or **SLAAC+Stateless DHCP** is selected as the Autoconfiguration Type:

Router Advertisement Lifetime Enter the router advertisement lifetime (in minutes). The default is 10.

If **Stateful DHCPv6** is selected as the Autoconfiguration Type:

IPv6 Address Range (Start) Enter the starting IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Range (End) Enter the ending IPv6 address for the DHCP server's IPv6 assignment.

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment: Enabled

Enable Automatic DHCP-PD in LAN: Enabled

Autoconfiguration Type: Stateful DHCPv6

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment: Enabled

Autoconfiguration Type: SLAAC+RDNSS

Router Advertisement Lifetime: 10 minutes

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment: Enabled

Autoconfiguration Type: SLAAC+Stateless DHCP

Router Advertisement Lifetime: 10 minutes

ADDRESS AUTOCONFIGURATION SETTINGS

Enable Automatic IPv6 Address Assignment: Enabled

Enable Automatic DHCP-PD in LAN: Enabled

Autoconfiguration Type: Stateful DHCPv6

IPv6 Address Range (Start): :00 01

IPv6 Address Range (End): :00 FF

Wireless

From this page you can configure your Wi-Fi settings. Click **Save** at any time to save the changes you have made on this page.

Smart Connect

Status: Enable or disable the Smart Connect Feature. The Smart Connect feature presents a single wireless network. When connecting clients to the Wi-Fi network, the clients will be automatically added to the best band, either 2.4 GHz or 5 GHz

If Smart Connect Status is Enabled:

Wireless

Wi-Fi Name (SSID): Enter a name for your Wi-Fi network. Up to 16 characters are allowed.

Password: Create a password for your Wi-Fi network. Wireless clients will need to enter this password to successfully connect to the network. The password must be 10–20 characters in length, contain both letters and numbers, and must not have identical characters consecutively.

The screenshot shows the 'Wireless' configuration page. At the top, there's a Wi-Fi icon and the title 'Wireless'. Below it, a note says: 'Use this section to configure the wireless settings for your D-Link Router. Please make sure that any changes made in this section will need to be updated on your wireless device.' The page has a breadcrumb 'Settings->Wireless' and a 'Guest Zone' button. The 'Smart Connect' section has a 'Status' dropdown set to 'Enabled'. The 'Wireless' section has a 'Status' dropdown set to 'Enabled', a 'Wi-Fi Name (SSID)' field with 'DDR-330-G-022A', and a 'Password' field with 'marches3048'. An 'Advanced Settings' link is visible at the bottom right.

Wireless

Wireless - Advanced Settings

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal (the default)**, **WPA2/ WPA3-Personal**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these. Note that WPS will be disabled if WPA3 or None is used.

DFS Channel: Enable Dynamic Frequency Selection (DFS) channels to use additional channel options if the device is not in an area close by an airport or a radar station. If enabled, the device will listen for radar signals, and if radar signals are detected, it will automatically switch to a new channel. The default is disabled.

Transmission Power: Select a desired wireless transmission power. The default is high.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to **Always Enable** or you can add your own schedule.

To add a schedule: Each box represents half an hour, with the clock time (0~23) at the top of each column.

To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

The screenshot shows the following settings:

- Security Mode: WPA3-Personal
- DFS Channel: Disabled
- Transmission Power: High
- Schedule: Always Enable

When Smart Connect Status is disabled, 2.4 GHz and 5 GHz configuration options become available.

2.4 GHz / 5 GHz

Status: Enable or disable the 2.4 GHz / 5 GHz wireless network.

Wi-Fi Name (SSID): Create a name for your wireless network. Up to 16 characters are allowed.

Password: Create a Wi-Fi password. Wireless clients will need to enter this password to successfully connect to the network. The password must be 10–20 characters long, include letters and numbers, and not contain consecutive identical characters.

2.4 GHz - Advanced Settings...

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal** (the default), **WPA2/WPA3-Personal**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these. Note that WPS will be disabled if WPA3 or None is used.

802.11 Mode (2.4GHz): Select a desired wireless networking standard to use. The available options for the 2.4 GHz wireless network are **Mixed 802.11b/g/n/ax**, **Mixed 802.11b/g/n**, **Mixed 802.11b/g**, **Mixed 802.11g/n**, **802.11b only**, **802.11g only**, or **802.11n only**.

Wi-Fi Channel: Select a desired channel. The default is **Auto** (recommended).

Transmission Power: Select a desired wireless transmission power: High, Medium, or Low.

Channel Width (2.4GHz): Select **Auto 20/40 MHz** if you are using a mix of 802.11ax, 802.11n, and older standards (802.11b/g) and select **20 MHz** if you are using a mix of 802.11b/g devices.

HT20/40 Coexistence Allows the device to reduce the channel width to 20 MHz automatically when interference is detected.

Visibility Status: The default setting is **Visible**. Select **Invisible** if you do not want to broadcast the SSID of your wireless network.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to Always Enable or you can add your own schedule.

To add a schedule:

Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

The screenshot shows the '2.4GHz' configuration page. At the top, there is a 'Status' dropdown set to 'Enabled'. Below it are input fields for 'Wi-Fi Name (SSID)' with the value 'DBR-330-57BE' and 'Password' with the value 'cdfqg83678'. A link for 'Advanced Settings...' is visible on the right. The main configuration area includes several dropdown menus: 'Security Mode' set to 'WPA2-Personal', '802.11 Mode' set to 'Mixed 802.11b/g/n/ax', 'Wi-Fi Channel' set to 'Auto', 'Transmission Power' set to 'High', 'Channel Width' set to 'Auto 20/40 MHz', 'HT20/40 Coexistence' set to 'Enabled', 'Visibility Status' set to 'Visible', and 'Schedule' set to 'Always Enable'.

5 GHz - Advanced Settings...

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal** (the default), **WPA2/WPA3-Personal**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these. Note that WPS will be disabled if WPA3 or None is used.

802.11 Mode (5 GHz): Select a desired wireless networking standard to use. The available options for the 5 GHz wireless network are **Mixed 802.11a/n/ac/ax**, **Mixed 802.11a/n/ac**, **Mixed 802.11a/n**, **802.11ac only**, **802.11a only**, or **802.11n only**.

Wi-Fi Channel: Select a desired channel. The default is **Auto** (recommended).

DFS Channel: Enable Dynamic Frequency Selection (DFS) channels to use additional channel options if the device is not in an area close by an airport or a radar station. If enabled, the device will listen for radar signals, and if radar signals are detected, it will automatically switch to a new channel. The default is disabled.

Transmission Power: Select a desired wireless transmission power: High, Medium, or Low. The default is High.

Channel Width (5 GHz): Select **Auto 20/40/80/160 MHz** if you are using a mix of 802.11ax, 802.11ac, 802.11n, and 802.11a devices, select **Auto 20/40 MHz** if you are using 802.11n and 802.11a devices, or select **20 MHz** if you are using 802.11a devices only. The 160 MHz is only available if DFS is enabled.

Visibility Status: The default setting is **Visible**. Select **Invisible** if you do not want to broadcast the SSID of your wireless network.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to Always Enable or you can add your own schedule.

To add a schedule:

Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

5GHz

Status: Enabled

Wi-Fi Name (SSID):

Password:

Advanced Settings

Security Mode:

802.11 Mode:

Wi-Fi Channel:

DFS Channel: Enabled

Transmission Power:

Channel Width:

Visibility Status:

Schedule:

Wi-Fi Protected Setup

The easiest way to connect your wireless devices to your device is with Wi-Fi Protected Setup (WPS).

WPS: Press the WPS button to initialize the WPS process, then press the WPS button on the wireless client within 120 seconds. To pair with a client, please refer to the user manual of the wireless client. Note that only WPA2 encryption can be used with WPS.



Guest Zone

The **Guest Zone** feature will allow you to create a temporary wireless network for guests to access the Internet. This zone will be separate from your main Wi-Fi network.

In the **Settings** menu on the left side of the page, click **Wireless**, then click the **Guest Zone** link. Click **Save** at any time to save the changes you have made on this page.

Wireless

Status: Enable or disable the Guest Wi-Fi network. The default is disabled.

Wi-Fi Name (SSID): Enter a name for your guest wireless network.

Password: Create a password for your guest Wi-Fi network. The password must be 10–20 characters long, include letters and numbers, and not contain consecutive identical characters. Wireless clients will need to enter this password to successfully connect to the network.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to **Always Enable** or you can add your own schedule.

To add a schedule:

Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

The screenshot shows the 'Guest Zone' configuration page. At the top, there are two person icons and the title 'Guest Zone'. Below the title is a descriptive paragraph: 'This page lets you enable and configure a Wi-Fi Guest Zone. Users connected to a Guest Zone cannot communicate or detect devices on your home network unless Internet Access Only is disabled under Home Network Access.' Below this is a breadcrumb trail 'Settings>>Wireless>>Guest Zone' and two buttons: 'Wi-Fi' and 'Save'. The main content area is titled '5GHz' and contains several settings: 'Status' is set to 'Disabled', 'Wi-Fi Name (SSID)' is 'dlink-guest-5GHz', 'Password' is 'd!bbpy83904', and 'Schedule' is 'Always Enable' with a '+' button. At the bottom, there is a 'Security Mode' dropdown set to 'WPA/WPA2-Personal' and a link for 'Advanced Settings...'.

Advanced Settings

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal**, **WPA2/WPA3-Personal**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these.

Home Network Access

Internet Access Only: Enabling this option will confine connectivity to the Internet, preventing guests from accessing other local network devices.

Home Network Access

Internet Access Only: Enabled

Network

This section allows you to change the local network settings of the hotspot and configure the DHCP settings. In the Settings menu on the left side of the page, click **Network**. Click **Save** at any time to save the changes you have made on this page.

Network Settings

LAN IP Address: Enter the IP address of the hotspot. The default IP address is **192.168.125.1**.

If you change the IP address, you will need to enter the new IP address in your browser to get back into the configuration utility.


Subnet Mask: Enter the subnet mask of the device. The default subnet mask is **255.255.255.0**.

Management Link: The default address to access the device's configuration is **http://F530-xxxx.local/** (where xxxx represents the last 4 digits of your hotspot's MAC address). You can replace **F530-xxxx** with a name of your choice.

Local Domain Name: Enter the domain name (optional).

Enable DNS Relay: Disable to transfer the DNS server information from your ISP to your computers. If enabled, your computers will use the device's setting for a DNS server.

Status: Enable or disable the DHCP server.

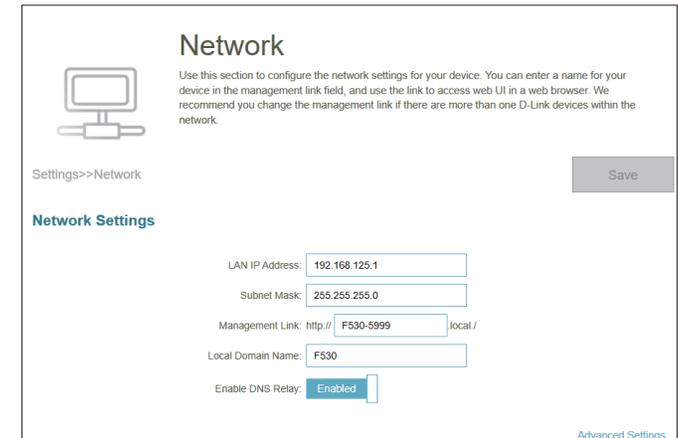

Network

Use this section to configure the network settings for your device. You can enter a name for your device in the management link field, and use the link to access web UI in a web browser. We recommend you change the management link if there are more than one D-Link devices within the network.

Settings>>Network Save

Network Settings

LAN IP Address:

Subnet Mask:

Management Link:

Local Domain Name:

Enable DNS Relay: Enabled

[Advanced Settings](#)

Network

DHCP Server

DHCP IP Address Range: Enter the starting and ending IP addresses for the DHCP server's IP assignment.

Note: *If you have reserved static IP addresses for client devices, make sure the IP addresses are outside of this range or you might have an IP conflict.*

DHCP Lease Time: Enter the length of time for the IP address lease in minutes. The default is 10080 minutes.

Always Broadcast: Enable this feature to broadcast your network's DHCP server to LAN/WLAN clients.

The screenshot shows the DHCP Server configuration page. It includes the following settings:

- Status: Enabled
- DHCP IP Address Range: 192.168.125.100 to 192.168.125.249
- DHCP Lease Time: 10080 minutes
- Always Broadcast: Disabled (compatibility for some DHCP Clients)

Join N' Share

This page allows you to configure access to files stored on a microSD card installed in the hotspot. The built-in Join N' Share web-based file sharing further allows you to perform file sharing through local and remote network. To access this page, go to **Settings > Join N' Share**.

Join N' Share

Status: Enable or disable the file sharing function (the default is disabled). Computers and devices will be able to access the files on the microSD installed on this hotspot through a web browser.

Login Account/Password: The login credentials for accessing the web file sharing (this is your device's admin account and password). To modify it, go to **Management > System Admin**.

Local Access Port: Enter a service port number for local file sharing. The default is 4433.

Local Access Link: The web address for accessing the web file sharing.


Remote Access

Remote Access: Enable remote file sharing to permit remote file access across the Internet.

Remote Access Port: Enter a service port number for remote file access across the Internet. The default is 8080.

Remote Access Link: The web address for accessing the web file sharing over the Internet.

Note: You can access the Join N' Share local site from the D-Link FALCON App. Refer to **Join N' Share App Setup** on **page 62**.

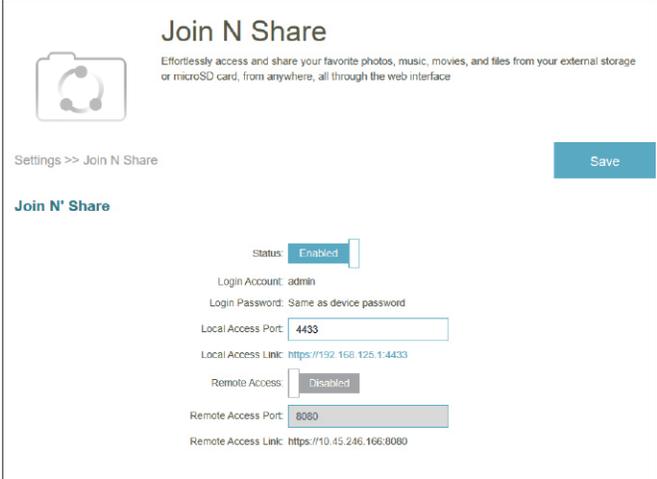

Join N' Share

Effortlessly access and share your favorite photos, music, movies, and files from your external storage or microSD card, from anywhere, all through the web interface

Settings >> Join N' Share Save

Join N' Share

Status: Enabled

Login Account: admin

Login Password: Same as device password

Local Access Port:

Local Access Link:

Remote Access: Disabled

Remote Access Port:

Remote Access Link:

Join N' Share Web Access

This page allows you to access the inserted microSD card through file sharing. Simply open your browser and enter the Local Access Link displayed on the Storage Device page (see **Storage Device** on **page 26**). The Join N' Share site also lets you create user accounts with different access privileges. This section explains the available features and configuration options designed to simplify file management.

To begin, enter the *admin* username and password configured for F530.

Viewing and Accessing the Files

The functional buttons at the top right provide the following options to help you manage the files in the current directory. Additional buttons will appear after selecting a folder or a file.

- Share:** Share the selected file with a pre-configured duration and password for accessing it. Note the Share function only appears after you select an item. 
- Rename:** Rename the selected file. Note the Rename function only appears after you select an item. 
- Copy:** Copy the selected file to a new location. Note the Copy function only appears after you select an item. 
- Move file:** Move the selected file to a new location. Note the Move function only appears after you select an item. 




Join N' Share

Username

Password

Login

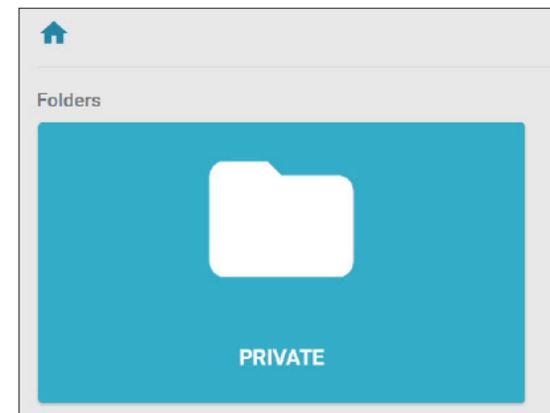

Delete: Delete the selected file. Note the Delete function only appears after you select an item.



View Mode: Change how your folders and files look and the displayed information alongside them. The following view modes are available:



Details: Show information about your files and folders. In this view, folders show last modified date; files show file size and last modified date.

Tiles: Show icons of each item. Both files and folders display the last modified date, as well as the file size for each file.

Large icon: Show the largest available view of file and folder icons. In this view, only the name of the file or folder is displayed.

Note: Toggle the icon to switch between views.

Upload: Upload files and folders from your local device.



Download: Download the selected file or folder. The number of selected items will be displayed beside the icon.




Information: The information icon displays the file or folder information. If no items are selected, the information of the current folder will be displayed, for example, the total number of items in the current folder. If multiple items are selected, the number of items and the total size will be displayed.



Select Multiple: Select multiple items to perform the above listed functions. You can deselect an item by clicking it again.



Search: The search box is at the top left of the webpage. It allows you to search for subfolders, documents, and images in the current folder.

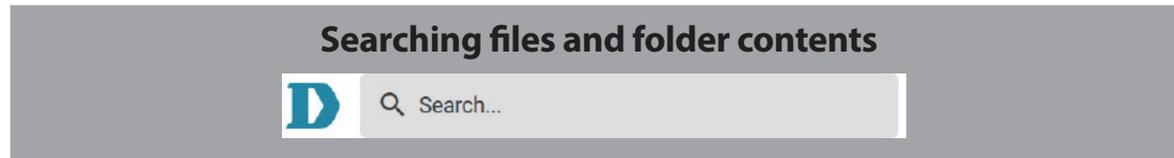

You can perform searches by just entering a keyword in the search box. The powerful search function will find file names and folder contents among the current folder items containing your keyword. You can refine your search by selecting the file type first: Image, Music, Video, or PDF. After typing your keyword, press the enter key. You can then open your file directly to view its content if the file type is supported by your browser.

Sharing Files and Folders

File Sharing allows you to share a file or folder to anyone with a valid link.

To share a file, select the file and click :



Share Duration: Specify how long the share link will be available. If no duration is selected, the link will remain permanent.

Optional password: Protect the accessibility of the share file. You can leave it blank if no password is required for file access.

Click **Share**. Renaming Files and Folders


Copy to Clipboard: Copy the share link for others to access using a browser.

Delete: Reset the sharing properties.

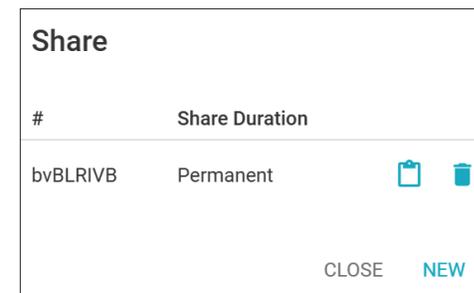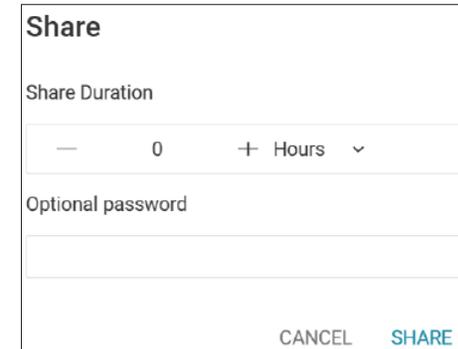

Renaming a file allows you to change the name of an item.

Select the file you want to rename and click the Rename icon at the top right. When the Rename screen appears, type a new name for the file, then click **Rename**.

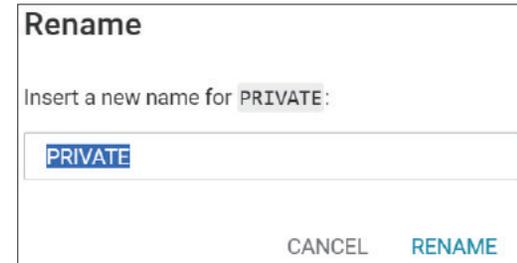


Copying Files and Folders

Copying Files and Folders allows you to replicate selected files and folders to a desired destination. Copying Files and Folders can be performed on multiple items.

To copy multiple items, select  first, select your desired files, then click  :

New Folder: Create a new folder as the destination for the selected files.

Copy: Create a copy of the selected files and folders.

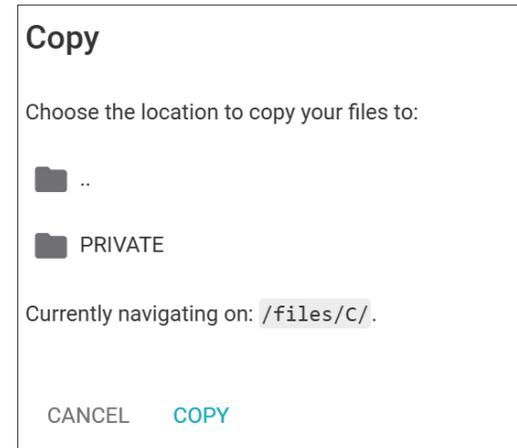


Moving Files and Folders

Moving Files allows you to change the location of files and folders. Moving Files and Folders can be performed on multiple items.

To move multiple items, select  first, and select your desired files, then click  :

New Folder: Create a new folder as the destination for the selected files.

Move: Move the selected files and folders to a designated directory.

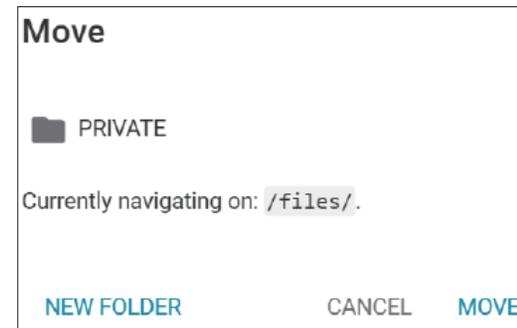

Downloading Files and Folders

Downloading Files allows you to save a copy of the files to your local drive. Downloading Files and Folders can be performed on multiple items.

To download multiple items, select  first and select your desired files (the number of

selected items will be shown next to the Download icon), then click Download. 

Format: Select the format to zip your files as a single one.

The file will be saved to the default download directory of your browser.

Download files

Choose the format you wish to download.

zip

tar

tar.gz

tar.bz2

tar.xz

tar.lz4

tar.sz

tar.br

tar.zst

Uploading Files and Folders

Uploading Files allows you to upload a copy of the selected files from your local device.

To upload a file or folder, click .

File/Folder: Select a folder to upload all of its contents or select multiple files to upload. Locate the files in your local directory. It may take a while depending on the size of the files.

The uploaded files should be displayed in the current directory.

Upload

Select an option to upload.



File



Folder

Viewing File Information

Different information will be shown with respect to the file type. Without selecting a file, click Information to list the total number of files and folders under the current directory. Select a single file and click Information to display its name, size, last modified time, and related hash value such as MD5, SHA1, SHA256, and SHA512. These hash values are used for verifying the integrity of the file.

File information

Display Name: PRIVATE

Last Modified: 4 months ago


OK

Managing the File Structure

My files: Lists all the files in the shared directory.

New folder: Click to create a new folder under the current directory. The path of your current folder is shown at the top. It helps you navigate through the file structures. You can easily go backward.

New file: Click to create a new file (text) under the current directory. The path is shown at the top. It helps you navigate through the file structures.

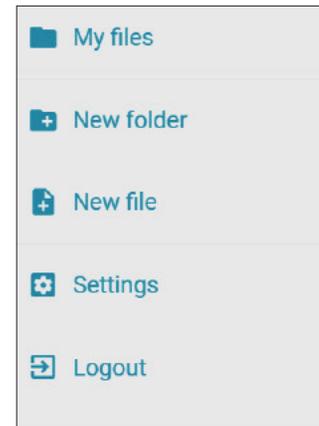

Settings


The Settings menu provides controls on how the file or folder information should be presented.

Profile Settings

Profile Settings are used for customizing the file information. The following file or folder properties can be defined.

Hide dotfiles: Dotfiles (e.g. config files of programs) will not be displayed.

Use single clicks to open files and directories: This permits users to open files with a single click instead of a double-click.

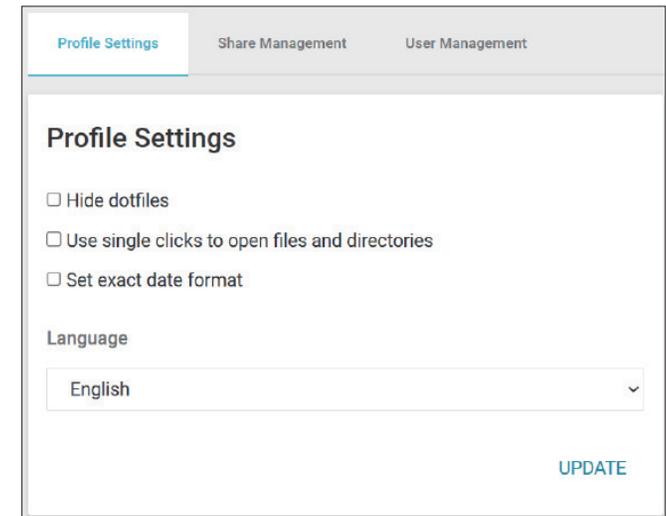

Set exact date format: The last modified date will be expressed as mm/dd/yyyy hh:mm AM/PM. If this option is not checked, the date will be expressed as duration.

Language: Select the display language for the web.

Share Management

The Share Management tab shows the sharing properties of a share folder.

Path: The path of the shared folder

Share Duration: The duration of the sharable link.

Username: The user that has been granted access to this folder.

User Management

The User Management tab lists all the current users with the username and the authorized directory for access.

To create a new user, click **New**:

Username: Name the new user.

Password: Type the password of the new user. The password must be 10–15 character long, include both upper- and lower-case letters and digits, and must not have identical characters in a row.

Scope: The directory permitted access. The "" means root directory, which means permitting every file and folder of the currently shared drive.

Language: The language that is displayed on the web file access page.

Prevent the user from changing the password: Check this box to prevent users from changing the set password.

Path	Share Duration	Username		
/PRIVATE/	Permanent	admin	🗑️	📄
/PRIVATE/	Permanent	admin	🗑️	📄

Username	Admin	Scope
admin	✓	/

Permissions: Choose a specific permission for the user:

- Create files and directories
- Delete files and directories
- Download
- Edit files
- Rename or move files and directories
- Share files

The user can manage the shared file or folder through the file access controls.

Rules: Rules define a set of file permissions that permit (by selecting **Allow**) or block a user's access to specific files. A regular expression (regex) is used to define search patterns for matching file names in access control. For example, the expression **abc** matches any file name containing the sequence "abc." And to match both .jpg and .png files, use the regex pattern: **\.(jpg | png)\$**.

The screenshot shows a 'New User' configuration window. It has several input fields: 'Username', 'Password', 'Scope', and 'Language' (set to English). Below these is a 'Permissions' section with a list of checkboxes: 'Create files and directories', 'Delete files and directories', 'Download', 'Edit files', 'Rename or move files and directories', and 'Share files'. All these checkboxes are checked. There is also a 'Rules' section at the bottom with a text area and a 'Save' button.

D-Link Cloud

In the **Settings** menu on the left side of the page, click **D-Link Cloud** to see your D-Link Cloud Service details. This page shows whether you are registered with D-Link Cloud Service and your email address associated with the account. Use the D-Link FALCON App to find out more about D-Link Cloud's features.



D-Link Cloud

D-Link Cloud Service enables third-party service integration for your device through the cloud. Please view your account information that is currently associated with your device's D-Link Cloud account. To find out more about D-Link Cloud's features, simply download the EAGLE PRO AI App from the App Store or Google Play™ to your mobile device.

Settings>>D-Link Cloud

D-Link Cloud Registration

D-Link Cloud Service: Unregistered

Features

Data Cap

Go to **Features > Data Cap** to configure the Data Cap settings for your hotspot. You can monitor the data usage in real-time and receive alert messages when you reached your data usage allowance.

Click **Save** at any time to save the changes you have made on this page.

Cellular Data Cap Settings

Data Cap: Enable or disable data cap.

Amount: Set the maximum data usage allowance in GB.

Warning Ratio (%) Set the percentage of data usage to which an alert message will be triggered.

Reset Date Monthly: Enter a day of the month in which the data usage will be reset.

Current data consumption: The amount of Internet data used already for the current billing month.

Send SMS: Enable or disable Send SMS when the data cap is reached.

Phone Number: When **Send SMS** is enabled, enter the phone number for an alert message to be sent.

Note: Sending SMS messages may incur additional fees. Please contact your ISP for more information.

Advanced >> Cellular Data Cap

Cellular Data Cap Settings

Data Cap: Enabled

Amount: GB

Warning Ratio (%): ^

Reset Date monthly:

Current data consumption: 0.000 GB

Send SMS: Disabled

SMS

Go to **Features > SMS** to send or receive SMS messages. This page shows all messages that are stored on the SIM card. Click **Save** at any time to save the changes you have made on this page.

Cellular SMS Settings

SMS: Enable or disable the SMS receiving function.

Storage: Select **SIM Card** or **Module** to store the SMS messages.

Keep Message: Enable or disable Keep Message.

Keep Number: Set the amount of SMS messages to be saved. Up to 20 messages can be saved.

Click **New SMS** to create new SMS messages.

New SMS

Phone Number: Enter the recipient's phone number, including "+" and the country code for international numbers. For example, enter +886xxxxxxx for a mobile number in Taiwan.

Message: Enter your message here.

From the SMS page, click on **Inbox** to manage the SMS messages you have received. Select a message to display its content in a separate window below. After you read it, you can delete it.

Inbox

- Status:** Displays the status of the message.
- ID:** Displays the sender's ID.
- Read:** Click on the respective message to open its content.




: Indicates unread.



: Indicates read.

- Date Time:** Displays the date and time at which the message is received.
- From Phone Number:** Displays the phone number of the sender.
- Message Preview:** Displays a preview of the message.
- Delete:** Delete the selected SMS message.

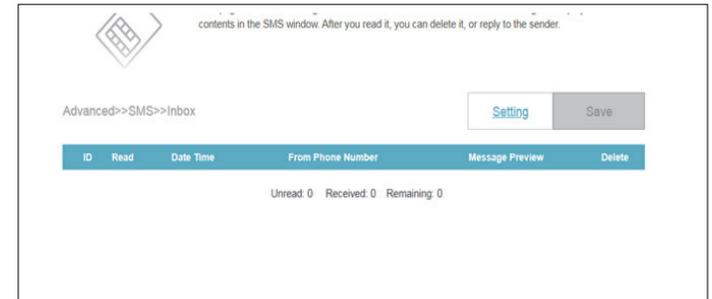

PIN

Go to **Features > PIN** to configure your SIM card's PIN. Click **Save** at any time to save the changes you have made on this page.

SIM PIN Lock Settings

SIM PIN Lock Settings: Enable or disable SIM PIN Lock. To unlock a SIM, toggle this option to disabled. You will then be prompted to enter the required PIN.

SIM Card Status: Displays the status of your SIM card.

To change your SIM's PIN, enter a new PIN in the PIN text field. After enabling your PIN protection, you'll have to input your PIN whenever your SIM card is reinstalled.

Click **Apply** when you are done.



Dynamic DNS

A Dynamic DNS (DDNS) service lets users access a server using a domain name, regardless of changing IP addresses, which is ideal for hosting virtual servers. Click **Save** at any time to save the changes you have made on this page.

In the **Features** tab on the left side of the page, click **Dynamic DNS**.

Enable Dynamic DNS: Enable or disable dynamic DNS. Enabling this feature will reveal further configuration options.

Status: Displays the current dynamic DNS connection status.

Server Address: Select a Dynamic DNS server from the drop-down menu.

Host Name: Enter the host name that you registered with your dynamic DNS service provider.

User Name: Enter your dynamic DNS username.

Password: Enter your dynamic DNS password.

Time Out: Enter a time-out value (in hours) to indicate how often the device should update its Dynamic DNS settings.

The screenshot shows the 'Dynamic DNS' configuration page. At the top, there is a title 'Dynamic DNS' and a brief description: 'Dynamic Domain Name Service allows your router to associate an easy-to-remember domain name such as [YourDomainName].com with the regularly changing IP address assigned by your Internet Service provider. This feature is helpful when running a virtual server.' Below this, there is a 'Save' button. The main configuration area includes:

- 'Enable Dynamic DNS:' with a toggle set to 'Enabled'.
- 'Status:' showing 'Disconnected'.
- 'Server Address:' with a dropdown menu currently showing 'no-ip.com' and a list of other options.
- 'Host Name:', 'User Name:', and 'Password:' (masked with asterisks) text input fields.
- 'Time Out:' with a value of '24' and a unit of 'hours'.

 At the bottom, there is a table header with columns: 'Status', 'Host Name', 'IPv4 Address', 'Edit', and 'Delete'. Below the header is an 'Add Record' button and a 'Remaining: 10' indicator.


Dynamic DNS

At the bottom of the page are the IPv6 host settings. A maximum of 10 records can be defined. To remove a record, click on its trash can icon in the Delete column. To edit a rule, click on its pencil icon in the Edit column. To create a new record, click the **Add Record** button. Click **Save** when you are done. If you edit or create a record, the following options will appear:

Host Name: Enter the host name that you registered with your dynamic DNS service provider.

IPv6 Address: Enter the IPv6 address of the dynamic DNS server. Alternatively, select a server device in the drop-down menu.

Click **Apply** when you are done.

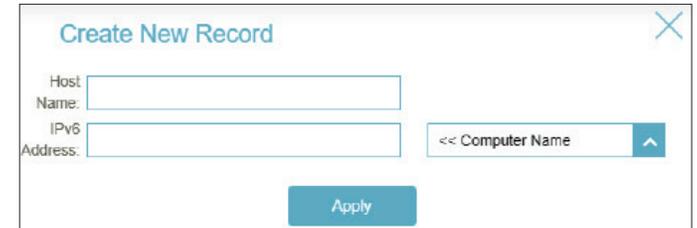

The screenshot shows a dialog box titled "Create New Record" with a close button (X) in the top right corner. It contains two input fields: "Host Name:" and "IPv6 Address:". The "IPv6 Address:" field has a dropdown menu next to it showing "<< Computer Name". Below the fields is a blue "Apply" button.

Management

Time

The **Time** page allows you to configure, update, and maintain the correct time for the internal clock system. From here you can set the time zone and the Network Time Protocol (NTP) server.

In the **Management** tab on the left side of the page, click **Time**. Click **Save** at any time to save the changes you have made on this page.


Time Configuration

Time Zone: Select your time zone from the drop-down menu.

Time: Displays the current date and time of the device.

Automatic Time Configuration

NTP Server: Select one of the following servers from the drop-down menu to synchronize the time and date for your device:
D-Link NTP Server or Google NTP Server.
Choose Manual to set the NTP server's IP address or domain name.

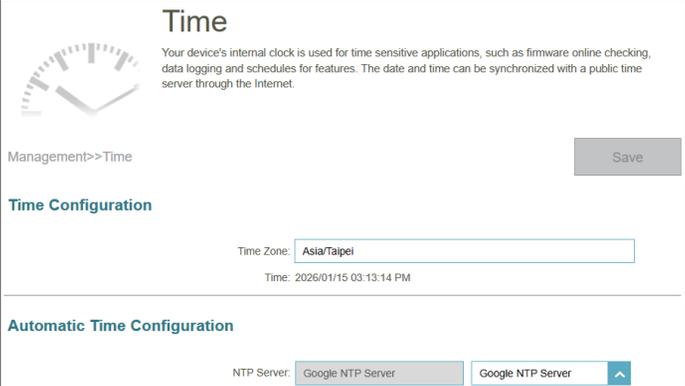

The screenshot shows the 'Time' configuration page. At the top, there is a clock icon and the title 'Time'. Below the title, a note states: 'Your device's internal clock is used for time sensitive applications, such as firmware online checking, data logging and schedules for features. The date and time can be synchronized with a public time server through the Internet.' To the right of this note is a 'Save' button. Below the note, the breadcrumb 'Management >> Time' is displayed. The 'Time Configuration' section includes a 'Time Zone' dropdown menu set to 'Asia/Taipei' and a 'Time' display showing '2026/01/15 03:13:14 PM'. The 'Automatic Time Configuration' section features an 'NTP Server' dropdown menu with 'Google NTP Server' selected and a small blue arrow icon to its right.

System Admin

Admin

This page allows you to change the administrator (Admin) password and enable the HTTPS server. In the **Management** tab on the left side of the page, click **System Admin**. Click **Save** at any time to save the changes you have made on this page.

Admin Password

Password: Enter a new password for the administrator account. This password is required to access the hotspot's web configuration interface and to log in to the Join N' Share website.

Advanced Settings - Administration

Power Saving: Select the power saving mode:



- Battery:** Maximizes battery life by minimizing power consumption. In this mode, the CPU operates at the lowest frequency, and beacon transmissions are sent at the lowest rate.
- Balance:** Maintains a balance state between performance and power usage. In this mode, the CPU operates at the normal frequency, and beacon transmissions are sent at the standard rate.
- Performance:** Maintains system at a high-performance state with increased power consumption. In this mode, the CPU operates at the highest frequency, and beacon transmissions are sent at the standard rate.

Enable HTTPS Management: Enable **HTTPS Management** to connect to the hotspot locally using encrypted HTTPS connection.

Enable HTTPS Remote Management: Enable **HTTPS Remote Management** over the Internet using encrypted HTTPS connection.

Remote Admin Port: The port number is used in the URL to access the web configuration page. The default port number is **8081**.

Note: If you enabled **HTTPS Remote Management** and wish to access the hotspot remotely and securely, you must enter `https://` at the beginning of the address.

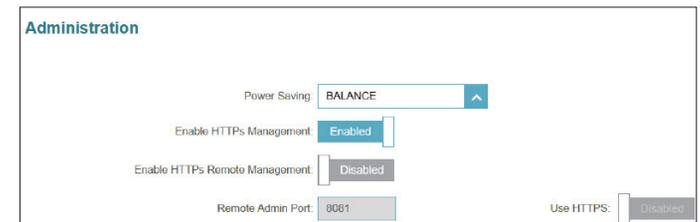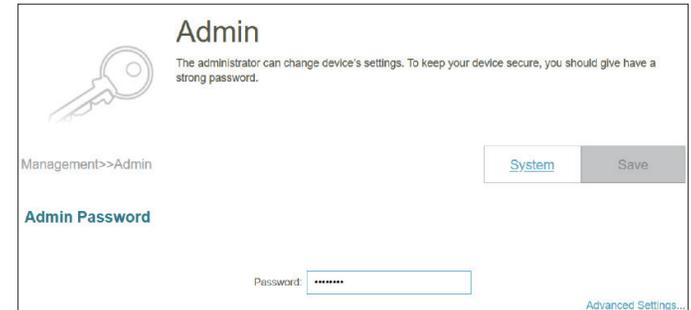

System

This page provides options to back up the current configuration, restore settings from a saved backup file, perform a factory reset, and configure a reboot schedule. On the **System Admin** page, click **System**. Click **Save** at any time to save the changes you have made on this page.

System

Save Settings To Local Hard Drive: Click **Save** to download a backup file (bin type) of your current configuration settings to your local hard drive. This backup can later be used to restore your settings.

Load Settings From Local Hard Drive: Click **Select File** to load a previously saved router configuration file. This will overwrite the router's current configuration.

Restore To Factory Default Settings: Click **Restore** to restore all configuration settings back to the settings that were in effect at the time the router was shipped from the factory. Any settings that have not been saved will be lost, including rules that you have created.

Auto Reboot Configuration

Reboot the Device: Click **Reboot** to reboot the router immediately.

Auto Reboot: Use the drop-down menu to select a schedule for the device to automatically reboot. The schedule may be set to **Never**, **Daily**, or **Weekly**. You can specify the day of the week and the time (hour and minute) for the automatic reboot.

The screenshot shows the 'System' configuration page. At the top, there is a gear icon and the title 'System'. Below the title, a brief description states: 'This page lets you save your router's current settings to a file, restore your settings from a file, restore your router to factory default settings, or reboot the device. Please note that restoring the settings to the factory defaults will erase all settings, including any rules you have created.' Below this, there are two buttons: 'Admin' and 'Save'. The 'System' section contains three buttons: 'Save' (for 'Save Settings To Local Hard Drive'), 'Select File' (for 'Load Settings From Local Hard Drive'), and 'Restore' (for 'Restore To Factory Default Settings'). The 'Auto Reboot Configuration' section contains a 'Reboot' button (for 'Reboot The Device') and a dropdown menu (for 'Auto Reboot') currently set to 'Never'.

This is a close-up of the 'Auto Reboot Configuration' section. It shows the 'Reboot The Device:' label with a 'Reboot' button next to it. Below that, the 'Auto Reboot:' label is followed by a dropdown menu showing 'Never' as the selected option.

Upgrade

This page allows you to upgrade the F530's firmware, either automatically or manually. To manually upgrade the firmware, you must first download the latest firmware file from <http://support.dlink.com>.

In the **Management** tab on the left side of the page, click **Upgrade**. Click **Save** at any time to save the changes you have made on this page.

Firmware Information

Firmware Version: Displays the current firmware version of the device.

Check for New Firmware: Click this button to prompt the device to automatically check for a new firmware version. If a newer version is found, click **Upgrade Firmware** to download and install the new firmware.

Automatic Firmware Upgrade

Automatic Upgrade: If enabled, the device will automatically upgrade to the newest firmware. The system will automatically upgrade to the latest firmware every day at 3:30-4:00 AM.

Choose Upgrade Time: Enable this function to set the device's automatic firmware upgrade at a set time every day.

Upgrade Time: Configurable if **Choose Upgrade Time** is enabled. Set the hour and minute to automatically upgrade the device.

Advanced Settings... Upgrade Manually

Select File: Click the **Select File** button and browse your computer to locate the firmware file you want to install. With the file selected, click **Upload** to begin the upgrade process.

Upgrade

Your device can automatically detect firmware updates, but requires your authorization to install them. You can also check for new firmware manually, and upgrade it from a local file. Firmware may use code that is subject to the GPL licenses. For more information, visit <http://tsd.dlink.com.tw/GPL.asp>.

Management >> Upgrade Save

Firmware

Current Firmware Version: 1.00.10 Check for New Firmware

Automatic Firmware Upgrade

Automatic Upgrade: Disabled Update my device automatically to always enjoy the latest improvements and features.

Upgrade Manually

Upgrade Firmware: Select File

Join N' Share App Setup

The Join N' Share App allows you to access your shared files in a breeze. Connect your mobile device to the device's network before proceeding.

Notes: *The screenshots may be different depending on your mobile device's OS version or platform.*

Step 1

Search and install the free **Join N' Share** App available on the App Store or on Google Play.



Step 2

Launch the Join N' Share App from the Home screen of your mobile device.

Step 3


The designated device has been found. Click **Access**.



When your browser displays a security warning stating, "Your connection isn't private." You will also see Not Secure in the address bar, along with HTTPS crossed out with red lines. This is because the device's default management URL is not an actual Internet website with valid certificates. You can proceed with the setup by following these steps:


1. Click the "Advanced" button.
2. Click the "Proceed to 192.168.125.1" link.

Now you will be able to log in to your device.

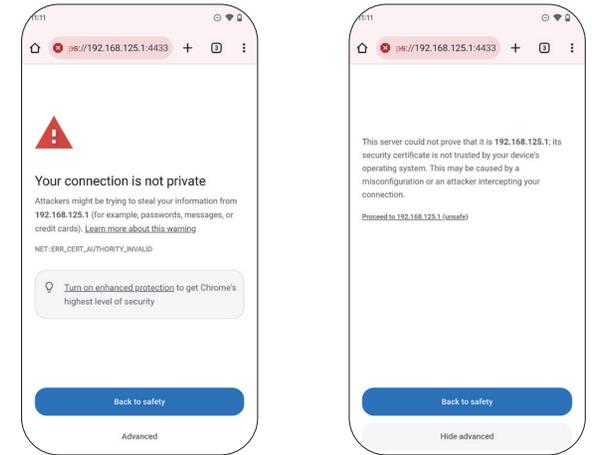

Step 4


Sign in on the app using the device's admin password.

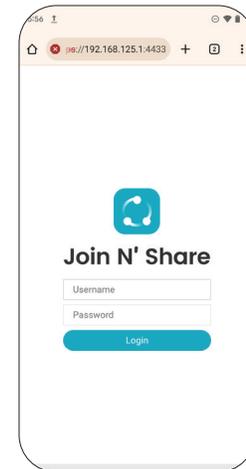

Easy File Management & Seamless Sharing

You can now access and share files both locally through the app and remotely via a browser. Create, edit, and upload files from any device with robust security and precise access control.

Refer to **Join N' Share** on **page 42** for detailed feature explanation and operation instructions.

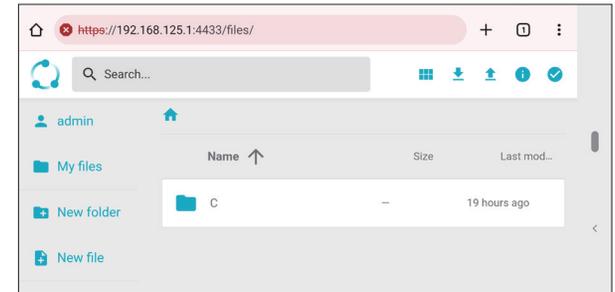

LCD Touch Panel

The LCD Touch Panel on the top of the device is designed to ease management effort and for one-touch Wi-Fi connection. It allows you to share the Wi-Fi connection via a QR code right from the device top.

With the D-Link FALCON App on your smart devices, you can get the F530 up and running quickly. Just plug in the device, open the App and build your home network by following the easy instructions on the screen. The new D-Link FALCON App is especially designed to ease your management work with the following features:

Viewing Connection Status


The Home screen of the LCD display shows the essential cellular connectivity and Wi-Fi networks. In particular, the following information is shown: cellular signal strength and technology used for mobile communication.

Cellular Signal Strength: The number of bars indicates how strong the cellular signal is.

Mobile Carrier: The carrier of the mobile service.

Time: The current time according to the configured time zone.

Battery: The percentage shows the remaining battery level.

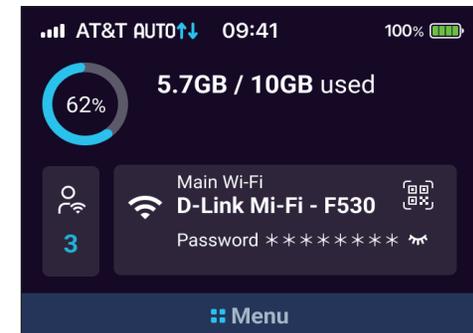


Viewing Storage Capacity

The Home screen of the LCD display also shows the remaining storage space of the total available space of the installed microSD card.

Sharing Wi-Fi Network


- Main Wi-Fi:** The SSID of the Main Wi-Fi network. Tap QR-Code to display the code for scanning to join the Wi-Fi network. Tap the eye sign to reveal the password.
- Guest Wi-Fi:** The SSID of the Guest Wi-Fi network. Tap QR-Code to display the code for scanning to join the Wi-Fi network. Tap the eye sign to reveal the password.

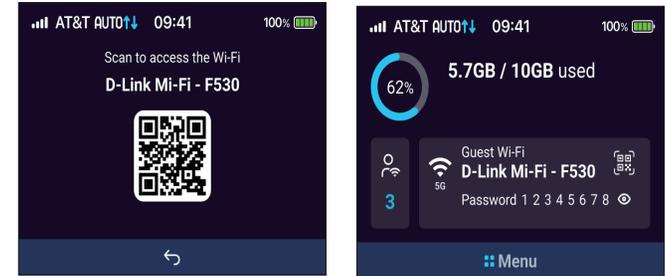

Menus

Tap Menu at the bottom of the screen to access the following configuration settings:


- Power Mode:** The power mode helps reduce power consumption and extend the battery life.
- Wi-Fi:** The current Wi-Fi settings of the main and guest wireless network.
- Mobile Settings:** The current mobile network settings.
- Firmware Upgrade:** The current firmware version.
- System:** System maintenance functions.

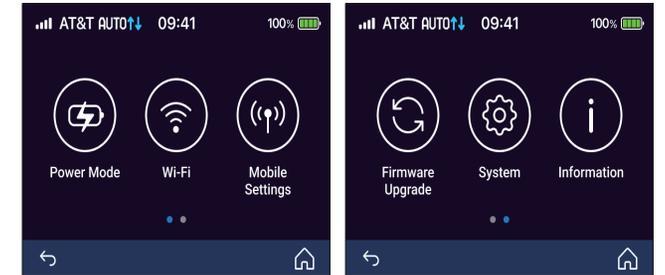

- Information:** The WAN connection status and related information:
- WAN Status:** Whether the WAN is connected or disconnected.
 - IP Address:** The IP Address of the WAN interface.
 - MAC Address:** The MAC address of the WAN interface.
 - IMEI:** The IMEI (International Mobile Equipment Identity) number. It is a unique number for identifying every mobile device on a cellular network, such as smart phones and tablets.


Adjusting the Power Mode

- Balance Mode (Default):** Automatically balances Wi-Fi performance and battery life. In addition, the screen will turn off to conserve energy when the hotspot is idle. The hotspot will wait 60 seconds before turning the screen off when you're not using it.
- Performance Mode:** Prioritizes Wi-Fi performance over battery life. In addition, the screen will turn off to conserve energy when the hotspot is idle. The hotspot will wait 120 seconds before turning the screen off when you're not using it.
- Battery Life:** Maximizes battery life at the expense of Wi-Fi performance. In addition, the screen will turn off to conserve energy when the hotspot is idle. The hotspot will wait 30 seconds before turning the screen off when you're not using it.

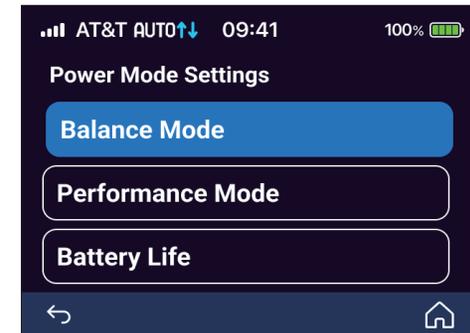

Adjusting the Wi-Fi Setting


- Smart Connection:** Enable or disable the smart connection function. When the smart connection is enabled, your device can connect automatically to the hotspot using the best available Wi-Fi band.
- Main Wi-Fi:** Enable or disable the Main Wi-Fi network.
- Guest Wi-Fi:** Enable or disable the Guest Wi-Fi network.
- WPS:** Tap to start the Wi-Fi Protected Setup (WPS) process. After the WPS process is initialized, press the WPS button on the Wi-Fi client within 120 seconds to connect to the hotspot using the default WPA2 encryption.

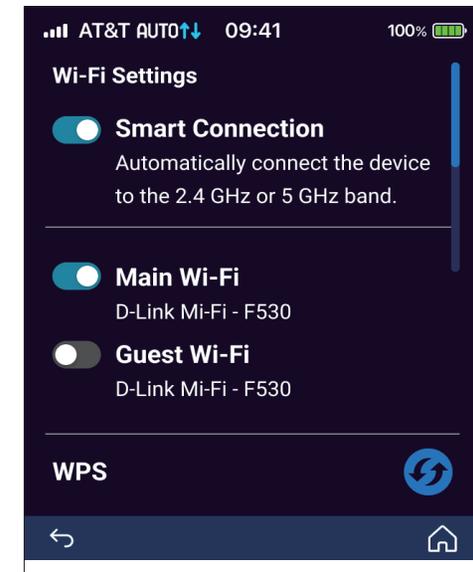

Adjusting the Mobile Settings


Mobile Settings consist of the following settings of your mobile connection:

- Network Type:** Select the technology used for mobile connection: Auto, 5G only, or LTE only.
- ISP:** Enable or disable the data roaming function. Additional costs may incur depending on your service plan.
- SIM Lock:** Display the current SIM card lock mode: enabled or disabled. If it is enabled, you will need to enter the correct PIN to connect to the mobile network.

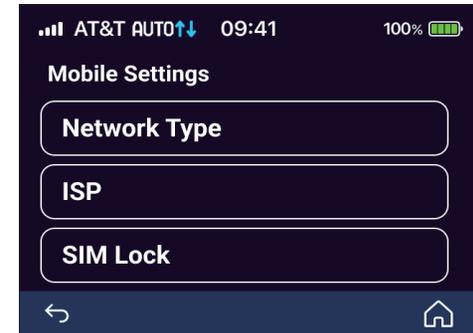


Adjusting the Firmware Upgrade Mode

- Automatic Firmware Upgrade:** Turn on or off the automatic firmware upgrade function.

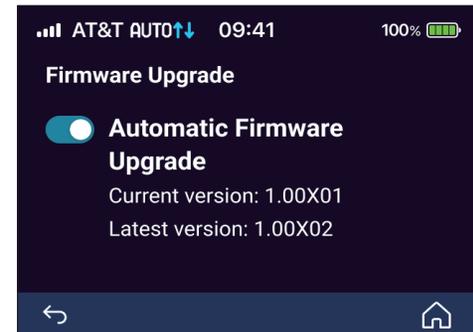

Performing System Maintenance Operations

- Reboot:** Restart the hotspot.
- Reset:** Reset the hotspot to its factory default settings.
- Language:** Configure the language setting of the LCD.

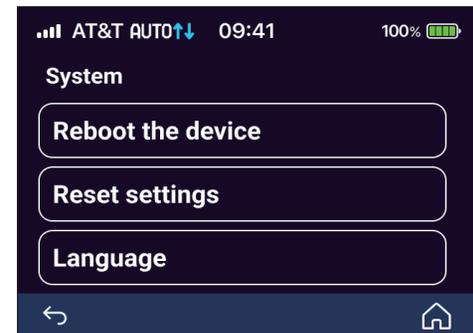

D-Link FALCON

With the D-Link FALCON App on your smart devices, you can get the F530 up and running quickly. Just plug in the device, open the App and build your home network by following the easy instructions on the screen. The new D-Link FALCON App is especially designed to ease your management work with the following features:

Power Mode: The power mode allows you to choose the energy-saving strategy to optimize energy use for longer-lasting performance and extended battery life.

Mobile Data Usage Monitoring: The mobile data usage displays the cumulative mobile data usage up to the current day of the billing cycle.

Join N' Share: The dedicated file sharing application makes file sharing easy, safe, and controlled.

Power Mode Settings


You can directly access the Power Mode at the Home screen. Power Mode helps extend battery life by adjusting power consumption according to your usage and priorities.

Select one of the following three power modes:

Battery Life: Maximizes battery life at the expense of Wi-Fi performance. In this mode, the hotspot automatically switches off the LCD touch panel after 30 seconds of inactivity.

Balance Mode (Default): Automatically balances Wi-Fi performance and battery life. In this mode, the hotspot automatically switches off the LCD touch panel after 60 seconds of inactivity.

Performance Mode: Prioritizes Wi-Fi performance over battery life. In this mode, the hotspot automatically switches off the LCD touch panel after 120 seconds of inactivity.

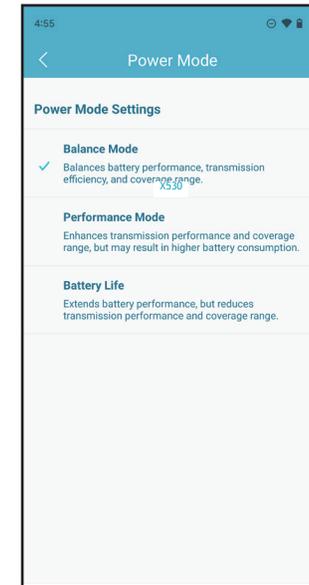

Mobile Data Usage Monitoring

The Mobile Data Usage page provides a detailed report of your mobile data consumption for the current billing month. You can also set a usage threshold to receive SMS notifications when it's reached, helping you control usage and prevent additional charges.

From the Home screen, tap the hotspot, then scroll down **Internet Settings** and tap Mobile Data Usage. You can configure the following settings related to mobile data usage:


Data Cap Amount: Specify the maximum allowed monthly data usage.

Data Cap Warning Ratio: Set the percentage of the data consumption at which an SMS notification will be sent.

Usage Cycle Reset Date: Define the day of the month when the usage counter resets.

Send SMS to Me: Enable this option to receive SMS notifications automatically when the usage approaches the set threshold.

Phone Number: If the above SMS notification is enabled, enter the phone number of the recipient.

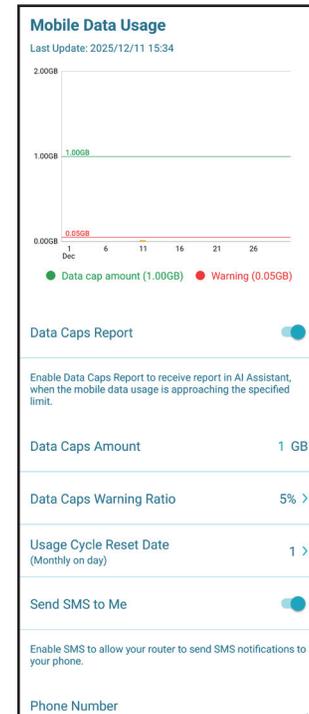

Join N' Share

From the Home screen, tap **File Sharing**. You can configure the following settings to manage access to the file sharing website:

File Sharing: Enable or disable file sharing.


Login Account/Password: Displays the administrator account used to log in to the file sharing website. This account has full administrative privileges and can be used to create additional user accounts with limited access rights. The page also shows the web address and port number for accessing the site within the LAN. You can customize the port number.

Launch Join N' Share: Provides a shortcut link to the Join N' Share App. The App must be installed (refer to **Join N' Share App Setup** on **page 62**) and the device must be connected to the F530's network before use.

Remote Access Settings:

Remote Access Port: Specify the public access port for the file sharing website. You can modify it.

Remote Access Link: Displays the web address for accessing the file sharing website remotely via the Internet.

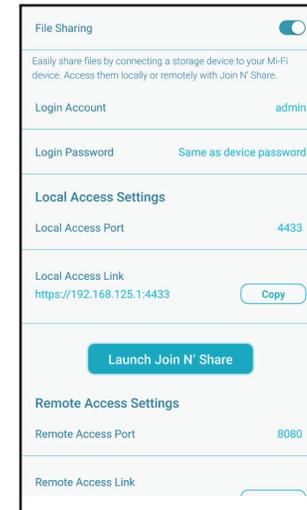

Wi-Fi Settings

From the Home screen, tap **Wi-Fi**, and tap the gear icon. Here you can configure Wi-Fi settings for **Main** and **Guest** wireless networks. Each zone can be customized to control accessibility based on your needs.

Main Wi-Fi: The primary Wi-Fi used by trusted devices such as computers, NAS, mobile devices for works and leisure.

Guest Wi-Fi: A separate network designated for devices that need Internet connections without access to internal resources. To restrict guest devices to Internet access only, toggle the Internet Access Only option.

Share Wi-Fi: Tap this button to send a copy of the Wi-Fi setting with the configured password using one of the instant messaging or cloud services installed on your phone with other devices.

Smart Connection: Enable this feature to allow client devices to connect automatically to 2.4 GHz or 5 GHz band depending on the supported frequency. Disable this feature to configure each band separately.


Wi-Fi Name: The name of the wireless network that appears on the Wi-Fi scan list.

Password: Enter the password or network key for connecting with the Wi-Fi network.

Security: Select the security standard: WPA3, WPA2/WPA3, WPA2, or legacy WPA/WPA2. It is recommended that you use the strongest security protocol – WPA3.

Wi-Fi Schedule: Select the time during which the wireless network will be available. To set a schedule, tap a cell to choose the start time, then drag to set the end time. Long-press a cell to adjust the time period in precise 5-minute increments.

After changing the configurations on this page, click **Save** at the top right.

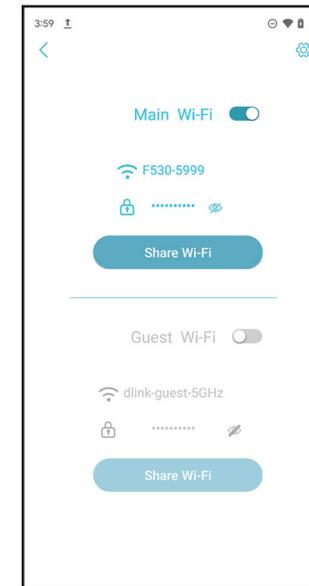

Other Features

Advanced Mode

The advanced mode provides links to the web management interface of the device. To access, tap the **Advanced Mode** button at the bottom of the screen from **Home**. Note it only works when your mobile device connects to the F530's network.

Device Information and Settings

From **Home**, tap the device icon to view its information and settings: device name (modifiable), IP and MAC address, hardware and firmware version (configuration with automatic update), time zone (modifiable), and model number. You can also view and configure the Internet connection method (under **Settings** > **Internet Settings**) with the following options:

APN Settings: Shows the APN configuration method. If manual APN is selected, configure the following:

APN Name: Enter the Access Point Name

Username: Enter the user name required to connect to the mobile network.

Password: Enter password required to connect to the mobile network.

Dial Number: Enter the number to dial to the network.



Authentication: Select the method for authenticating the mobile connection.

APN IP Type: Select the mobile network's IP addressing mechanism.

Cellular Connection: Select the preferred service mode (Auto, 5G NR NSA, 5G NR SA, or LTE) and data roaming on/off.

SIM Protection: lock the SIM with a PIN. Enable this to prevent cellular connection without entering a PIN.

You can also change the device password and perform device maintenance functions such as **Restart the Device**, **Reset to Factory Default** and **Change Device Password** on this page.

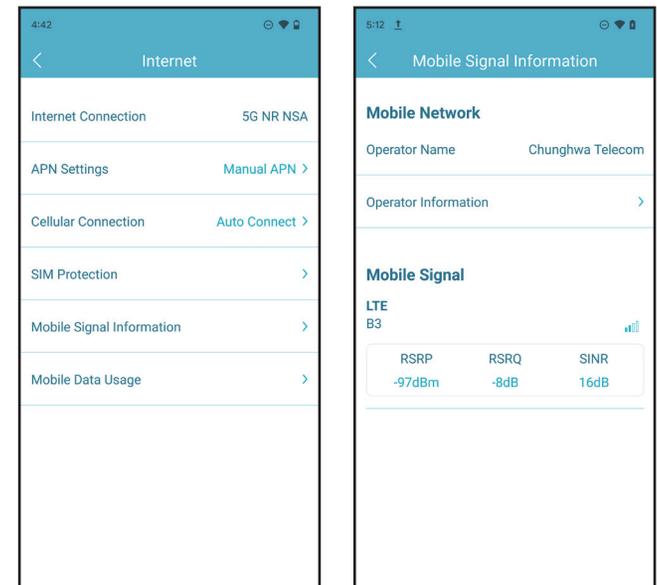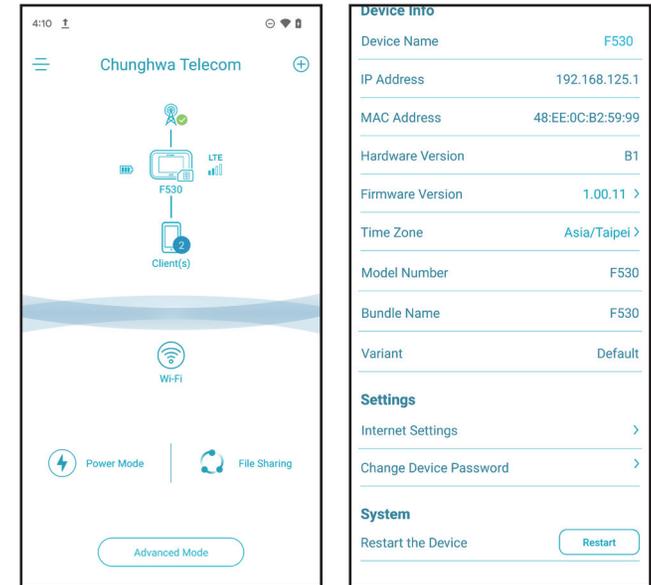

Mobile Signal Information: Displays the mobile network operator and related signal strength metrics:


RSRP: Reference Signal Received Power, which measures the power level in the LTE cell network. A value ≥ -80 indicates excellent quality.

RSRQ: Reference Signal Received Quality (RSRQ), which measures the quality of the received reference signal and is helpful in determining the amount of interference. A value ≥ -10 indicates excellent quality.

SINR: Signal-to-interference-plus-noise ratio, which measures the quality of wireless signal by taking account of noise and other interfering factors. A value ≥ 20 indicates excellent quality.

Client Information and Statistics

From **Home**, tap the device (**Clients**) to view clients currently online. Tap a device to view its information, including the device name, IP address (DHCP or reserved), and MAC address.

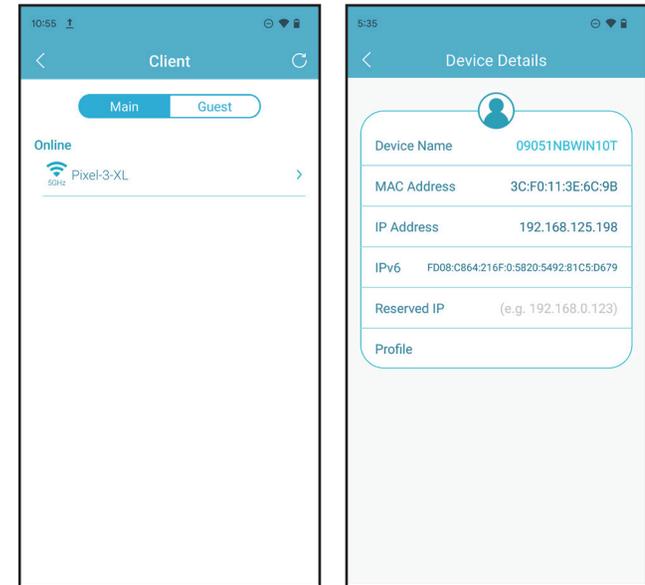


Battery Removal

Important:


1. Risk of explosion if the battery is damaged or exposed to fire.
2. Discarded batteries should be insulated and handed to licensed recycling agents.

Remove the Battery


1. Remove the device cover by gently prying it up from the case using the side notch.

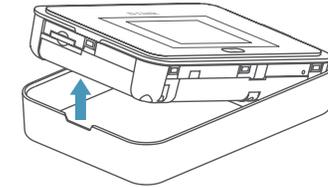

2. Use the notch on the battery socket to gently lift and remove the battery.

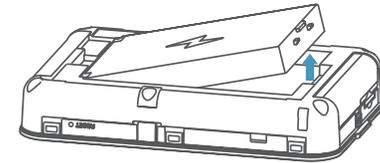

3. Close the back cover.

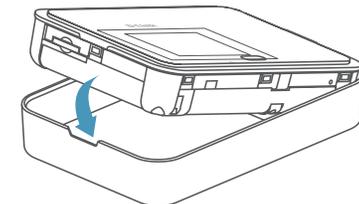

Note: Always unplug and turn off the device before removing the battery. Never insert or remove the battery while the device is in use.

Troubleshooting

This chapter provides solutions to problems that can occur during the installation and operation of the device. Read the following descriptions if you are having any problems.

1. Why can't I access the web-based configuration utility?

When entering the IP address of the D-Link device (**192.168.125.1** for example), you are not connecting to a website, nor do you have to be connected to the Internet. The device has the utility built-in to a ROM chip in the device itself. Your computer must be on the same IP subnet to connect to the web-based utility.

- Make sure you have an updated Java-enabled web browser. We recommend the following:
 - Mozilla Firefox 28 or higher
 - Google™ Chrome 28 or higher
 - Apple Safari 6 or higher
- Verify physical connectivity by checking for solid link lights on the device. If you do not get a solid link light, try using a different cable, or connect to a different port on the device if possible. If the computer is turned off, the link light may not be on.
- Disable any Internet security software running on the computer. Software firewalls such as ZoneAlarm, BlackICE, Sygate and Norton Personal Firewall may block access to the configuration pages. Check the help files included with your firewall software for more information on how to disable or configure it.

- Access the web management. Open your web browser and enter the IP address of your D-Link device in the address bar. This should open the login page for your web management.
- If you still cannot access the configuration, unplug the power to the device for 10 seconds and plug back in. Wait for about 30 seconds and try to access the configuration. If you have multiple computers, try connecting using a different computer.

2. What can I do if I forgot my password?

If you forgot your password, you must reset your device. This process will change all your settings back to the factory defaults.

To reset the device, locate the reset button (Refer to **Hardware Setup** on page **9**). With the device powered on, use a paperclip to hold the recessed button down for about 5 seconds. Release the button and the device will go through its reboot process. Wait for about 30 seconds to access the device. The default IP address is **192.168.125.1**. When logging in, use the default admin password printed on the product label.

Wireless Basics

Based on industry standards, D-Link wireless products provide easy-to-use and compatibly high-speed wireless connectivity within your home, business, or public accessible wireless networks. Strictly adhering to the IEEE standard, the D-Link wireless products family will allow you to access the data you want, when, and where you want it. You will be able to enjoy the freedom that wireless networking delivers.

A wireless local area network (WLAN) is a cellular computer network that transmits and receives data with radio signals instead of through wires. Wireless LANs are used increasingly in both home and office environments, and at public areas such as airports, coffee shops, and universities. Innovative ways to utilize WLAN technology is helping people work and communicate more efficiently. Increased mobility and the absence of cabling and other fixed infrastructure have proven to be beneficial for many users.

Wireless users can use the same applications they use on a wired network. Wireless adapter cards used on laptop and desktop systems support the same protocols as Ethernet adapter cards do.

Under many circumstances, it may be desirable for mobile network devices to link to a conventional Ethernet LAN in order to use servers, printers or an Internet connection supplied through the wired LAN. A wireless router is a device used to provide this link.

What is Wireless?

Wireless or Wi-Fi technology is another way of connecting your computer to the network without using wires. Wi-Fi uses radio frequency to connect wirelessly so you have the freedom to connect computers anywhere in your home or office network.

Why D-Link Wireless?

D-Link is a worldwide leader and also award-winning designer, developer, and manufacturer of networking products. We deliver the performance you need at an affordable price, and offer all the products you need to build your network.

How does wireless technology work?

Wireless technology works just as how cordless phones work: through radio signals, data is transmitted from one point A to point B. But there are restrictions for wireless technology: how you can access the network. You must be within the range of a wireless network area to be able to connect your computer. There are, basically, two different types of wireless networks: Wireless Local Area Network (WLAN), and Wireless Personal Area Network (WPAN).

Wireless Local Area Network (WLAN)

In a wireless local area network, a device called an Access Point (AP) connects computers to the network. The access point has a small antenna attached to it, which allows it to transmit data back and forth over radio signals. With an indoor access point, the signal can travel up to 300 feet away. With an outdoor access point, the signal can reach out up to 30 miles to serve places like manufacturing plants, industrial locations, university and high school campuses, airports, golf courses, and many other outdoor venues.

Wireless Personal Area Network (WPAN)

Bluetooth is the industry standard wireless technology used for WPAN. Bluetooth devices in WPAN operate in a range up to 30 feet away.

Compared to WLAN, both the speed and wireless operation range of WPAN are less than those of WLAN, and WPAN in turn does not consume as much power as WLAN does. This makes it ideal for personal devices, such as mobile phones, PDAs, headphones, laptops, speakers, and other devices that operate on batteries.

Who uses wireless?

In recent years, wireless technology has become so popular that almost everyone is using it, and whether it's for homes, offices, businesses, D-Link has a wireless solution to offer.

Home uses/benefits

- Gives everyone at home broadband access
- Web surfing, email and instant message checking, etc.
- Gets rid of the cables around your house
- Simple and easy to use

Small office and home office uses/benefits

- Stay on top of everything at home as you would at office
- Remotely access your office network from home
- Share Internet connection and printer with multiple computers
- No need to dedicate office space

Tips

When you configure a wireless network, here are a few things to keep in mind:

Centralize your router or access point

Make sure you place a router/access point at a centralized location within your network for the best performance. Try to place the router/access point as high as possible in the room, so the signal gets dispersed throughout your home. If you have a two-story home, you may need a repeater to boost the signal and extend the coverage range.

Eliminate Interference

Place home appliances such as cordless telephones, microwaves, and televisions as far away as possible from the router/access point. This would significantly reduce any interference that the appliances might cause since they may operate on the same frequency.

Another way to reduce wireless resource contention is to separate the use of radio frequency and channel by allocating devices accordingly. Advanced Wi-Fi devices supporting the 5 GHz band should use this band instead of 2.4GHz, which can be used to accommodate legacy devices and Bluetooth. Enable **Smart Connect** that manages band selection automatically when connecting to devices. The same principle applies to automatic channel selection. This option enables the system to select the cleanest channel for your network.

Wireless Encryption

Don't let your next-door neighbors or intruders connect to your wireless network. Encrypt your wireless network by turning on the router's latest WPA3 security feature. Refer to the product manual for detailed information on how to set it up.

Wireless Security

This section introduces different encryption levels and types you can use to better protect your data from intruders. The device offers some of the following types of security protocols:

- WPA3-SAE (Wi-Fi Protected Access 3-Simultaneous Authentication of Equals)
- WPA2-PSK (Wi-Fi Protected Access 2-Pre-Shared Key)
- WPA-PSK (Wi-Fi Protected Access-Pre-Shared Key)

What is WPA?

Wi-Fi Protected Access (WPA), is a Wi-Fi standard that was designed to improve the security features of Wired Equivalent Privacy (WEP).

The 2 major improvements over WEP:

- Improved data encryption through the Temporal Key Integrity Protocol (TKIP). TKIP scrambles keys using a hashing algorithm and by adding an integrity-checking feature to ensure that the keys have not been tampered. WPA2 is based on 802.11i and uses Advanced Encryption Standard (AES) instead of TKIP.
- User authentication through the Extensible Authentication Protocol (EAP), which is generally missing in WEP. WEP regulates access to a wireless network based on a computer's hardware-specific MAC address, which is relatively simple to be sniffed out and stolen. EAP is built on a more secure public-key encryption system to ensure that only authorized network users can access the network.

WPA-PSK/WPA2-PSK/WPA3-SAE uses a passphrase or key to authenticate your wireless connection. The key is an alpha-numeric password between 8 and 63 characters long. The password can include symbols (!?*&_) and spaces. This key must be the exact same key entered on your wireless router or access point.

WPA/WPA2 incorporates user authentication through the Extensible Authentication Protocol (EAP). EAP is built on a more secure public key encryption system to ensure that only authorized network users can access the network.

WPA3 has the strongest encryption among these with an increased cryptographic capability and the requirements of the Protected Management Frames (PMFs) to facilitate protection from snooping attack.

Technical Specifications

Device Interfaces

- 1 x Nano SIM card slot (4FF)
- 1 x microSD card Slot
- 1 x USB 3.0 Type-C
- 1 x Power button
- 1 x Reset button

Wi-Fi Access Point^{2,3}

- IEEE 802.11ax/ac/n/a (5 GHz)
- IEEE 802.11ax/n/g/b (2.4 GHz)

Mobile Data Rate^{1,2}

- NR NSA Mode:
 - Downlink: 5.67 Gbps
 - Uplink: 1.46 Gbps
- NR SA Mode:
 - Downlink: 7.01 Gbps
 - Uplink: 2.5 Gbps
- LTE Mode:
 - Downlink: 1.6 Gbps
 - Uplink: 211 Mbps

Wi-Fi Data Rate¹

- 3000 Mbps (5 GHz up to 2402 Mbps / 2.4 GHz up to 574 Mbps)

Antenna

- 4 x cellular internal antennas
- 2 x Wi-Fi 2.4/5 GHz internal antennas

LCD

- 2.4" LCD touch panel

Wireless Encryption

- WPA Personal
- WPA2 Personal
- WPA3 Personal
- None

Dimensions (L x W x H)

- 116 x 81 x 23.5 mm (4.57 x 3.19 x 0.93 in)

Battery Capacity

5260 mAh

Weight

- 260 g (9.2 oz)

Operating Temperature

- 0 to 40 °C (32 to 104 °F)

Storage Temperature

- -10 to 60° C (14 to 140° F)

¹ The maximum data rates mentioned are theoretical values. Actual performance may vary due to settings, cabling, temperature, network configuration, interface, device compatibility, environmental and on-site conditions, and other similar factors. References to power capability, signal or processing speed, signal range or distance, data encryption, storage capacity, display properties, or other performance metrics are based on optimal conditions derived from industry standards and provided for informational purposes only.

² Supported frequency bands are dependent on regional variants and may not be available in all markets.

³ The router does not include 5.25-5.35 GHz & 5.47-5.725 GHz in some regions.

⁴ Specifications may be subject to changes without prior notice.

Regulatory Information

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Operations in the 5.15-5.25 GHz band are restricted to indoor usage only. This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

IMPORTANT NOTICE:

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Note

The country code selection is for non-USA models only and is not available to all USA models. Per FCC regulations, all WiFi product marketed in the USA must be fixed to USA operational channels only.

Innovation, Science and Economic Development Canada (ISED) Statement:

This device complies with ISED licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution :

- (i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- (iii) the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and
- (iv) the worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in Section 6.2.2(3) shall be clearly indicated.
- (v) Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Avvertissement:

- Le guide d'utilisation des dispositifs pour réseaux locaux doit inclure des instructions précises sur les restrictions susmentionnées, notamment :
- (i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
 - (ii) le gain maximal d'antenne permis pour les dispositifs utilisant les bandes de 5250 à 5350 MHz et de 5470 à 5725 MHz doit être conforme à la limite de la p.i.r.e.;
 - (iii) le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5725 à 5850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée pour l'exploitation point à point et l'exploitation non point à point, selon le cas;
 - (iv) les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque d'élévation, et énoncée à la section 6.2.2 3), doivent être clairement indiqués.
 - (v) De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Radiation Exposure Statement

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

Déclaration d'exposition aux radiations

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.



Wi-Fi	Frequency Band(s) Frequenzband Fréquence bande(s) Bandas de Frecuencia Frequenza/e Frequentie(s)	Max. Output Power (EIRP) Max. Output Power Consommation d'énergie max. Potencia máxima de Salida Potenza max. Output Max. Output Power
5 G	5.15 – 5.25 GHz	20 mW
	5.25 – 5.35 GHz	20 mW
	5.47 – 5.725 GHz	20 mW
2.4 G	2.4 – 2.4835 GHz	50 mW

WWAN	Technology Technologie Technologie Tecnología Tecnologia	Max. Output Power (EIRP) Consommation d'énergie max. Potencia máxima de Salida Potenza max. Output Max. Output Power
WCDMA I	RMC12.2K	20.39 dBm
	HSDPA DC-HSDPA	20.39 dBm
	HSUPA HSPA+	20.39 dBm

WCDMA V	RMC12.2K	24.00 dBm
	HSDPA DC-HSDPA	24.00 dBm
	HSUPA HSPA+	24.00 dBm
WCDMA VIII	RMC12.2K	24.00 dBm
	HSDPA DC-HSDPA	24.00 dBm
	HSUPA HSPA+	24.00 dBm
LTE 1	FDD	20.25 dBm
LTE 3	FDD	21.13 dBm
LTE 5	FDD	24.00 dBm
LTE 7	FDD	20.22 dBm
LTE 8	FDD	24.00 dBm
LTE 20	FDD	23.00 dBm
LTE 28	FDD	24.00 dBm
LTE 38	FDD	23.00 dBm
LTE 40	FDD	23.00 dBm
LTE 41_PC3	TDD	23.00 dBm
LTE 41_PC2	TDD	26.00 dBm

LTE 42	TDD	23.00 dBm
LTE 43	TDD	23.00 dBm
5G NR n1	FDD	22.00 dBm
5G NR n3	FDD	20.21 dBm
5G NR n5	FDD	23.00 dBm
5G NR n7	FDD	21.00 dBm
5G NR n8	FDD	23.00 dBm
5G NR n20	FDD	23.00 dBm
5G NR n28	FDD	23.00 dBm
5G NR n38	TDD	21.00 dBm
5G NR n40	TDD	25.00 dBm
5G NR n41_PC2	TDD	25.79 dBm
5G NR n77_PC2	TDD	24.44 dBm
5G NR n78_PC2	TDD	24.46 dBm

European Community Declaration of Conformity:

Česky [Czech]	Tímto D-Link Corporation prohlašuje, že tento produkt, jeho příslušenství a software jsou v souladu se směrnicí 2014/53/EU. Celý text ES prohlášení o shodě vydaného EU a o firmwaru produktu lze stáhnout na stránkách k produktu www.dlink.com .
Dansk [Danish]	D-Link Corporation erklærer herved, at dette produkt, tilbehør og software er i overensstemmelse med direktiv 2014/53/EU. Den fulde tekst i EU-overensstemmelseserklæringen og produktfirmware kan wnloades fra produktsiden hos www.dlink.com .
Deutsch [German]	Hiermit erklärt die D-Link Corporation, dass dieses Produkt, das Zubehör und die Software der Richtlinie 2014/53/EU entsprechen. Der vollständige Text der Konformitätserklärung der Europäischen Gemeinschaft sowie die Firmware zum Produkt stehen Ihnen zum Herunterladen von der Produktseite im Internet auf www.dlink.com zur Verfügung.
Eesti [Estonian]	Käesolevaga kinnitab D-Link Corporation, et see toode, tarvikud ja tarkvara on kooskõlas direktiiviga 2014/53/EL. Euroopa Liidu vastavusdeklaratsiooni täistekst ja toote püsivara on allalaadimiseks saadaval tootelehel www.dlink.com .
English	Hereby, D-Link Corporation, declares that this product, accessories, and software are in compliance with directive 2014/53/EU. The full text of the EU Declaration of Conformity and product firmware are available for download from the product page at www.dlink.com
Español [Spanish]	Por la presente, D-Link Corporation declara que este producto, accesorios y software cumplen con las directivas 2014/53/UE. El texto completo de la declaración de conformidad de la UE y el firmware del producto están disponibles y se pueden descargar desde la página del producto en www.dlink.com .
Ελληνική [Greek]	Με την παρούσα, η D-Link Corporation δηλώνει ότι αυτό το προϊόν, τα αξεσουάρ και το λογισμικό συμμορφώνονται με την Οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης της ΕΕ και το υλικολογισμικό του προϊόντος είναι διαθέσιμα για λήψη από τη σελίδα του προϊόντος στην τοποθεσία www.dlink.com .
Français [French]	Par les présentes, D-Link Corporation déclare que ce produit, ces accessoires et ce logiciel sont conformes aux directives 2014/53/UE. Le texte complet de la déclaration de conformité de l'UE et le microprogramme du produit sont disponibles au téléchargement sur la page des produits à www.dlink.com .
Italiano [Italian]	Con la presente, D-Link Corporation dichiara che questo prodotto, i relativi accessori e il software sono conformi alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE e il firmware del prodotto sono disponibili per il download dalla pagina del prodotto su www.dlink.com .

Latviski [Latvian]	Ar šo uzņēmums D-Link Corporation apliecina, ka šis produkts, piederumi un programmatūra atbilst direktīvai 2014/53/ES. ES atbilstības deklarācijas pilno tekstu un produkta aparātprogrammatūru var lejupielādēt attiecīgā produkta lapā vietnē www.dlink.com .
Lietuvių [Lithuanian]	Šiuo dokumentu „D-Link Corporation“ pareiškia, kad šis gaminys, priedai ir programinė įranga atitinka direktyvą 2014/53/ES. Visą ES atitikties deklaracijos tekstą ir gaminio programinę aparatinę įrangą galima atsisiųsti iš gaminio puslapio adresu www.dlink.com .
Nederlands [Dutch]	Hierbij verklaart D-Link Corporation dat dit product, accessoires en software voldoen aan de richtlijnen 2014/53/EU. De volledige tekst van de EU conformiteitsverklaring en productfirmware is beschikbaar voor download van de productpagina op www.dlink.com .
Malti [Maltese]	Bil-preżenti, D-Link Corporation tiddikjara li dan il-prodott, l-aċċessorji, u s-software huma konformi mad-Direttiva 2014/53/UE. Tista' tnizzel it-test s'hiñ tad-dikjarazzjoni ta' konformità tal-UE u l-firmware tal-prodott mill-paġna tal-prodott fuq www.dlink.com .
Magyar [Hungarian]	Ezennel a D-Link Corporation kijelenti, hogy a jelen termék, annak tartozékai és szoftvere megfelelnek a 2014/53/EU sz. rendeletnek. Az EU Megfelelőségi nyilatkozat teljes szövege és a termék firmware a termék oldaláról tölthető le a www.dlink.com címen.
Polski [Polish]	D-Link Corporation niniejszym oświadcza, że ten produkt, akcesoria oraz oprogramowanie są zgodne z dyrektywami 2014/53/EU. Pełen tekst deklaracji zgodności UE oraz oprogramowanie sprzętowe do produktu można pobrać na stronie produktu w witrynie www.dlink.com .
Português [Portuguese]	Desta forma, a D-Link Corporation declara que este produto, os acessórios e o software estão em conformidade com a diretiva 2014/53/UE. O texto completo da declaração de conformidade da UE e do firmware
Slovensko[Slovenian]	Podjetje D-Link Corporation s tem izjavlja, da so ta izdelki, dodatna oprema in programska oprema skladni z direktivami 2014/53/EU. Celotno besedilo izjave o skladnosti EU in vdelana programska oprema sta na voljo za prenos na strani izdelka na www.dlink.com .
Slovensky [Slovak]	Spoločnosť D-Link týmto vyhlasuje, že tento produkt, príslušenstvo a softvér sú v súlade so smernicou 2014/53/EÚ. Úplné znenie vyhlásenia EÚ o zhode a firmvéri produktu sú k dispozícii na prevzatie zo stránky produktu www.dlink.com .
Suomi [Finnish]	D-Link Corporation täten vakuuttaa, että tämä tuote, lisävarusteet ja ohjelmisto ovat direktiivin 2014/53/EU vaatimusten mukaisia. Täydellinen EU-vaatimustenmukaisuusvakuutus samoin kuin tuotteen laiteohjelmisto ovat ladattavissa osoitteesta www.dlink.com .

Svenska[Swedish]	D-Link Corporation försäkrar härmed att denna produkt, tillbehör och programvara överensstämmer med direktiv 2014/53/EU. Hela texten med EU-försäkran om överensstämmelse och produkt-firmware kan hämtas från produktsidan på www.dlink.com .
Íslenska [Icelandic]	Hér með lýsir D-Link Corporation því yfir að þessi vara, fylgihlutir og hugbúnaður eru í samræmi við tilskipun 2014/53/EB. Sækja má ESB-samræmisýfirlýsinguna í heild sinni og fastbúnað vörunnar af vefsíðu vörunnar á www.dlink.com .
Norsk [Norwegian]	Herved erklærer D-Link Corporation at dette produktet, tilbehøret og programvaren er i samsvar med direktivet 2014/53/EU. Den fullstendige teksten i EU-erklæring om samsvar og produktets fastvare er tilgjengelig for nedlasting fra produktsiden på www.dlink.com .

Warning Statement:

The power outlet should be near the device and easily accessible.

NOTICE OF WIRELESS RADIO LAN USAGE IN THE EUROPEAN COMMUNITY (FOR WIRELESS PRODUCT ONLY):

- This device is restricted to indoor use when operated in the European Community using channels in the 5.15-5.35 GHz band to reduce the potential for interference.
- This device is a 2.4 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries. This equipment may be operated in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, and CY.

Usage Notes:

- To remain in conformance with European National spectrum usage regulations, frequency and channel limitations will be applied on the products according to the country where the equipment will be deployed.
- This device is restricted from functioning in Ad-hoc mode while operating in 5 GHz. Ad-hoc mode is direct peer-to-peer communication between two client devices without an Access Point.
- Access points will support DFS (Dynamic Frequency Selection) and TPC (Transmit Power Control) functionality as required when operating in 5 GHz band within the EU.
- Please refer to the product manual or datasheet to check whether your product uses 2.4 GHz and/or 5 GHz wireless.

HINWEIS ZUR VERWENDUNG VON DRAHTLOS-NETZWERK (WLAN) IN DER EUROPÄISCHEN GEMEINSCHAFT (NUR FÜR EIN DRAHTLOSES PRODUKT)

- Der Betrieb dieses Geräts in der Europäischen Gemeinschaft bei Nutzung von Kanälen im 5,15-5,35 GHz Frequenzband ist ausschließlich auf Innenräume beschränkt, um das Interferenzpotential zu reduzieren.
- Bei diesem Gerät handelt es sich um ein zum Einsatz in allen EU-Mitgliedsstaaten und in EFTA-Ländern - ausgenommen Frankreich. Der Betrieb dieses Geräts ist in den folgenden Ländern erlaubt: AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Gebrauchshinweise:

- Um den in Europa geltenden nationalen Vorschriften zum Nutzen des Funkspektrums weiterhin zu entsprechen, werden Frequenz und Kanalbeschränkungen, dem jeweiligen Land, in dem das Gerät zum Einsatz kommt, entsprechend, auf die Produkte angewandt.
- Die Funktionalität im Ad-hoc-Modus bei Betrieb auf 5 GHz ist für dieses Gerät eingeschränkt. Bei dem Ad-hoc-Modus handelt es sich um eine Peer-to-Peer-Kommunikation zwischen zwei Client-Geräten ohne einen Access Point.
- Access Points unterstützen die Funktionen DFS (Dynamic Frequency Selection) und TPC (Transmit Power Control) wie erforderlich bei Betrieb auf 5 GHz innerhalb der EU.
- Bitte schlagen Sie im Handbuch oder Datenblatt nach, ob Ihr Gerät eine 2,4 GHz und / oder 5 GHz Verbindung nutzt.

AVIS CONCERNANT L'UTILISATION DE LA RADIO SANS FIL LAN DANS LA COMMUNAUTÉ EUROPÉENNE (UNIQUEMENT POUR LES PRODUITS SANS FIL)

- Cet appareil est limité à un usage intérieur lorsqu'il est utilisé dans la Communauté européenne sur les canaux de la bande de 5,15 à 5,35 GHz afin de réduire les risques d'interférences.
- Cet appareil est un système de transmission à large bande (émetteur-récepteur) de 2,4 GHz, destiné à être utilisé dans tous les États-membres de l'UE et les pays de l'AELE. Cet équipement peut être utilisé dans les pays suivants : AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Notes d'utilisation:

- Pour rester en conformité avec la réglementation nationale européenne en matière d'utilisation du spectre, des limites de fréquence et de canal seront appliquées aux produits selon le pays où l'équipement sera déployé.
- Cet appareil ne peut pas utiliser le mode Ad-hoc lorsqu'il fonctionne dans la bande de 5 GHz. Le mode Adhoc fournit une communication directe pair à pair entre deux périphériques clients sans point d'accès.
- Les points d'accès prendront en charge les fonctionnalités DFS (Dynamic Frequency Selection) et TPC (Transmit Power Control) au besoin lors du fonctionnement dans la bande de 5 GHz au sein de l'UE.
- Merci de vous référer au guide d'utilisation ou de la fiche technique afin de vérifier si votre produit utilise 2.4 GHz et/ou 5 GHz sans fil.

AVISO DE USO DE LA LAN DE RADIO INALÁMBRICA EN LA COMUNIDAD EUROPEA (SOLO PARA EL PRODUCTO INALÁMBRICO)

- El uso de este dispositivo está restringido a interiores cuando funciona en la Comunidad Europea utilizando canales en la banda de 5,15-5,35 GHz, para reducir la posibilidad de interferencias.
- Este dispositivo es un sistema de transmisión (transceptor) de banda ancha de 2,4 GHz, pensado para su uso en todos los estados miembros de la UE y en los países de la AELC. Este equipo se puede utilizar en AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Notas de uso:

- Para seguir cumpliendo las normas europeas de uso del espectro nacional, se aplicarán limitaciones de frecuencia y canal en los productos en función del país en el que se pondrá en funcionamiento el equipo.
- Este dispositivo tiene restringido el funcionamiento en modo Ad-hoc mientras funcione a 5 Ghz. El modo Ad-hoc es la comunicación directa de igual a igual entre dos dispositivos cliente sin un punto de acceso.
- Los puntos de acceso admitirán la funcionalidad DFS (Selección de frecuencia dinámica) y TPC (Control de la potencia de transmisión) si es necesario cuando funcionan a 5 Ghz dentro de la UE.
- Por favor compruebe el manual o la ficha de producto para comprobar si el producto utiliza las bandas inalámbricas de 2.4 GHz y/o la de 5 GHz.

AVVISO PER L'USO DI LAN RADIO WIRELESS NELLA COMUNITÀ EUROPEA (SOLO PER PRODOTTI WIRELESS)

- Nella Comunità europea, l'uso di questo dispositivo è limitato esclusivamente agli ambienti interni sui canali compresi nella banda da 5,15 a 5,35 GHz al fine di ridurre potenziali interferenze. Questo dispositivo è un sistema di trasmissione a banda larga a 2,4 GHz (ricetrasmittente), destinato all'uso in tutti gli stati membri dell'Unione europea e nei paesi EFTA.
- Questo dispositivo può essere utilizzato in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Note per l'uso

- Al fine di mantenere la conformità alle normative nazionali europee per l'uso dello spettro di frequenze, saranno applicate limitazioni sulle frequenze e sui canali per il prodotto in conformità alle normative del paese in cui il dispositivo viene utilizzato.
- Questo dispositivo non può essere attivato in modalità Ad-hoc durante il funzionamento a 5 GHz. La modalità Ad-hoc è una comunicazione diretta peer-to-peer fra due dispositivi client senza un punto di accesso.
- I punti di accesso supportano le funzionalità DFS (Dynamic Frequency Selection) e TPC (Transmit Power Control) richieste per operare a 5 GHz nell'Unione europea.
- Ti invitiamo a fare riferimento al manuale del prodotto o alla scheda tecnica per verificare se il tuo prodotto utilizza le frequenze 2,4 GHz e/o 5 GHz.

KENNISGEVING VAN DRAADLOOS RADIO LAN-GEbruik IN DE EUROPESE GEMEENSCHAP (ALLEEN VOOR DRAADLOOS PRODUCT)

- Dit toestel is beperkt tot gebruik binnenshuis wanneer het wordt gebruikt in de Europese Gemeenschap gebruik makend van kanalen in de 5.15-5.35 GHz band om de kans op interferentie te beperken.
- Dit toestel is een 2.4 GHz breedband transmissiesysteem (transceiver) dat bedoeld is voor gebruik in alle EU lidstaten en EFTA landen. Deze uitrusting mag gebruikt worden in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Gebruiksaanwijzingen:

- Om de gebruiksvoorschriften van het Europese Nationale spectrum na te leven, zullen frequentie- en kanaalbeperkingen worden toegepast op de producten volgens het land waar de uitrusting gebruikt zal worden.
- Dit toestel kan niet functioneren in Ad-hoc mode wanneer het gebruikt wordt in 5 GHz. Ad-hoc mode is directe peer-to-peer communicatie tussen twee klantenapparaten zonder een toegangspunt.
- Toegangspunten ondersteunen DFS (Dynamic Frequency Selection) en TPC (Transmit Power Control) functionaliteit zoals vereist bij gebruik in 5 GHz binnen de EU.
- Raadpleeg de handleiding of de datasheet om te controleren of uw product gebruik maakt van 2.4 GHz en/of 5 GHz.

SAFETY INSTRUCTIONS

The following general safety guidelines are provided to help ensure your own personal safety and protect your product from potential damage. Remember to consult the product user instructions for more details.

- Static electricity can be harmful to electronic components. Discharge static electricity from your body (i.e. touching grounded bare metal) before touching the product.
- Do not attempt to service the product and never disassemble the product. For some products with a user replaceable battery, please read and follow the instructions in the user manual.
- Do not spill food or liquid on your product and never push any objects into the openings of your product.
- Do not use this product near water, areas with high humidity, or condensation unless the product is specifically rated for outdoor application.
- Keep the product away from radiators and other heat sources.
- Always unplug the product from mains power before cleaning and use a dry lint free cloth only.

SICHERHEITSVORSCHRIFTEN

Die folgenden allgemeinen Sicherheitsvorschriften dienen als Hilfe zur Gewährleistung Ihrer eigenen Sicherheit und zum Schutz Ihres Produkts. Weitere Details finden Sie in den Benutzeranleitungen zum Produkt.

- Statische Elektrizität kann elektronischen Komponenten schaden. Um Schäden durch statische Aufladung zu vermeiden, leiten Sie elektrostatische Ladungen von Ihrem Körper ab, (z. B. durch Berühren eines geerdeten blanken Metallteils), bevor Sie das Produkt berühren.
- Unterlassen Sie jeden Versuch, das Produkt zu warten, und versuchen Sie nicht, es in seine Bestandteile zu zerlegen. Für einige Produkte mit austauschbaren Akkus lesen Sie bitte das Benutzerhandbuch und befolgen Sie die dort beschriebenen Anleitungen.
- Vermeiden Sie, dass Speisen oder Flüssigkeiten auf Ihr Produkt gelangen, und stecken Sie keine Gegenstände in die Gehäuseschlitze oder -öffnungen Ihres Produkts.
- Verwenden Sie dieses Produkt nicht in unmittelbarer Nähe von Wasser und nicht in Bereichen mit hoher Luftfeuchtigkeit oder Kondensation, es sei denn, es ist speziell zur Nutzung in Außenbereichen vorgesehen und eingestuft.
- Halten Sie das Produkt von Heizkörpern und anderen Quellen fern, die Wärme erzeugen.
- Trennen Sie das Produkt immer von der Stromzufuhr, bevor Sie es reinigen und verwenden Sie dazu ausschließlich ein trockenes fusselfreies Tuch.

CONSIGNES DE SÉCURITÉ

Les consignes générales de sécurité ci-après sont fournies afin d'assurer votre sécurité personnelle et de protéger le produit d'éventuels dommages. Veuillez consulter les consignes d'utilisation du produit pour plus de détails.

- L'électricité statique peut endommager les composants électroniques. Déchargez l'électricité statique de votre corps (en touchant un objet en métal relié à la terre par exemple) avant de toucher le produit.
- N'essayez pas d'intervenir sur le produit et ne le démontez jamais. Pour certains produits contenant une batterie remplaçable par l'utilisateur, veuillez lire et suivre les consignes contenues dans le manuel d'utilisation.
- Ne renversez pas d'aliments ou de liquide sur le produit et n'insérez jamais d'objets dans les orifices.
- N'utilisez pas ce produit à proximité d'un point d'eau, de zones très humides ou de condensation sauf si le produit a été spécifiquement conçu pour une application extérieure.
- Éloignez le produit des radiateurs et autres sources de chaleur.
- Débranchez toujours le produit de l'alimentation avant de le nettoyer et utilisez uniquement un chiffon sec non pelucheux.

INSTRUCCIONES DE SEGURIDAD

Las siguientes directrices de seguridad general se facilitan para ayudarle a garantizar su propia seguridad personal y para proteger el producto frente a posibles daños. No olvide consultar las instrucciones del usuario del producto para obtener más información.

- La electricidad estática puede resultar nociva para los componentes electrónicos. Descargue la electricidad estática de su cuerpo (p. ej., tocando algún metal sin revestimiento conectado a tierra) antes de tocar el producto.
- No intente realizar el mantenimiento del producto ni lo desmonte nunca. Para algunos productos con batería reemplazable por el usuario, lea y siga las instrucciones del manual de usuario.
- No derrame comida o líquidos sobre el producto y nunca deje que caigan objetos en las aberturas del mismo.
- No utilice este producto cerca del agua, en zonas con humedad o condensación elevadas a menos que el producto esté clasificado específicamente para aplicación en exteriores.
- Mantenga el producto alejado de los radiadores y de otras fuentes de calor.
- Desenchufe siempre el producto de la alimentación de red antes de limpiarlo y utilice solo un paño seco sin pelusa.

ISTRUZIONI PER LA SICUREZZA

Le seguenti linee guida sulla sicurezza sono fornite per contribuire a garantire la sicurezza personale degli utenti e a proteggere il prodotto da potenziali danni. Per maggiori dettagli, consultare le istruzioni per l'utente del prodotto.

- L'elettricità statica può essere pericolosa per i componenti elettronici. Scaricare l'elettricità statica dal corpo (ad esempio toccando una parte metallica collegata a terra) prima di toccare il prodotto.
- Non cercare di riparare il prodotto e non smontarlo mai. Per alcuni prodotti dotati di batteria sostituibile dall'utente, leggere e seguire le istruzioni riportate nel manuale dell'utente.
- Non versare cibi o liquidi sul prodotto e non spingere mai alcun oggetto nelle aperture del prodotto.
- Non usare questo prodotto vicino all'acqua, in aree con elevato grado di umidità o soggette a condensa a meno che il prodotto non sia specificatamente approvato per uso in ambienti esterni.
- Tenere il prodotto lontano da caloriferi e altre fonti di calore.
- Scollegare sempre il prodotto dalla presa elettrica prima di pulirlo e usare solo un panno asciutto che non lasci filacce.

VEILIGHEIDSINFORMATIE

De volgende algemene veiligheidsinformatie werd verstrekt om uw eigen persoonlijke veiligheid te waarborgen en uw product te beschermen tegen mogelijke schade. Denk eraan om de gebruikersinstructies van het product te raadplegen voor meer informatie.

- Statische elektriciteit kan schadelijk zijn voor elektronische componenten. Ontlaad de statische elektriciteit van uw lichaam (d.w.z. het aanraken van geaard bloot metaal) voordat u het product aanraakt.
- U mag nooit proberen het product te onderhouden en u mag het product nooit demonteren. Voor sommige producten met door de gebruiker te vervangen batterij, dient u de instructies in de gebruikershandleiding te lezen en te volgen.
- Mors geen voedsel of vloeistof op uw product en u mag nooit voorwerpen in de openingen van uw product duwen.
- Gebruik dit product niet in de buurt van water, gebieden met hoge vochtigheid of condensatie, tenzij het product specifiek geclassificeerd is voor gebruik buitenshuis.
- Houd het product uit de buurt van radiators en andere warmtebronnen.
- U dient het product steeds los te koppelen van de stroom voordat u het reinigt en gebruik uitsluitend een droge pluisvrije doek.

Disposing and Recycling Your Product



EN

ENGLISH



This symbol on the product or packaging means that according to local laws and regulations this product should not be disposed of in household waste but sent for recycling. Please take it to a collection point designated by your local authorities once it has reached the end of its life, some will accept products for free. By recycling the product and its packaging in this manner you help to conserve the environment and protect human health.

D-Link and the Environment

At D-Link, we understand and are committed to reducing any impact our operations and products may have on the environment. To minimise this impact D-Link designs and builds its products to be as environmentally friendly as possible, by using recyclable, low toxic materials in both products and packaging.

D-Link recommends that you always switch off or unplug your D-Link products when they are not in use. By doing so you will help to save energy and reduce CO2 emissions.

To learn more about our environmentally responsible products and packaging please visit www.dlinkgreen.com.

DEUTSCH

DE



Dieses Symbol auf dem Produkt oder der Verpackung weist darauf hin, dass dieses Produkt gemäß bestehender örtlicher Gesetze und Vorschriften nicht über den normalen Hausmüll entsorgt werden sollte, sondern einer Wiederverwertung zuzuführen ist. Bringen Sie es bitte zu einer von Ihrer Kommunalbehörde entsprechend amtlich ausgewiesenen Sammelstelle, sobald das Produkt das Ende seiner Nutzungsdauer erreicht hat. Für die Annahme solcher Produkte erheben einige dieser Stellen keine Gebühren. Durch ein auf diese Weise durchgeführtes Recycling des Produkts und seiner Verpackung helfen Sie, die Umwelt zu schonen und die menschliche Gesundheit zu schützen.

D-Link und die Umwelt

D-Link ist sich den möglichen Auswirkungen seiner Geschäftstätigkeiten und seiner Produkte auf die Umwelt bewusst und fühlt sich verpflichtet, diese entsprechend zu mindern. Zu diesem Zweck entwickelt und stellt D-Link seine Produkte mit dem Ziel größtmöglicher Umweltfreundlichkeit her und verwendet wiederverwertbare, schadstoffarme Materialien bei Produktherstellung und Verpackung.

D-Link empfiehlt, Ihre Produkte von D-Link, wenn nicht in Gebrauch, immer auszuschalten oder vom Netz zu nehmen. Auf diese Weise helfen Sie, Energie zu sparen und CO2-Emissionen zu reduzieren.

Wenn Sie mehr über unsere umweltgerechten Produkte und Verpackungen wissen möchten, finden Sie entsprechende Informationen im Internet unter www.dlinkgreen.com.

FRANÇAIS**FR**

Ce symbole apposé sur le produit ou son emballage signifie que, conformément aux lois et réglementations locales, ce produit ne doit pas être éliminé avec les déchets domestiques mais recyclé. Veuillez le rapporter à un point de collecte prévu à cet effet par les autorités locales; certains accepteront vos produits gratuitement. En recyclant le produit et son emballage de cette manière, vous aidez à préserver l'environnement et à protéger la santé de l'homme.

D-Link et l'environnement

Chez D-Link, nous sommes conscients de l'impact de nos opérations et produits sur l'environnement et nous engageons à le réduire. Pour limiter cet impact, D-Link conçoit et fabrique ses produits de manière aussi écologique que possible, en utilisant des matériaux recyclables et faiblement toxiques, tant dans ses produits que ses emballages.

D-Link recommande de toujours éteindre ou débrancher vos produits D-Link lorsque vous ne les utilisez pas. Vous réaliserez ainsi des économies d'énergie et réduirez vos émissions de CO2.

Pour en savoir plus sur les produits et emballages respectueux de l'environnement, veuillez consulter le www.dlinkgreen.com.

ESPAÑOL**ES**

Este símbolo en el producto o el embalaje significa que, de acuerdo con la legislación y la normativa local, este producto no se debe desechar en la basura doméstica sino que se debe reciclar. Llévelo a un punto de recogida designado por las autoridades locales una vez que ha llegado al fin de su vida útil; algunos de ellos aceptan recogerlos de forma gratuita. Al reciclar el producto y su embalaje de esta forma, contribuye a preservar el medio ambiente y a proteger la salud de los seres humanos.

D-Link y el medio ambiente

En D-Link, comprendemos y estamos comprometidos con la reducción del impacto que puedan tener nuestras actividades y nuestros productos en el medio ambiente. Para reducir este impacto, D-Link diseña y fabrica sus productos para que sean lo más ecológicos posible, utilizando materiales reciclables y de baja toxicidad tanto en los productos como en el embalaje.

D-Link recomienda apagar o desenchufar los productos D-Link cuando no se estén utilizando. Al hacerlo, contribuirá a ahorrar energía y a reducir las emisiones de CO2.

Para obtener más información acerca de nuestros productos y embalajes ecológicos, visite el sitio www.dlinkgreen.com.

ITALIANO**IT**

La presenza di questo simbolo sul prodotto o sulla confezione del prodotto indica che, in conformità alle leggi e alle normative locali, questo prodotto non deve essere smaltito nei rifiuti domestici, ma avviato al riciclo. Una volta terminato il ciclo di vita utile, portare il prodotto presso un punto di raccolta indicato dalle autorità locali. Alcuni questi punti di raccolta accettano gratuitamente i prodotti da riciclare. Scegliendo di riciclare il prodotto e il relativo imballaggio, si contribuirà a preservare l'ambiente e a salvaguardare la salute umana.

D-Link e l'ambiente

D-Link cerca da sempre di ridurre l'impatto ambientale dei propri stabilimenti e dei propri prodotti. Allo scopo di ridurre al minimo tale impatto, D-Link progetta e realizza i propri prodotti in modo che rispettino il più possibile l'ambiente, utilizzando materiali riciclabili a basso tasso di tossicità sia per i prodotti che per gli imballaggi.

D-Link raccomanda di spegnere sempre i prodotti D-Link o di scollegarne la spina quando non vengono utilizzati. In questo modo si contribuirà a risparmiare energia e a ridurre le emissioni di anidride carbonica.

Per ulteriori informazioni sui prodotti e sugli imballaggi D-Link a ridotto impatto ambientale, visitate il sito all'indirizzo www.dlinkgreen.com.

NEDERLANDS**NL**

Dit symbool op het product of de verpakking betekent dat dit product volgens de plaatselijke wetgeving niet mag worden weggegooid met het huishoudelijk afval, maar voor recyclage moeten worden ingeleverd. Zodra het product het einde van de levensduur heeft bereikt, dient u het naar een inzamelpunt te brengen dat hiertoe werd aangeduid door uw plaatselijke autoriteiten, sommige autoriteiten accepteren producten zonder dat u hiervoor dient te betalen. Door het product en de verpakking op deze manier te recyclen helpt u het milieu en de gezondheid van de mens te beschermen.

D-Link en het milieu

Bij D-Link spannen we ons in om de impact van onze handelingen en producten op het milieu te beperken. Om deze impact te beperken, ontwerpt en bouwt D-Link zijn producten zo milieuvriendelijk mogelijk, door het gebruik van recycleerbare producten met lage toxiciteit in product en verpakking.

D-Link raadt aan om steeds uw D-Link producten uit te schakelen of uit de stekker te halen wanneer u ze niet gebruikt. Door dit te doen bespaart u energie en beperkt u de CO₂-emissies.

Breng een bezoek aan www.dlinkgreen.com voor meer informatie over onze milieuverantwoorde producten en verpakkingen.

POLSKI**PL**

Ten symbol umieszczony na produkcie lub opakowaniu oznacza, że zgodnie z miejscowym prawem i lokalnymi przepisami niniejszego produktu nie wolno wyrzucać jak odpady czy śmieci z gospodarstwa domowego, lecz należy go poddać procesowi recyklingu. Po zakończeniu użytkowania produktu, niektóre odpowiednie do tego celu podmioty przyjmą takie produkty nieodpłatnie, dlatego prosimy dostarczyć go do punktu zbiórki wskazanego przez lokalne władze. Poprzez proces recyklingu i dzięki takiemu postępowaniu z produktem oraz jego opakowaniem, pomogą Państwo chronić środowisko naturalne i dbać o ludzkie zdrowie.

D-Link i środowisko

D-Link podchodzimy w sposób świadomy do ochrony otoczenia oraz jesteśmy zaangażowani w zmniejszanie wpływu naszych działań i produktów na środowisko naturalne. W celu zminimalizowania takiego wpływu firma D-Link konstruuje i wytwarza swoje produkty w taki sposób, aby były one jak najbardziej przyjazne środowisku, stosując do tych celów materiały nadające się do powtórnego wykorzystania, charakteryzujące się małą toksycznością zarówno w przypadku samych produktów jak i opakowań.

Firma D-Link zaleca, aby Państwo zawsze prawidłowo wyłączali z użytku swoje produkty D-Link, gdy nie są one wykorzystywane. Postępując w ten sposób pozwalają Państwo oszczędzać energię i zmniejszać emisje CO₂.

Aby dowiedzieć się więcej na temat produktów i opakowań mających wpływ na środowisko prosimy zapoznać się ze stroną Internetową www.dlinkgreen.com.

ČESKY**CZ**

Tento symbol na výrobku nebo jeho obalu znamená, že podle místně platných předpisů se výrobek nesmí vyhazovat do komunálního odpadu, ale odeslat k recyklaci. Až výrobek doslouží, odnese jej prosím na sběrné místo určené místními úřady k tomuto účelu. Některá sběrná místa přijímají výrobky zdarma. Recyklací výrobku i obalu pomáháte chránit životní prostředí i lidské zdraví.

D-Link a životní prostředí

Ve společnosti D-Link jsme si vědomi vlivu našich provozů a výrobků na životní prostředí a snažíme se o minimalizaci těchto vlivů. Proto své výrobky navrhujeme a vyrábíme tak, aby byly co nejekologičtější, a ve výrobcích i obalech používáme recyklovatelné a nízkotoxické materiály.

Společnost D-Link doporučuje, abyste své výrobky značky D-Link vypnuli nebo vytáhli ze zásuvky vždy, když je nepoužíváte. Pomůžete tak šetřit energii a snížit emise CO₂.

Více informací o našich ekologických výrobcích a obalech najdete na adrese www.dlinkgreen.com.

MAGYAR**HU**

Ez a szimbólum a terméken vagy a csomagoláson azt jelenti, hogy a helyi törvényeknek és szabályoknak megfelelően ez a termék nem semmisíthető meg a háztartási hulladékkal együtt, hanem újrahasznosításra kell küldeni. Kérjük, hogy a termék élettartamának elteltét követően vigye azt a helyi hatóság által kijelölt gyűjtőhelyre. A termékek egyes helyeken ingyen elhelyezhetők. A termék és a csomagolás újrahasznosításával segíti védeni a környezetet és az emberek egészségét.

A D-Link és a környezet

A D-Linknél megértjük és elkötelezettek vagyunk a műveleteink és termékeink környezetre gyakorolt hatásainak csökkentésére. Az ezen hatás csökkentése érdekében a D-Link a lehető leginkább környezetbarát termékeket tervez és gyárt azáltal, hogy újrahasznosítható, alacsony károsanyag-tartalmú termékeket gyárt és csomagolásokat alkalmaz.

A D-Link azt javasolja, hogy mindig kapcsolja ki vagy húzza ki a D-Link termékeket a tápforrásból, ha nem használja azokat. Ezzel segít az energia megtakarításában és a széndioxid kibocsátásának csökkentésében.

Környezetbarát termékeinkről és csomagolásainkról további információkat a www.dlinkgreen.com weboldalon tudhat meg.

NORSK**NO**

Dette symbolet på produktet eller forpakningen betyr at dette produktet ifølge lokale lover og forskrifter ikke skal kastes sammen med husholdningsavfall, men leveres inn til gjenvinning. Vennligst ta det til et innsamlingssted anvist av lokale myndigheter når det er kommet til slutten av levetiden. Noen steder aksepteres produkter uten avgift. Ved på denne måten å gjenvinne produktet og forpakningen hjelper du å verne miljøet og beskytte folks helse.

D-Link og miljøet

Hos D-Link forstår vi oss på og er forpliktet til å minske innvirkningen som vår drift og våre produkter kan ha på miljøet. For å minimalisere denne innvirkningen designer og lager D-Link produkter som er så miljøvennlig som mulig, ved å bruke resirkulerbare, lav-toksiske materialer både i produktene og forpakningen.

D-Link anbefaler at du alltid slår av eller frakobler D-Link-produkter når de ikke er i bruk. Ved å gjøre dette hjelper du å spare energi og å redusere CO2-utslipp.

For mer informasjon angående våre miljøansvarlige produkter og forpakninger kan du gå til www.dlinkgreen.com.

DANSK**DK**

Dette symbol på produktet eller emballagen betyder, at dette produkt i henhold til lokale love og regler ikke må bortskaffes som husholdningsaffald, mens skal sendes til genbrug. Indlever produktet til et indsamlingssted som angivet af de lokale myndigheder, når det er nået til slutningen af dets levetid. I nogle tilfælde vil produktet blive modtaget gratis. Ved at indlevere produktet og dets emballage til genbrug på denne måde bidrager du til at beskytte miljøet og den menneskelige sundhed.

D-Link og miljøet

Hos D-Link forstår vi og bestræber os på at reducere enhver indvirkning, som vores aktiviteter og produkter kan have på miljøet. For at minimere denne indvirkning designer og producerer D-Link sine produkter, så de er så miljøvenlige som muligt, ved at bruge genanvendelige materialer med lavt giftighedsniveau i både produkter og emballage.

D-Link anbefaler, at du altid slukker eller frakobler dine D-Link-produkter, når de ikke er i brug. Ved at gøre det bidrager du til at spare energi og reducere CO₂-udledningerne.

Du kan finde flere oplysninger om vores miljømæssigt ansvarlige produkter og emballage på www.dlinkgreen.com.

SUOMI**FI**

Tämä symboli tuotteen pakkauksessa tarkoittaa, että paikallisten lakien ja säännösten mukaisesti tätä tuotetta ei pidä hävittää yleisen kotitalousjätteen seassa vaan se tulee toimittaa kierrätettäväksi. Kun tuote on elinkaarensa päässä, toimita se lähimpään viranomaisten hyväksymään kierrätyspisteeseen. Kierrättämällä käytetyn tuotteen ja sen pakkauksen autat tukemaan sekä ympäristön että ihmisten terveyttä ja hyvinvointia.

D-Link ja ympäristö

D-Link ymmärtää ympäristönsuojelun tärkeyden ja on sitoutunut vähentämään tuotteistaan ja niiden valmistuksesta ympäristölle mahdollisesti aiheutuvia haittavaikutuksia. Nämä negatiiviset vaikutukset minimoidakseen D-Link suunnittelee ja valmistaa tuotteensa mahdollisimman ympäristöystävällisiksi käyttämällä kierrätettäviä, alhaisia pitoisuuksia sisältäviä materiaaleja sekä tuotteissaan että niiden pakkauksissa.

Suosittellemme, että irrotat D-Link-tuotteesi virtalähteestä tai sammutat ne aina, kun ne eivät ole käytössä. Toimimalla näin autat säästämään energiaa ja vähentämään hiilidioksiidipäästöjä.

Lue lisää ympäristöystävällisistä D-Link-tuotteista ja pakkauksistamme osoitteesta www.dlinkgreen.com.

SVENSKA**SE**

Den här symbolen på produkten eller förpackningen betyder att produkten enligt lokala lagar och föreskrifter inte skall kastas i hushållssoporna utan i stället återvinnas. Ta den vid slutet av dess livslängd till en av din lokala myndighet utsedd uppsamlingsplats, vissa accepterar produkter utan kostnad. Genom att på detta sätt återvinna produkten och förpackningen hjälper du till att bevara miljön och skydda människors hälsa.

D-Link och miljön

På D-Link förstår vi och är fast beslutna att minska den påverkan våra verksamheter och produkter kan ha på miljön. För att minska denna påverkan utformar och bygger D-Link sina produkter för att de ska vara så miljövänliga som möjligt, genom att använda återvinningsbara material med låg gifthalt i både produkter och förpackningar.

D-Link rekommenderar att du alltid stänger av eller kopplar ur dina D-Link produkter när du inte använder dem. Genom att göra detta hjälper du till att spara energi och minska utsläpp av koldioxid.

För mer information om våra miljöansvariga produkter och förpackningar www.dlinkgreen.com.

PORTUGUÊS**PT**

Este símbolo no produto ou embalagem significa que, de acordo com as leis e regulamentações locais, este produto não deverá ser eliminado juntamente com o lixo doméstico mas enviado para a reciclagem. Transporte-o para um ponto de recolha designado pelas suas autoridades locais quando este tiver atingido o fim da sua vida útil, alguns destes pontos aceitam produtos gratuitamente. Ao reciclar o produto e respectiva embalagem desta forma, ajuda a preservar o ambiente e protege a saúde humana.

A D-Link e o ambiente

Na D-Link compreendemos e comprometemo-nos com a redução do impacto que as nossas operações e produtos possam ter no ambiente. Para minimizar este impacto a D-Link concebe e constrói os seus produtos para que estes sejam o mais inofensivos para o ambiente possível, utilizando materiais recicláveis e não tóxicos tanto nos produtos como nas embalagens.

A D-Link recomenda que desligue os seus produtos D-Link quando estes não se encontrarem em utilização. Com esta acção ajudará a poupar energia e reduzir as emissões de CO₂.

Para saber mais sobre os nossos produtos e embalagens responsáveis a nível ambiental visite www.dlinkgreen.com.