



# User Manual

## AX1500 Wi-Fi 6 Extender

---

# Preface

D-Link reserves the right to revise this publication and to make changes in the content hereof without obligation to notify any person or organization of such revisions or changes.

## Manual Revisions

Hardware	Revision	Date	Description
A1	v1.00	05/21/2026	Initial Version

## Trademarks

D-Link and the D-Link logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States or other countries. All other company or product names mentioned herein are trademarks or registered trademarks of their respective companies.

Apple®, Apple logo®, Safari®, iPhone®, and Macintosh® are trademarks of Apple Inc., registered in the U.S. and other countries. App Store<sup>SM</sup> is a service mark of Apple Inc.

Chrome™ browser, Google Play™ and Android™ are trademarks of Google Inc.

Internet Explorer®, Windows® and the Windows logo are trademarks of the Microsoft group of companies.

Copyright © 2026 by D-Link Corporation. All rights reserved. This publication may not be reproduced, in whole or in part, without prior expressed written permission from D-Link Corporation.

## Power Usage

### ErP Power Usage

This device is an Energy Related Product (ErP) with High Network Availability (HiNA), and automatically switches to a power-saving Network Standby mode within 1 minute of no packets being transmitted. If it is not needed during certain periods of time, it can be unplugged to save energy.


Network Standby: 2.806 watts

# Table of Contents

<b>Preface</b> .....	<b>i</b>	Smart Connect.....	30
<b>Product Overview</b> .....	<b>1</b>	Settings .....	33
Package Contents.....	1	Mode Settings.....	33
System Requirements.....	2	Management.....	34
Introduction .....	3	Time .....	34
Features.....	3	LED Settings.....	35
What is a Wireless Extender? .....	4	Schedule .....	36
Hardware Overview.....	5	System Log.....	37
Front .....	5	System Admin .....	38
Bottom Side .....	6	Admin.....	38
Back.....	7	System .....	39
<b>Installation</b> .....	<b>8</b>	Upgrade .....	40
Wireless Installation Considerations.....	8	MAC Filter .....	41
Hardware Setup .....	9	Statistics .....	42
<b>Getting Started</b> .....	<b>10</b>	<b>Connecting Wireless Clients to the Extender</b> .....	<b>43</b>
WPS-PBC Configuration .....	11	WPS Button.....	43
Assessing Uplink Signal Strength .....	12	<b>Troubleshooting</b> .....	<b>44</b>
D-Link SetupGo .....	13	<b>Wireless Basics</b> .....	<b>46</b>
Setup Wizard .....	15	Tips.....	47
Bridge Mode Settings .....	25	<b>Technical Specifications</b> .....	<b>48</b>
<b>Configuration</b> .....	<b>26</b>	<b>Regulatory Statements</b> .....	<b>49</b>
Home .....	26		
Settings .....	29		
Extender Settings .....	29		

# Product Overview

## Package Contents



SE15 AX1500 Wi-Fi 6 Extender



Quick Installation Guide

If any of the above items are missing, please contact your reseller.

# System Requirements

<p><b>Network Requirements</b></p>	<ul style="list-style-type: none"> <li>• A wireless router with an active Internet connection.</li> <li>• IEEE 802.11ax, IEEE 802.11ac, 802.11n, 802.11g, 802.11b, or 802.11a wireless clients/devices</li> </ul>
<p><b>Web-based Configuration Utility Requirements</b></p>	<p><b>A Computer or Mobile Device with the following:</b></p> <ul style="list-style-type: none"> <li>• Windows®, Apple® Mac OS®, or Linux-based operating system</li> <li>• Wireless adapter or Wi-Fi functionality</li> <li>• An Apple® iPhone®, iPad®, or Android™ device</li> </ul> <p><b>Browser Requirements:</b></p> <ul style="list-style-type: none"> <li>• Microsoft Edge</li> <li>• Mozilla Firefox 28 or higher</li> <li>• Apple Safari 6 or higher</li> <li>• Google Chrome 28 or higher</li> </ul>
<p><b>D-Link SetupGo App Requirements</b></p>	<ul style="list-style-type: none"> <li>• iOS® or Android™ device (Please refer to the description of the app's page to check whether your device is compatible.)</li> </ul>

# Introduction

The SE15 AX1500 Wi-Fi 6 Extender is designed to enhance and extend your existing wireless network, delivering more reliable coverage throughout your home or small offices. Compatible with any Wi-Fi router or gateway, the SE15 provides a simple and effective solution for eliminating weak signal areas while maintaining robust network protection.

## Features

### **High-speed Wireless Performance With Wireless 802.11ax Technology**

Featuring the latest Wi-Fi 6 technology, dual-band connectivity, and advanced security with WPA3 encryption, the SE15 ensures efficient performance for modern online activities such as video streaming, video calls, and file transfers.

### **Compatibility**

The SE15 is not only compatible with the latest 802.11ax standard, but also backwards compatible with IEEE 802.11ac/n/g/b/a wireless devices, so you can use your existing devices without sacrificing performance.

### **Compact, Easy to Set Up and Use**

The SE15 is a compact device that is ideal for use at home or a small office, as it does not require much space with its diminutive wall-plug design. The bright signal indicator LED makes it easy to find a suitable location. Setting up the AX1500 Wi-Fi 6 Extender is simple. In addition to the setup wizard through the web interface, the supported D-Link SetupGo app on your compatible iOS or Android device offers a guided step-by-step process.

### **Latest Wireless Network Security and Encryption**

The SE15 features the most advanced and robust WPA3 technology to help prevent unauthorized access to the wireless network. Support for WPA3, WPA2, and WPA standards ensure that you'll be able to use the best possible encryption methods with your compatible wireless devices.

### **Extend and Customize Your High-speed Wireless AX Network**


D-Link's S Series provides a complete solution to effortlessly expand the coverage of your high-speed wireless AX network. With its automatic pairing feature, adding extender devices is quick and seamless. Simply download the D-Link SetupGo app to enjoy fast, easy setup and pairing.

\* Maximum wireless signal rate derived from standard IEEE specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead may lower actual data throughput rate. Environmental conditions will adversely affect wireless signal range.


# What is a Wireless Extender?

The SE15 is a repeater that extends the range of an existing wireless network to provide better signals for parts of your home or office that may have poor or no reception. Your existing wireless signal will be re-broadcast by the SE15, allowing you to reach the farthest corners of your home or office. Your SE15 can be connected wirelessly or with an Ethernet cable. For flexibility of access control, the extended network can be configured to inherit the network credentials from the existing network, or you can specify a different network name and password.


## Extend Your Wireless Network using Wi-Fi

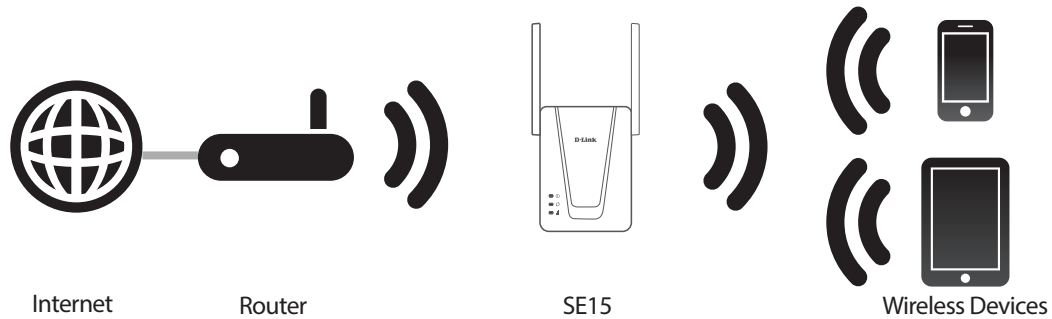

## Extend Your Wireless Network using Ethernet

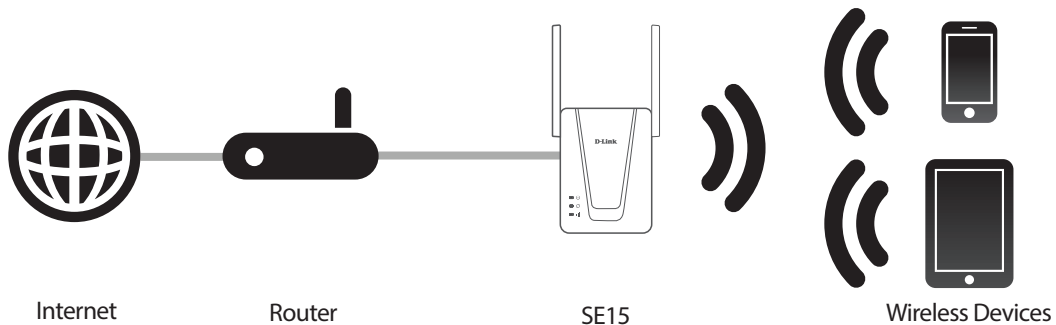

# Hardware Overview

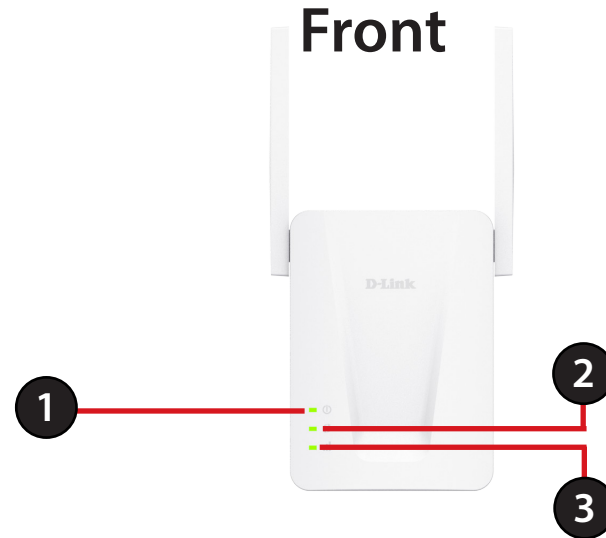

1	Power LED	Solid Green	The device is powered on.
		Blinking Green	The device is powering on and going through its startup sequence.
		Off	The device is powered off.
2	WPS LED	Solid Green	The WPS process is in progress. After pressing the WPS button, the WPS LED will blink for up to 120 seconds. If a device successfully connects via WPS, the blinking will stop.
		Off	The WPS process is idle.
3	Signal Indicator LED	Solid Green	The uplink signal strength is strong (-80 dBm or higher).
		Solid Red	The uplink signal strength is weak (less than -80 dBm).
		Off	The LED remains off when the SE15 is in Bridge mode or when the device is not wirelessly connected to a host network.

## Bottom Side



1	<b>WPS/Reset Button</b>	This button serves two purposes: WPS: Press WPS button for 1 second to start the WPS process; the WPS LED will start blinking. Connect a wireless device within 120 seconds. Reset: Press and hold the button for about 10 seconds, then release to restore the extender to its factory default settings. During the reset, all front LEDs will turn off and then turn back on. When the reset is complete, the Power LED will blink green.
2	<b>LAN</b>	Connect an Ethernet cable to provide wireless connectivity to an existing wired network.

## Back

You may locate the Wi-Fi name (SSID) and password for your SE15. This information is printed on the device label on the back of the device. You will need this information to connect your computer or mobile device to the default network (SSID) of your SE15.



# Installation


## Wireless Installation Considerations

The SE15 lets you extend your existing wireless network's coverage as long as it is within range of the uplink network. Keep in mind that the SE15's extension range may be limited by the number, thickness and location of walls, ceilings, or other objects that the wireless signals must pass through. Typical ranges vary depending on the types of materials and background RF (radio frequency) noise in your home or business. The key to maximizing wireless range is to follow these basic guidelines:

1. Keep the number of walls and ceilings between the D-Link extender and other network devices to a minimum - each wall or ceiling can reduce your adapter's range from 3-90 feet (1-30 meters.) Position your devices so that the number of walls or ceilings is minimized.
2. Be aware of the direct line between network devices. A wall that is 1.5 feet thick (0.5 meters), at a 45-degree angle appears to be almost 3 feet (1 meter) thick. At a 2-degree angle it looks over 42 feet (14 meters) thick! Position devices so that the signal will travel straight through a wall or ceiling (instead of at an angle) for better reception.
3. Building materials make a difference. A solid metal door or aluminum studs may have a negative effect on range. Try to position extenders, access points, wireless routers, and computers so that the signal passes through drywall or open doorways. Materials and objects such as glass, steel, metal, walls with insulation, water (fish tanks), mirrors, file cabinets, brick, and concrete will degrade your wireless signal.
4. Keep your product away (at least 3-6 feet or 1-2 meters) from electrical devices or appliances that generate RF noise.
5. If you are using 2.4 GHz cordless phones or X-10 (wireless products such as ceiling fans, lights, and home security systems), your wireless connection may degrade dramatically or drop completely. Make sure your 2.4 GHz phone base is as far away from your wireless devices as possible. The base transmits a signal even if the phone is not in use.
6. For more information on connection quality assessment, refer to **Assessing Uplink Signal Strength on page 12.**

# Hardware Setup

Plug in the SE15 to a power outlet. Verify that the Power LED is blinking green before continuing with the configuration.

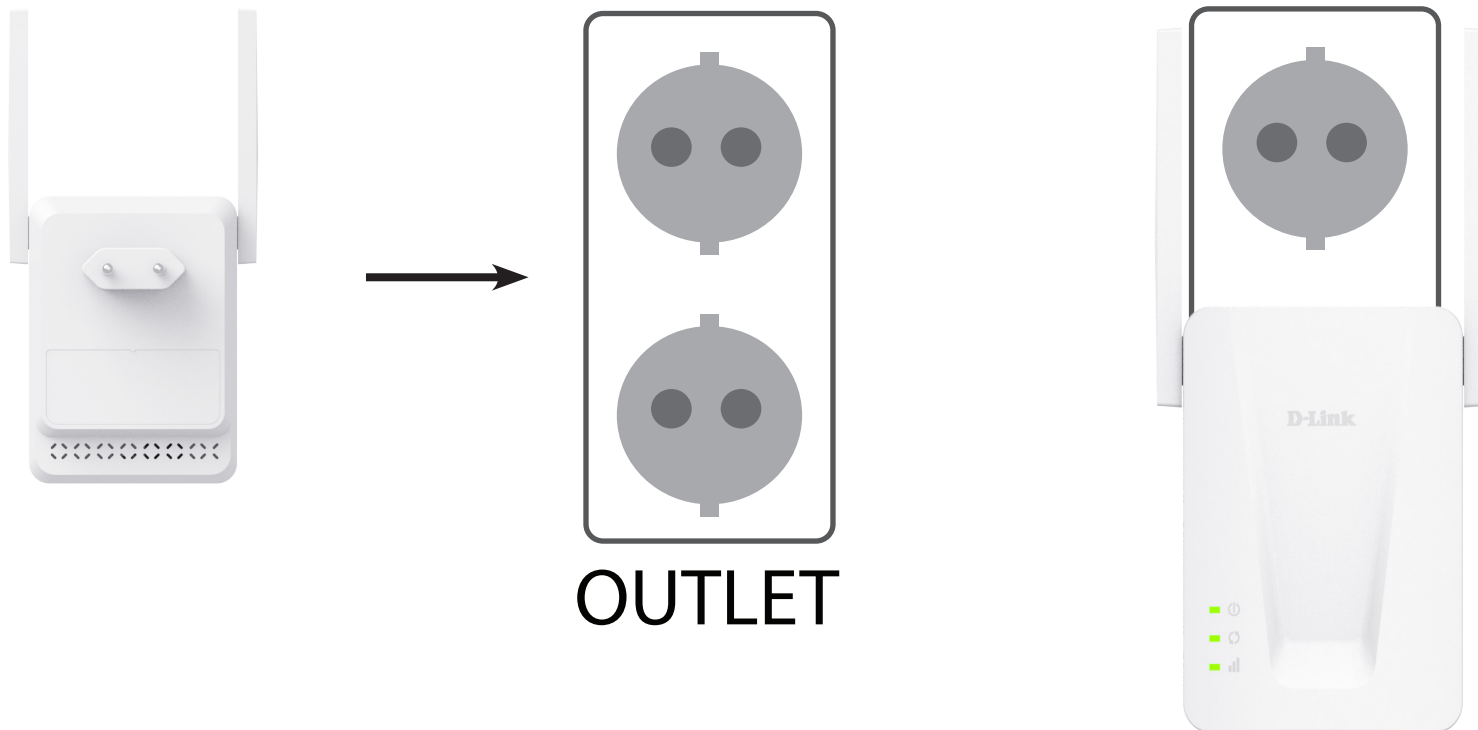

# Getting Started

There are several configuration tools you can use to set up your SE15.

- **WPS PBC** - To easily extend an existing wireless network refer to **WPS-PBC Configuration on page 11** for setup instructions.
- **D-Link SetupGo** - Use your compatible iOS or Android device to configure your extender. Refer to “D-Link SetupGo” on page 10 for setup instructions.
- **Web-based Setup Wizard** - This wizard will launch when you log into the extender’s web configuration utility for the first time. Refer to “Setup Wizard” on page 15 for setup instructions.
- **Mode Settings**- The system provides two configuration options for extending your existing network: Ethernet or Wi-Fi. Refer to “Extender Settings” on page 10 for more information regarding configuration options.

# WPS-PBC Configuration

Wi-Fi Protected Setup (WPS) makes connecting your SE15 easy. To use WPS, first make sure the uplink router or access point features a WPS Button or has a virtual WPS Button.

## Step 1 - Initiate WPS Mode

When the SE15's Power LED is solid green, push the WPS button on the main wireless router or AP, and then push the WPS button on the SE15 (see **Bottom Side on page 6**). The WPS LED will start to flash green. Please allow up to two minutes for the process to finish. The Status LED will turn solid green when the SE15 has connected successfully to the source wireless router or access point.

## Step 2 - Connecting Devices to the SE15

The SE15 is now ready to share the extended Wi-Fi network with your PCs and mobile devices. You may use the WPS method to connect devices to the extended network created by the SE15 using the same network name (SSID) and password of the uplink router. Or you may give it a new wireless credential when you later configure your extender.

The Smart Connect feature will present a single wireless network. When connecting clients to the extended network, they will be automatically added to the best band, either 2.4 GHz or 5 GHz. To disable the Smart Connect feature and individually configure 2.4 GHz and 5 GHz SSIDs, refer to "Extender Settings" on page 29.



# Assessing Uplink Signal Strength

The Power LED will turn solid green when the SE15 has connected successfully to a wireless network and is extending that network. If the Signal LED is red after the connection process has finished, the SE15 has established a poor quality connection. To improve the connection quality, the SE15 should be relocated closer to the main wireless router. Using the 5 GHz extension network is recommended in order to achieve the fastest wireless speeds. If the extender has been configured as an access point and is connected via an Ethernet cable to the uplink router, the Signal LED will not be lit.



**Strong**



**Weak**

# D-Link SetupGo

The D-Link SetupGo app allows you to install and configure your SE15 from your compatible Android or iOS device.

**Note:** *The screenshots may be different depending on your mobile device's OS version. However, the process is the same.*

## Step 1

Search and install the free **D-Link SetupGo** available on the App Store or on Google Play.



D-Link SetupGo



## Step 2

Launch D-Link SetupGo from the home screen of your device.

## Step 3


Tap **Set Up a New Device**. Scan the Setup code on the bottom of the extender. Follow the on-screen instructions to complete the setup.



### Step 4


Point your camera at the QR code on the device label. Once the scan is complete, the **Connect Device** button will appear at the bottom of the screen. Plug in the SE15 to turn it on. Then Tap **Connect Device** to continue.

**Note:** If the device has been configured previously, reset it to factory default settings. Otherwise, the app will not be able to detect and connect to it.

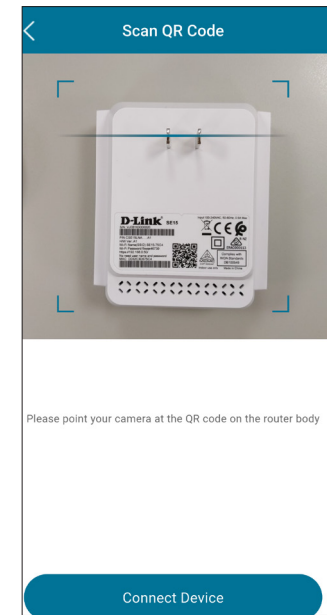

### Step 5

You will now be guided through a step-by-step process for setting up your device. Simply follow the on-screen instructions to complete the installation and configuration process.

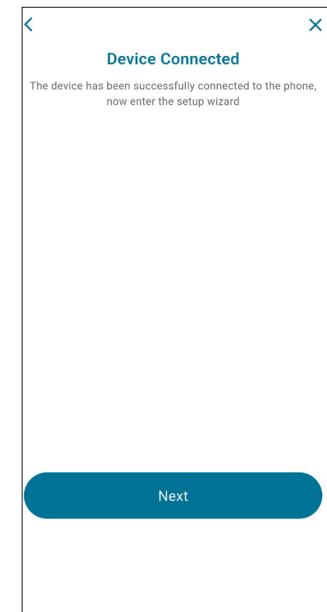

# Setup Wizard

The setup wizard is designed to guide you through a step-by-step process to configure your new SE15 to extend your existing network and connect to the Internet.

To access the setup utility on your PC, first connect to the SE15 wirelessly using the Wi-Fi name (SSID) and password located on the back of your SE15. Then open a web browser and enter **https://192.168.0.50/** in your browser's URL field. You can also access the Setup Wizard by connecting to the SE15 through a Ethernet cable.




If this is your first time logging in to the extender and no connection has been established, the setup wizard will automatically appear. By default, you do not need to enter a password to **log in** and start the configuration process.




**Note:** The Wi-Fi name (SSID), Wi-Fi password, and web configuration address are printed on the device label on the back of the device.

The default HTTPS version of the Web management page may display a security warning message alerting you of possible data breach. Refer to the below steps for additional instructions when you see such warning.



When your browser displays a security warning stating, "Your connection isn't private." You will also see Not Secure in the address bar, along with HTTPS crossed out with red lines. This is because the device's default management URL is not an actual Internet website with valid certificates. You can proceed with the setup by following these steps:


1. Click the "Advanced" button.

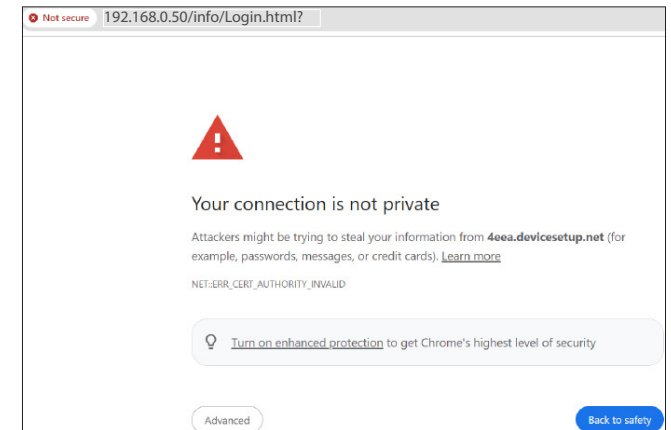

2. Click "Proceed to the default *management URL*".


Now you will be able to log in to your device.

**Note:** The default *management IP 192.168.0.50* may change after the SE15 is connected to an uplink router following the initial setup or after a mode change. As a result, the original IP address may no longer be accessible. For further assistance, refer to Questions 1 and 3 in **Troubleshooting on page 44**.

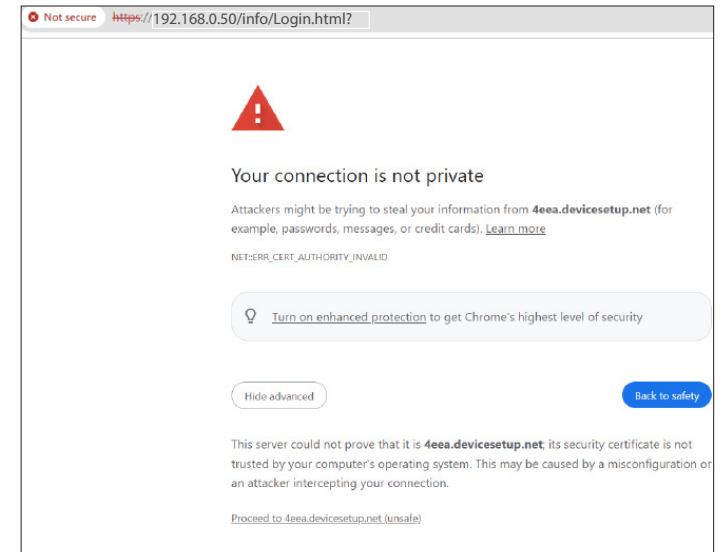


This wizard will guide you through configuring your new SE15 through a wireless connection.

Click **Next** to begin.

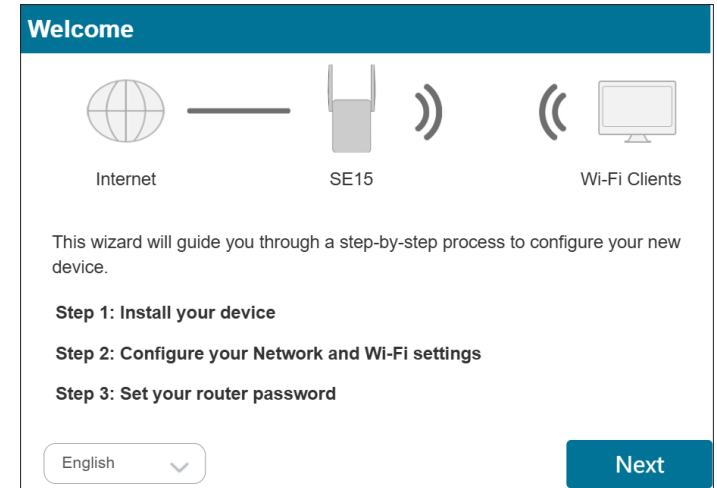


Set the extender's operation mode: Repeater or Bridge Mode.

Click **Next** to continue.

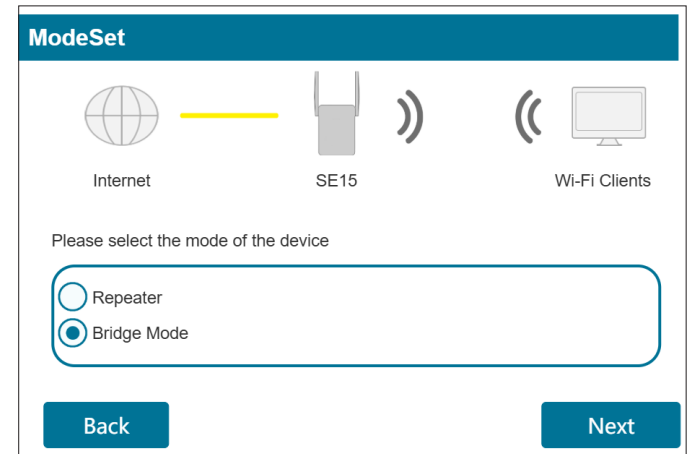

If you select Bridge mode:

Please connect the extender to the router using an Ethernet cable. Refer to **Bridge Mode Settings** on page 25 for more information.


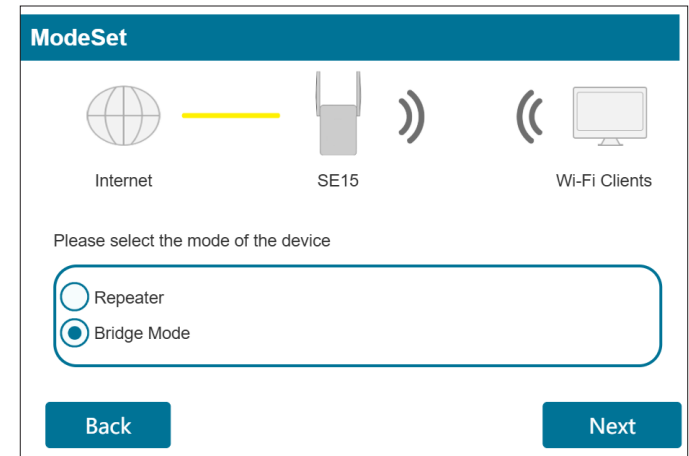


If you select Repeater mode:

The SE15 will scan for available wireless networks and display a list of results. You may choose one of the following options to proceed:

- If the wireless network you wish to extend was detected by the scan, click on it. The extender will automatically forward you to the next step.
- If the network you would like to extend was not detected by the scan, click the **Manual** button.

**Note:** If the wireless network you would like to extend was not detected by the scan, your SE15 might be out of range and you may need to reposition the extender closer to the host network device.

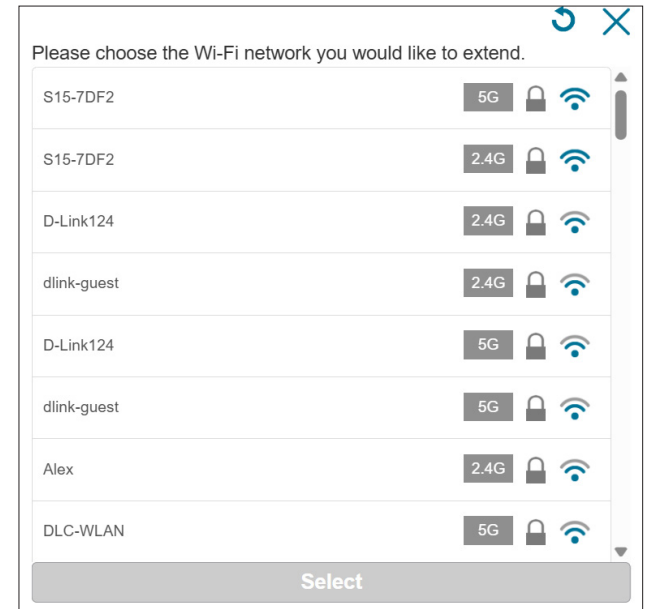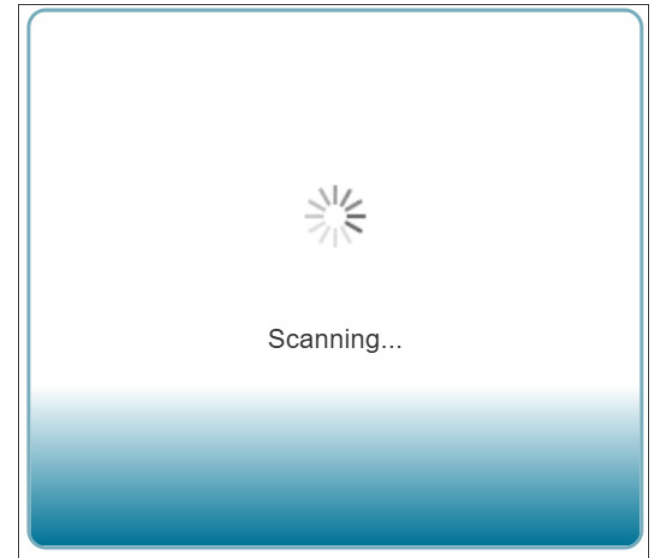

If the wireless network you wish to extend was detected by the scan, enter the password to connect to the network now. If you want to manually configure the connection, click the pencil icon and enter the Wi-Fi Network Name (SSID) and Password of the existing Wi-Fi network you wish to connect to.

Click **Next** to continue configuring your extended network, or click **Back** to return to the previous step.

A dialog box with a close button (X) in the top right corner. The text inside reads: "A password is required to join 'S15-7DF2'". Below the text is a text input field labeled "Password". At the bottom right are two buttons: "Back" and "OK".

The "Internet Setup" screen features a status bar at the top with icons for Internet, SE15, and Wi-Fi Clients. Below the status bar, there is a section titled "Select and configure the existing network you want to expand." It contains two input fields: "SSID: S15-7DF2-5G" and "Password: .....". A "Scan" button with a pencil icon is to the right of the SSID field. At the bottom are "Back" and "Next" buttons.

Enter a name (SSID) and password for identifying and encrypting your extended network.

Click **Next** to continue, or click **Back** to return to the previous step.

The password must contain 10 to 63 characters and include at least 3 of the following character types:

- Uppercase letters (A–Z)
- Lowercase letters (a-z)
- Numbers (0-9)
- Special characters such as %!@#\$( )\*&

Click **Next** to continue.

The "Wi-Fi Settings" screen features a status bar at the top with icons for Internet, SE15, and Wi-Fi Clients. Below the status bar, there is a section titled "To setup a Wi-Fi network you will need to give your Wi-Fi network a name(SSID) and password." It contains two input fields: "Wi-Fi Network Name: S15-7DF2" and "Wi-Fi Password: Marchen3648". At the bottom are "Back" and "Next" buttons.

In order to better protect the extender's web configuration utility, please enter an admin password. You will be prompted for this password each time you want to use the extender's web configuration utility.

**Note:** Click **Sync Wi-Fi Password** to make the admin password the same as the Wi-Fi password configured above. The password must contain 10 to 63 characters and include at least 3 of the following character types:


- Uppercase letters (A–Z)
- Lowercase letters (a-z)
- Numbers (0-9)
- Special characters such as %!@#\$()\*&

Click **Next** to continue.

The screenshot shows the 'Admin Password' configuration screen. At the top, there is a diagram showing the network topology: Internet (globe icon) connected to SE15 (extender icon), which is connected to Wi-Fi Clients (monitor icon). Below the diagram, a text block states: 'By default, your new device does not have a password configured for administrator access to the Web-based configuration utility. To secure your new device, please create a password below.' There are three input fields: 'Sync Wi-Fi password:' with a dropdown arrow, 'Admin Password:' with a masked password field, and 'Confirm Password:' with a masked password field. At the bottom, there are two buttons: 'Back' on the left and 'Next' on the right.

At the end of the wizard, you will be presented with a summary of your settings. It is recommended that you record this information for future reference.

Click **Finish** to close the wizard.

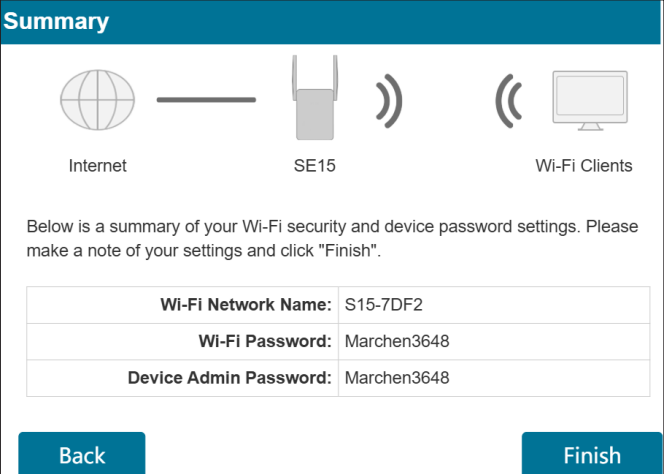


The Summary screen displays a network diagram with three components: Internet (globe icon), SE15 (router icon), and Wi-Fi Clients (monitor icon). Below the diagram is a table of settings:

<b>Wi-Fi Network Name:</b>	S15-7DF2
<b>Wi-Fi Password:</b>	Marchen3648
<b>Device Admin Password:</b>	Marchen3648

At the bottom of the screen are two buttons: "Back" on the left and "Finish" on the right.

Your changes will be saved and the extender will reboot.


Devices may be connected to the new wireless extension network once the extender successfully reboots.



The screen features a central loading icon (a circle of radiating lines) and the number "97" below it. The text reads: "When reconnecting to this device, please use the new Wi-Fi name and password you created."


Click **OK** to exit the Setup Wizard. You will be redirected to the login page.

You can now place the SE15 in a place where you require Internet access.

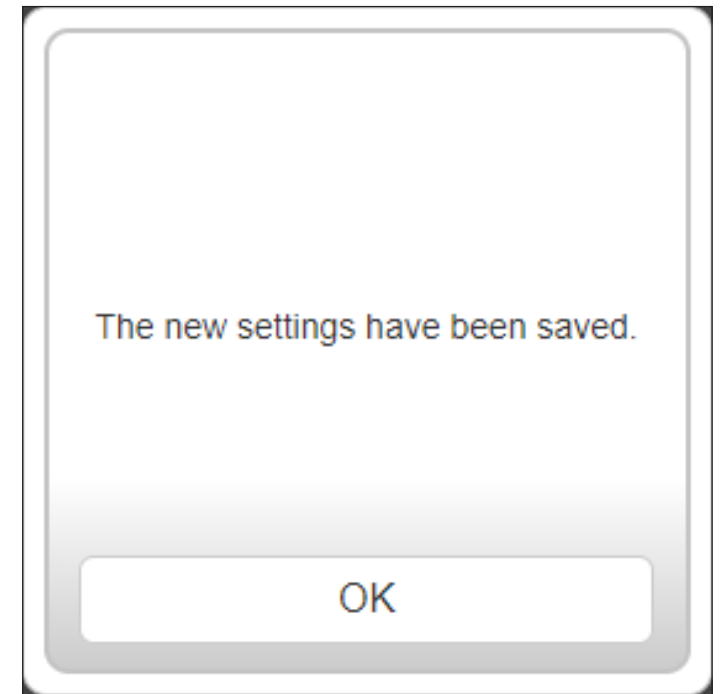

# Bridge Mode Settings

This page lets you configure the settings to use the SE15 as an access point via Bridge mode. Connect an Ethernet cable from your uplink router's LAN port to the LAN port of the SE15.

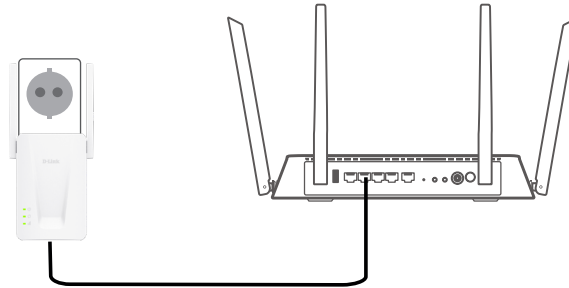

To access the mode settings page, go to **Settings > ModeSet**. Under Existing Network, choose **Bridge Mode** to utilize the SE15 as an access point. Click **Save** to apply the settings and return to the home page. After saving the settings, wait a few minutes for the uplinking process to complete. Refer to **Extender Settings** on page 29 for more information regarding configuration options.

### ModeSet

You can set various modes of the AP, Repeater

---

**Settings >> ModeSet** Save

Existing Network

Connection: Bridge Mode ▼

# Configuration Home

The home screen gives a summary of the current status of devices connected to the SE15. A green check between the device and the uplink router indicates that there is an active connection. A red cross indicates that there is no connection present, or there is a connection error. If there's no active uplink connection, click on **Click to repair** to start the setup wizard.

Internet connection is disconnected

Click on any item in the diagram for more information.

The diagram shows a network topology. On the left is an 'Internet' icon (a globe). A red line connects it to the 'SE15' icon (a router), with a red 'X' over the line and a blue button labeled 'Click to repair' below it. Another red line connects the 'SE15' icon to a 'Number of client: 0' icon (a monitor).

Internet	
Cable Status:	Connected
Connection Type:	2.4G
Connection status:	Disconnected
Connection Time:	0 Day 0 Hour 0 Min 0 Sec
MAC Address:	D0:32:C3:D6:75:C4
IP Address:	192.168.200.4
Subnet Mask:	255.255.255.0
Default Gateway:	192.168.200.1
Primary DNS Server:	192.168.200.1
Secondary DNS Server:	Not Available

**Internet** This icon shows the status of the Internet connection to the uplink router. It is grey if the SE15 is not connected to an uplink router. Once connected, click on it to see its connection details.

**SE15** Click on this icon to see network setting status such as IP and MAC address of the SE15.

**Connected Clients** Click on the Connected Clients icon to see client details.

Once your Internet connection is set up, you can view the details of the IPv4 Network and the Wi-Fi network by clicking on the SE15 icon.

Internet connection is Connected  
Click on any item in the diagram for more information.

SE15 is Repeater mode

IPv4 Network		Wi-Fi	
MAC Address:	D0:32:C3:D6:75:C4	Status:	Enable
Router IP Address:	192.168.200.4	Wi-Fi Name (SSID):	S15-7DF2
Subnet Mask:	255.255.255.0		

[Go to settings](#)


By clicking the Internet icon, you will see the details of the Existing Network. This contains information regarding the Connection Type and Status, Connection Uptime, and DNS servers.

Internet connection is Connected  
Click on any item in the diagram for more information.

Internet

Cable Status:	Connected	MAC Address:	D0:32:C3:D6:75:C4
Connection Type:	2.4G	IP Address:	192.168.200.4
Connection status:	Disconnected	Subnet Mask:	255.255.255.0
Connection Time:	0 Day 0 Hour 0 Min 0 Sec	Default Gateway:	192.168.200.1
		Primary DNS Server:	192.168.200.1
		Secondary DNS Server:	Not Available

Clicking the Connected Clients icon will show you the devices that are currently connected to the SE15 along with their IP and MAC addresses.

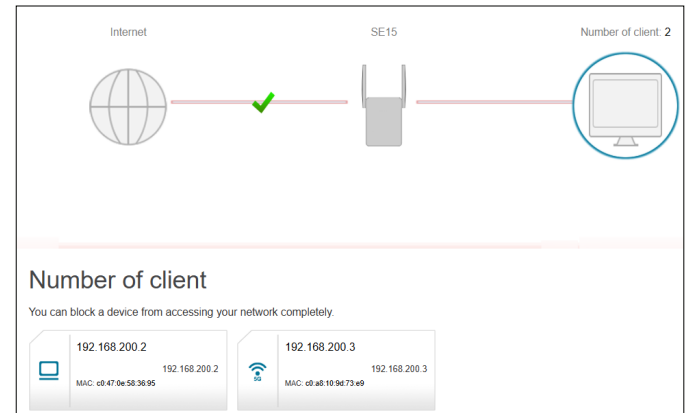

# Settings

## Extender Settings

This page lets you configure the settings for the SE15's extended wireless network. To access this page, go to **Settings > Wireless**. Click **Save** to apply the settings and a reboot may be required.

### Wireless

Use this section to configure the wireless settings for your Router. Please make sure that any changes made in this section will need to be updated on your wireless device.

**Settings >> Wireless** Save

**Smart Connect**


Status:

---

**Wireless**

Wi-Fi Name (SSID):

Security Mode:

Password:  

---

**Wi-Fi Protected Setup**

WPS-PBC Status:

## Smart Connect

**Smart Connect** Enable or disable the Smart Connect feature. When enabled, fewer configuration options will be available to simplify configuration. And the wireless network will transmit and receive data on the 5GHz frequency if the client device supports 5GHz.

### Extended Wi-Fi - Smart Connect Enabled

**Wi-Fi Name (SSID)** This is the name of the SE15's wireless network. If using **Wi-Fi**, the SE15 will rebroadcast the uplink router's Internet connection under this SSID. You may also manually set the SSID of the extended network.

**Password** Enter the password or network key for clients to connect with the extended Wi-Fi network.

**Security Mode** Select a connection security requirement from the following: **Open, WPA-PSK, WPA/WPA2-PSK, WPA2-PSK, WPA2/WPA3-PSK or WPA3-AES.** WPA3 provides the highest level of encryption among these. Note that WPS will be enabled only when WPA2 (default) or Open is used.

If Smart Connect is disabled, configure 2.4 GHz and 5 GHz networks individually as shown below.

### Wi-Fi Protected Setup

**WPS-PBC Status** Enable or disable Wi-Fi Protected Setup (WPS).

The screenshot shows the configuration interface for Smart Connect. At the top, the 'Smart Connect' feature is enabled, indicated by a blue toggle switch. Below this, the 'Wireless' section contains three fields: 'Wi-Fi Name (SSID)' with the value 'S15-7DF2', 'Security Mode' set to 'WPA2-PSK' (indicated by a dropdown arrow), and 'Password' which is masked with eight dots and has a blue eye icon to toggle visibility. At the bottom, the 'Wi-Fi Protected Setup' section shows the 'WPS-PBC Status' is also enabled, indicated by a blue toggle switch.

## Wireless - Smart Connect Disabled


### 2.4 GHz Wi-Fi

- Wi-Fi Name (SSID)** This is the name of the SE15's extended network. If using **Wi-Fi**, the SE15 will rebroadcast the uplink router's Internet connection under this SSID. You may also manually set the SSID of the extended network.
- Password** Enter the password or network key for clients to connect with the extended Wi-Fi network.
- Security Mode** Select a connection security requirement from the following: **Open, WPA-PSK, WPA/WPA2-PSK, WPA2-PSK, WPA2/WPA3-PSK** or **WPA3-AES**. WPA3 provides the highest level of encryption among these. Note that WPS will be enabled only when WPA2 or Open is used.

2.4GHz

Wi-Fi Name (SSID):

Security Mode:

Password:  

## Wi-Fi Protected Setup

- WPS-PBC Status** Enable or disable Wi-Fi Protected Setup (WPS).

## Wireless - Smart Connect Disabled (Continued)

### 5 GHz Extended Wi-Fi

**Wi-Fi Name (SSID)** This is the name of the SE15's extended network. If using **Wi-Fi**, the SE15 will rebroadcast the uplink router's Internet connection under this SSID. You may also manually set the SSID of the extended network.

**Password** Enter the password or network key for connecting with the extended Wi-Fi network.

**Security Mode** Select a connection security requirement from the following: **Open, WPA-PSK, WPA/WPA2-PSK, WPA2-PSK, WPA2/WPA3-PSK or WPA3-AES**. WPA3 provides the highest level of encryption among these. Note that WPS will be enabled only when WPA2 or Open is used.

## Advanced Settings

**DFS Channel** Enable Dynamic Frequency Selection (DFS) channels to use additional channels if the extender is not in an area close by an airport or a radar station. If enabled, the extender will listen for radar signals, and if radar signals are detected, it will automatically switch to a new channel. The default is disabled.

## Wi-Fi Protected Setup

**WPS-PBC Status** Enable or disable Wi-Fi Protected Setup (WPS).

# Settings

## Mode Settings

This page lets you configure the connection mode of the SE15's extended wireless network. To access this page, go to **Settings > ModeSet**. Click **Save** to apply the settings and a reboot may be required.

### Connection

**Mode** Select either Bridge or Repeater mode. Refer to **Bridge Mode Settings on page 25** for Bridge Mode setup. For Repeater Mode, enter the following information.

**SSID** Enter the SSID of an uplink router. Or you may click Scan to scan for available wireless networks.

**Password** Enter the password or network key for authenticating with the uplink router.

**Sync with upper router** Enable this to synchronize the Wi-Fi setting with the uplink router. The default is disabled.

ModeSet

You can set various modes of the AP. Repeater

Settings >> ModeSet Save

Existing Network

Connection: Repeater

SSID:

Password:

Scan

Sync with upper router:

# Management Time

You can set time zone and the Network Time Protocol (NTP) server on this page. Go to **Management > Time** to access this page. Click **Save** to apply the settings when you are done with your changes.

## Time Configuration

**Enable Daylight Saving** Automatically adjusts the system clock forward or backward when daylight saving time starts or ends.

## Automatic Time Configuration

**Sync via NTP Server** Enable this option to synchronize the time settings with an NTP server automatically.

**NTP Server** Select a time server from the drop-down menu to synchronize the time and date.  
Choose Manual to set the NTP server's IP address or domain name.

**Time Zone** Select your time zone.

## Manual Time Configuration

**Date** Enter the current date in this format: YYYY, mm, and dd.

**Time** Select the current time in the 24-hour clock format.

The screenshot shows the 'Time' configuration page. At the top, there is a breadcrumb trail: 'Management >> System Time'. Below this, there are three tabs: 'LED Settings', 'Schedule', and 'Save'. The main content area is divided into two sections. The first section, 'Time Configuration', displays the current time as '2020/04/04 14:14:52' and an 'Enable Daylight Saving' checkbox which is currently unchecked. The second section, 'Automatic Time Configuration', features a 'Sync via NTP Server' toggle switch that is turned on. Below this, there is an 'NTP Server' field containing 'pool.ntp.org' and a dropdown menu set to 'Manual'. At the bottom, there is a 'Time Zone' dropdown menu showing '(GMT+08:00) Beijing, Chongqing, Hong Kong, Urumqi'.

# LED Settings

This page allows you to control LED indicators of the SE15. To access this page, go to **Time > LED Settings**. Click **Save** at any time to save the changes you made on this page.

## LED Control

### LED Settings

Enable or disable the LED control:

- When disabled, the LED indicators will remain on at all times.
- When enabled, you can configure a schedule below to determine when the LED indicators should turn off.

### Custom

Select how LED indicators should be controlled:

- Always Enable: LED indicators will always be turned off.
- Scheduled: Choose a pre-configured schedule to turn off the LED indicators during a specified time period.

The screenshot shows the 'LED Time' configuration page. At the top, it says 'LED Time' and provides a note: 'Your router's internal clock is used for data logging and schedules for features. The date and time can be synchronized with a public time server on the Internet, or set manually.' Below this, there is a breadcrumb trail 'Management >> LED Settings' and three buttons: 'Time', 'Schedule', and 'Save'. The 'LED Settings' section contains a toggle switch for 'LED Settings' which is currently turned on, and a dropdown menu for 'Schedule' set to 'Always Enable'.

# Schedule

This page allows you to set schedules for LED control. To access this page, go to **Time > Schedule**. Click **Save** at any time to save the changes you made on this page.

## Schedule Configuration

To start configuring a schedule, click **Add Rule**:

**Name** Enter the name of your schedule in the **Name** field.

**Schedules** Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

To remove a time period from the schedule, click on the cross icon.



Click **Apply** to save and close the page. Then click **Save** when you are done creating schedules.

To remove a rule, click on the trash can icon in the Delete column. To edit a rule, click on its pencil icon in the Edit column.

### Schedule

Some features, such as the firewall and website filters, can be turned on or off based on a schedule. One common use of schedules is to control access to the Internet by a specified device during specified time periods.

**Management >> Schedule**

Name	Schedule	Edit	Delete
LED Time	Mon : 2:00 - 17:00		

Remaining: 0

# System Log

The router keeps a running log of events. This log can be sent to a syslog server. Go to **Management > System Log** to access this page. Click **Save** at any time to save the changes you have made on this page.

## Log Settings

**System Log** Click the **Check System Log** to download a copy of the system log to your hard drive. You can view the log entries by opening them with any text editing applications, such as WordPad, on Windows.

## SysLog Settings

**Enable Syslog** Enable this function to send the router's logs to a SysLog Server.

**Syslog Server IP Address** If **Enable Syslog** is **Enabled**, enter the IP address of the Syslog server. Or, select from the drop-down menu for IP address auto-population if the Syslog server is connected to the extender.

## System Log

On-board diagnostics run continually in the background to monitor the health of your router. The results are recorded in the system log if it is enabled. This info can be used to diagnose common problems or help Customer Support resolve issues more quickly.

### Management >> System Log

#### Log Settings

System Log

#### SysLog Settings

Enable Syslog:

# System Admin

## Admin

This page allows you to change the administrator (Admin) password. Go to **System Admin > Admin**. Click **Save** at any time to save the changes you have made on this page.

### Admin Password

**Original Password** Enter the original password for password change.

**Password** Enter a new password for the administrator account. You will need to enter this password whenever you configure the extender using a web browser. The password must adhere to the following rule:

- Contain 10 to 63 characters
- Contain at least three of the following character types: uppercase letters, lowercase letters, numbers, and special characters.

**Verify Password** Enter the new password again to confirm the entry.

The screenshot shows a web browser interface for the 'Admin' password configuration. At the top, the title is 'Admin'. Below the title, there is a warning message: 'The admin account can change all router settings. To keep your router secure, you should give the admin account a strong password.' The breadcrumb navigation shows 'Management >> Admin'. There are two buttons: 'System' and 'Save'. The main section is titled 'Admin Password' and contains three input fields: 'Original password:', 'Password:', and 'Verify password:'.

# System

This page allows you to save or restore your system configurations. It also allows you to reset or reboot the extender. To access this page, go to **System Admin > System**.

## Save Settings To Local Hard Drive

Save the system settings in a file to the local hard drive. The configuration file will be saved in your browser's download directory.

## Load Settings From Local Hard Drive

Select the system settings from a previously saved file on the local hard drive. Click the **Restore** button that appears after the configuration file is selected to load the settings.

## Restore to Factory Default Settings

Restore the system settings to factory default settings. This will erase all current settings.

## Reboot the Device

Click **Reboot** to reboot the extender.

## System

This page lets you save your router's current settings to a file, restore your settings from a file, restore your router to factory default settings, or reboot the device. Please note that restoring the settings to the factory defaults will erase all settings, including any rules you have created.

---

**Management >> System**

---

**System**

Save Settings To Local Hard Drive: Save

Load Settings From Local Hard Drive: Select File

SE15.cfg

Restore Configuration

Restore To Factory Default Settings: Restore Factory

---

**Auto Reboot Configuration**

Reboot The Device: Reboot

# Upgrade

This page allows you to upgrade the extender's firmware, either automatically or manually. To manually upgrade the firmware, download the latest firmware file from <http://support.dlink.com> in advance. To access this page, go to **Management > Upgrade**.

## Firmware

### Current Firmware Version

The current firmware's version will be displayed.

### Check for New Firmware

Click this button to start checking for a new firmware version. If a new version is found, it will prompt you to install it.

## Auto Update

### Automatic Upgrade

If enabled, the extender will automatically check for and upgrade to the latest firmware available.

### Set Update Time

You may set the SE15 to automatically upgrade its firmware at a set time by enabling this function. Set the hour and minute for automatic upgrade every day.

## Upgrade Manually

### Upgrade Firmware

If you wish to upgrade manually, first download the firmware file you wish to upgrade to. Then, click **Select File** to find the file and click **Upload** to install the new firmware.

## Upgrade

Your router can automatically detect firmware updates, but requires your authorization to install them. It is also possible to check for new firmware manually, upgrade firmware from a local file.

---

**Management >> Upgrade**

---

**Auto Update**

Auto Update:

Will automatically update during (03:14) Auto Update. [Set Update Time](#)

*Please sync system time via SNTP before setting auto update.*

---

**Firmware**

Current Firmware Version: 1.00.03  
Current Firmware Date: 2026-04-03

[Check for New Firmware](#)

---

**Upgrade Manually**

Upgrade Firmware: [Select File](#)

# MAC Filter

This page allows you to restrict clients' Internet access by specifying their MAC addresses. Go to **Management > MAC Filter** to configure the MAC Filter list.



## Filter Rule

To start configuring a MAC filtering rule, click Add Rule:

**Name** Enter the host client's name.

**MAC Address** Enter the MAC address of the client device.

Click **Apply**.

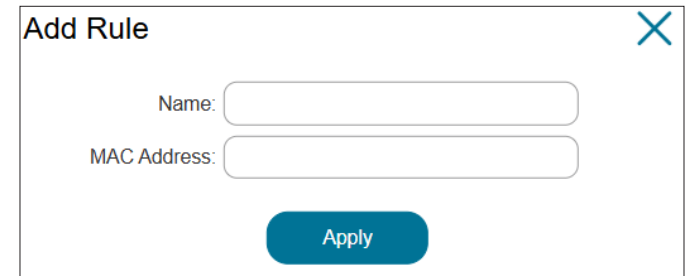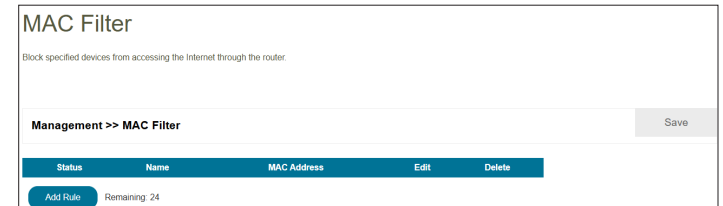

# Statistics

This page displays details about your network traffic. To access this page, go to **Management > Statistics**.


Click **Clear** to reset the statistics.

On the Statistics page you can view the amount of data that passes through the LAN and wireless interfaces.

You can view **LAN**, **Wi-Fi 2.4 GHz**, or **Wi-Fi 5 GHz** by clicking the respective tab at the top. The real-time graph of network traffic will be shown. To clear the information on the graph, click **Clear**.

The table below for each interface and radio frequency shows the total number of packets and data that are sent and received through the interface.

The traffic counter will reset if the device is rebooted.

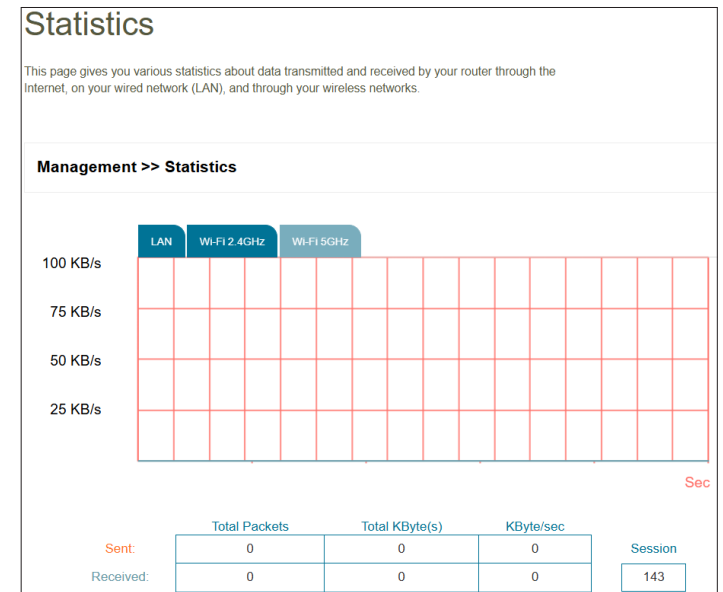

# Connecting Wireless Clients to the Extender WPS Button

Once an uplink network has been established, you may use the SE15's WPS function to add additional wireless clients to your extender's network. Many wireless devices such as wireless routers, media players, printers, and cameras will have a WPS button (or a software utility with WPS) that you can press to connect to the SE15. Please refer to the user manual for the wireless device you want to connect to make sure you understand how to enable WPS. Once you are certain, follow the steps below:

**Step 1** - Press the WPS button on the SE15 for about 1 second. The WPS LED on the device will start to blink.

**Step 2** - Within 120 seconds, press the WPS button on your wireless device.

**Step 3** - Allow up to 2 minutes to configure. Once the LED light stops blinking and turns solid green, you will be connected with WPA2 encryption (the default security mode).

**Note:** To enable or disable WPS, go to **Settings > Wireless** and toggle the WPS-PBC Status slider at the bottom of the page.

## Wi-Fi Protected Setup

WPS-PBC Status:

# Troubleshooting

This chapter provides solutions to problems that can occur during the installation and operation of the SE15. Read the following descriptions if you are having problems.

## 1. Why can't I access the web-based configuration utility?

When entering the IP address of the extender, you are not connecting to a website nor do you have to be connected to the Internet. The device has the utility built-in to a ROM chip in the device itself. Your computer must be on the same IP subnet to connect to the web-based utility.

- We recommend the following:
  - Microsoft Edge
  - Firefox® 28 or later
  - Safari® 6.0 or later
  - Google Chrome™ 28 or later
- If you have an active wired LAN Ethernet connection, try temporarily unplugging the Ethernet cable from the computer you are using to eliminate possible conflicts from having two simultaneous connections on the same computer.
- Disable any Internet security software running on the computer. Software firewalls such as ZoneAlarm, BlackICE, Sygate, Norton Personal Firewall, and Windows® XP firewall may block access to the configuration pages. Check the help files included with your firewall software for more information on the operation.

- Access the web management interface. Open your web browser and enter the address of your extender: **https://192.168.0.50**. This should open the login page for your web management. If the SE15 is not connected to an uplink router, you can try accessing the web interface using the default IP address **192.168.0.50**. If the SE15 is connected to an uplink router, the original 192.168.0.50 IP address will no longer be valid. You can try accessing the web interface using a client IP address assigned from the uplink router or **https://dlinkap.local**. The device's IP address may change after you modify the Mode Settings (go to **Settings > ModeSet**), refer to the below Question 3: How to access web management interface after changing the device's mode to Repeater or Bridge ?
- If you still cannot access the configuration, unplug the extender from the power outlet for at least 10 seconds and plug it back in. Wait about 30 seconds and try accessing the configuration. If you have multiple computers, try connecting using a different computer.

## 2. What can I do if I forgot my password?

If you forgot your password, you must reset your extender. Unfortunately this process will change all your settings back to the factory defaults.

To reset the extender, locate the reset button of the unit. Refer to **Bottom Side on page 6**. Wait about 30 seconds to access the extender and you will be required to go through the initial setup again. Refer to "Setup Wizard" on page 15.

## 3. How to access web management interface after changing the device's mode (Repeater or Bridge)?

The device's IP address may change after you modify the Mode Settings (go to **Settings > ModeSet**). Once the extended network has been successfully established, connect to the network either via a wired or wireless connection, then open a web browser and enter the following address to log in to the extender: **https://dlinkap.local**.

# Wireless Basics

D-Link wireless products are based on industry standards to provide easy-to-use and compatible high-speed wireless connectivity within your home, business or public access wireless networks. D-Link's new D-Link SetupGo products allow you to conveniently and reliably expand your existing network for improved coverage and speeds. Furthermore, you will be able to enjoy the efficacy of network management that AI-empowered traffic prioritization and Wi-Fi environment optimization delivers.

A wireless local area network (WLAN) is a cellular computer network that transmits and receives data with radio signals instead of wires. Innovative ways to utilize WLAN technology are helping people to work and communicate more efficiently. The most recent Wi-Fi 6 has substantial gains over previous generations in speeds and encryption strength. It delivers faster speeds by handling multiple devices more efficiently using advanced technologies like OFDMA and OBSS. OFDMA improves channel utilization while OBSS further eliminates network congestion.

Wireless users can use the same applications they use on a wired network. To enjoy the mobility of wireless network more safely in office environments and public areas such as airports, shops and universities, Wi-Fi Protected Access (WPA) security method is commonly employed. It uses a passphrase or key to authenticate your wireless connection. The advanced WPA3 implements the strongest password security via Simultaneous Authentication of Equals (SAE). The Simultaneous Authentication of Equals (SAE) of WPA3 enhances the protection against dictionary attacks.

## Tips

Here are a few things to keep in mind when you are installing your extender.

### **Centralize the extender's location**

For best performance, make sure you place the extender in a centralized location within your desired usage area. Try to place the extender so that there are minimal obstructions between it and the uplink router. If possible, use an elevated power outlet, so the signal can be dispersed more easily. If you have a large home or usage area, you may need several extenders in order to achieve optimal coverage.

### **Eliminate Interference**

Place home appliances such as cordless telephones, microwaves, and televisions as far away as possible from the extender. This can significantly reduce any interference that the appliances might cause since they operate on the same frequency.

### **Wireless Encryption**

Don't let your neighbors or intruders connect to your wireless network. Encrypt your wireless network by utilizing the Wi-Fi Protected Access security protocols on the extender and uplink router. Refer to the relevant sections of this manual for further details.

# Technical Specifications

## Device Interfaces

- 1 x Gigabit Ethernet LAN port
- 1 x Reset button
- 1 x WPS button

## Wi-Fi Data Rates<sup>1</sup>

- 2.4 GHz up to 300 Mbps
- 5 GHz up to 1,201 Mbps

## Standards<sup>2</sup>

- 2.4 GHz: IEEE 802.11n/g/b
- 5 GHz: IEEE 802.11ax/ac/n/a

## Antenna Types

- 2 x 2.4/5 GHz dual-band external antennas

## Security

- WPA-Personal
- WPA2-Personal
- WPA3-Personal
- Wi-Fi Protected Setup (WPS)

## Operation Mode

- Bridge mode
- Repeater mode

## Power Input

100 to 240 VAC, 50/60 Hz

## Temperature

- Operating: 0 to 40 °C (32 to 104 °F)
- Storage: -20 to 65 °C (-4 to 149 °F)

## Humidity

- Operating: 10% to 90% maximum, non-condensing
- Storage: 5% to 95% maximum, non-condensing

## Dimensions

72 x 100 x 49 mm (2.83 x 3.94 x 1.93 in); dimensions do not include plug pins

## Weight

179.6 g (6.34 oz)

<sup>1</sup> Maximum wireless signal rate derived from IEEE Standard 802.11ax/ac/n/g/b/a specifications. Actual performance may vary due to settings, cabling, temperature, network configuration, interface, device compatibility, environmental and on-site conditions, and other similar factors. References to power capability, signal or processing speed, signal range or distance, data encryption, storage capacity, display properties, or other performance metrics are based on optimal conditions derived from industry standards and provided for informational purposes only.

<sup>2</sup> Frequency Range varies depending on country's regulation.

<sup>3</sup> The router does not include 5.25-5.35 GHz & 5.47-5.725 GHz in some regions.

<sup>4</sup> Specifications may be subject to change without prior notice.

# Regulatory Statements

## **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **Non-modifications Statement:**

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

## **Caution:**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures. For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

## **Note**

The country code selection is for non-USA models only and is not available to all USA models. Per FCC regulations, all WiFi product marketed in the USA must be fixed to USA operational channels only.

**IMPORTANT NOTICE:**

**FCC Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 24 cm between the radiator and your body.

**Innovation, Science and Economic Development Canada (ISED) Statement:**

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

**Innovation, Science and Economic Development Canada (ISED) Statement:**

This device complies with ISED licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**Radiation Exposure Statement**

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 29 cm between the radiator and your body.

**Déclaration d'exposition aux radiations**

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 29 cm de distance entre la source de rayonnement et votre corps.

**Caution:**

- i.the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- ii.for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate;

**Avertissement:**

- i.les dispositifs fonctionnant dans la bande de 5 150 à 5 250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux
- ii.pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5 725 à 5 850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée, selon le cas;

**NCC 警語：**

以下警語適用台灣地區

依據 低功率電波輻射性電機管理辦法

第十二條：經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條：低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

高增益指向性天線只得應用於固定式點對點系統。

電磁波曝露量MPE標準值  $1\text{mW}/\text{cm}^2$ ，送測產品實測值為： $0.218\text{mW}/\text{cm}^2$



	<b>Frequency Band(s)</b> <b>Frequenzband</b> <b>Fréquence bande(s)</b> <b>Bandas de Frecuencia</b> <b>Frequenza/e</b> <b>Frequentie(s)</b>	<b>Max. Output Power (EIRP)</b> <b>Max. Output Power</b> <b>Puissance max en sortie (PIRE)</b> <b>Potencia máxima de Salida</b> <b>Potenza max. Output</b> <b>Max. Output Power</b>
5 G	5.15 – 5.25 GHz	200 mW
	5.25 – 5.35 GHz	200 mW
	5.47 – 5.725 GHz	1 W
2.4 G	2.4 – 2.4835 GHz	100 mW

## European Community Declaration of Conformity:

Česky [Czech]	Tímto D-Link Corporation prohlašuje, že tento produkt, jeho příslušenství a software jsou v souladu se směrnicí 2014/53/EU. Celý text ES prohlášení o shodě vydaného EU a o firmwaru produktu lze stáhnout na stránkách k produktu <a href="http://www.dlink.com">www.dlink.com</a> .
Dansk [Danish]	D-Link Corporation erklærer herved, at dette produkt, tilbehør og software er i overensstemmelse med direktiv 2014/53/EU. Den fulde tekst i EU-overensstemmelseserklæringen og produktfirmware kan wnloades fra produktsiden hos <a href="http://www.dlink.com">www.dlink.com</a> .
Deutsch [German]	Hiermit erklärt die D-Link Corporation, dass dieses Produkt, das Zubehör und die Software der Richtlinie 2014/53/EU entsprechen. Der vollständige Text der Konformitätserklärung der Europäischen Gemeinschaft sowie die Firmware zum Produkt stehen Ihnen zum Herunterladen von der Produktseite im Internet auf <a href="http://www.dlink.com">www.dlink.com</a> zur Verfügung.
Eesti [Estonian]	Käesolevaga kinnitab D-Link Corporation, et see toode, tarvikud ja tarkvara on kooskõlas direktiiviga 2014/53/EL. Euroopa Liidu vastavusdeklaratsiooni täistekst ja toote püsivara on allalaadimiseks saadaval tootelehel <a href="http://www.dlink.com">www.dlink.com</a> .
English	Hereby, D-Link Corporation, declares that this product, accessories, and software are in compliance with directive 2014/53/EU. The full text of the EU Declaration of Conformity and product firmware are available for download from the product page at <a href="http://www.dlink.com">www.dlink.com</a>
Español [Spanish]	Por la presente, D-Link Corporation declara que este producto, accesorios y software cumplen con las directivas 2014/53/UE. El texto completo de la declaración de conformidad de la UE y el firmware del producto están disponibles y se pueden descargar desde la página del producto en <a href="http://www.dlink.com">www.dlink.com</a> .
Ελληνική [Greek]	Με την παρούσα, η D-Link Corporation δηλώνει ότι αυτό το προϊόν, τα αξεσουάρ και το λογισμικό συμμορφώνονται με την Οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης της ΕΕ και το υλικολογισμικό του προϊόντος είναι διαθέσιμα για λήψη από τη σελίδα του προϊόντος στην τοποθεσία <a href="http://www.dlink.com">www.dlink.com</a> .
Français [French]	Par les présentes, D-Link Corporation déclare que ce produit, ces accessoires et ce logiciel sont conformes aux directives 2014/53/UE. Le texte complet de la déclaration de conformité de l'UE et le microprogramme du produit sont disponibles au téléchargement sur la page des produits à <a href="http://www.dlink.com">www.dlink.com</a> .
Italiano [Italian]	Con la presente, D-Link Corporation dichiara che questo prodotto, i relativi accessori e il software sono conformi alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE e il firmware del prodotto sono disponibili per il download dalla pagina del prodotto su <a href="http://www.dlink.com">www.dlink.com</a> .

Latviski [Latvian]	Ar šo uzņēmums D-Link Corporation apliecina, ka šis produkts, piederumi un programmatūra atbilst direktīvai 2014/53/ES. ES atbilstības deklarācijas pilno tekstu un produkta aparātprogrammatūru var lejupielādēt attiecīgā produkta lapā vietnē <a href="http://www.dlink.com">www.dlink.com</a> .
Lietuvių [Lithuanian]	Šiuo dokumentu „D-Link Corporation“ pareiškia, kad šis gaminys, priedai ir programinė įranga atitinka direktyvą 2014/53/ES. Visą ES atitikties deklaracijos tekstą ir gaminio programinę aparatinę įrangą galima atsisiųsti iš gaminio puslapio adresu <a href="http://www.dlink.com">www.dlink.com</a> .
Nederlands [Dutch]	Hierbij verklaart D-Link Corporation dat dit product, accessoires en software voldoen aan de richtlijnen 2014/53/EU. De volledige tekst van de EU conformiteitsverklaring en productfirmware is beschikbaar voor download van de productpagina op <a href="http://www.dlink.com">www.dlink.com</a> .
Malti [Maltese]	Bil-preżenti, D-Link Corporation tiddikjara li dan il-prodott, l-aċċessorji, u s-software huma konformi mad-Direttiva 2014/53/UE. Tista' tniżżel it-test sħiħ tad-dikjarazzjoni ta' konformità tal-UE u l-firmware tal-prodott mill-paġna tal-prodott fuq <a href="http://www.dlink.com">www.dlink.com</a> .
Magyar [Hungarian]	Ezennel a D-Link Corporation kijelenti, hogy a jelen termék, annak tartozékai és szoftvere megfelelnek a 2014/53/EU sz. rendeletnek. Az EU Megfelelőségi nyilatkozat teljes szövege és a termék firmware a termék oldaláról tölthető le a <a href="http://www.dlink.com">www.dlink.com</a> címen.
Polski [Polish]	D-Link Corporation niniejszym oświadcza, że ten produkt, akcesoria oraz oprogramowanie są zgodne z dyrektywami 2014/53/EU. Pełen tekst deklaracji zgodności UE oraz oprogramowanie sprzętowe do produktu można pobrać na stronie produktu w witrynie <a href="http://www.dlink.com">www.dlink.com</a> .
Português [Portuguese]	Desta forma, a D-Link Corporation declara que este produto, os acessórios e o software estão em conformidade com a diretiva 2014/53/UE. O texto completo da declaração de conformidade da UE e do firmware
Slovensko[Slovenian]	Podjetje D-Link Corporation s tem izjavlja, da so ta izdelek, dodatna oprema in programska oprema skladni z direktivami 2014/53/EU. Celotno besedilo izjave o skladnosti EU in vdelana programska oprema sta na voljo za prenos na strani izdelka na <a href="http://www.dlink.com">www.dlink.com</a> .
Slovensky [Slovak]	Spoločnosť D-Link týmto vyhlasuje, že tento produkt, príslušenstvo a softvér sú v súlade so smernicou 214/53/EÚ. Úplné znenie vyhlásenia EÚ o zhode a firmvéri produktu sú k dispozícii na prevzatie zo stránky produktu <a href="http://www.dlink.com">www.dlink.com</a> .
Suomi [Finnish]	D-Link Corporation täten vakuuttaa, että tämä tuote, lisävarusteet ja ohjelmisto ovat direktiivin 2014/53/EU vaatimusten mukaisia. Täydellinen EU-vaatimustenmukaisuusvakuutus samoin kuin tuotteen laiteohjelmisto ovat ladattavissa osoitteesta <a href="http://www.dlink.com">www.dlink.com</a> .
Svenska[Swedish]	D-Link Corporation försäkrar härmed att denna produkt, tillbehör och programvara överensstämmer med direktiv 2014/53/EU. Hela texten med EU-försäkran om överensstämmelse och produkt-firmware kan hämtas från <a href="http://www.dlink.com">produktsidan på www.dlink.com</a> .

Íslenska [Icelandic]	Hér með lýsir D-Link Corporation því yfir að þessi vara, fylgihlutir og hugbúnaður eru í samræmi við tilskipun 2014/53/EB. Sækja má ESB-samræmisýfirlýsinguna í heild sinni og fastbúnað vörunnar af vefsíðu vörunnar á <a href="http://www.dlink.com">www.dlink.com</a> .
Norsk [Norwegian]	Herved erklærer D-Link Corporation at dette produktet, tilbehøret og programvaren er i samsvar med direktivet 2014/53/EU. Den fullstendige teksten i EU-erklæring om samsvar og produktets fastvare er tilgjengelig for nedlasting fra produktsiden på <a href="http://www.dlink.com">www.dlink.com</a> .

**Warning Statement:**

The equipment supplied by an approved external power adapter which is considered to be Pluggable Equipment Type A. The socket outlets shall be installed near the equipment and be easily accessible.

### **NOTICE OF WIRELESS RADIO LAN USAGE IN THE EUROPEAN COMMUNITY (FOR WIRELESS PRODUCT ONLY):**

- This device is restricted to indoor use when operated in the European Community using channels in the 5.15-5.35 GHz band to reduce the potential for interference.
- This device is a 2.4 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries. This equipment may be operated in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, and CY.

#### **Usage Notes:**

- To remain in conformance with European National spectrum usage regulations, frequency and channel limitations will be applied on the products according to the country where the equipment will be deployed.
- This device is restricted from functioning in Ad-hoc mode while operating in 5 GHz. Ad-hoc mode is direct peer-to-peer communication between two client devices without an Access Point.
- Access points will support DFS (Dynamic Frequency Selection) and TPC (Transmit Power Control) functionality as required when operating in 5 GHz band within the EU.
- Please refer to the product manual or datasheet to check whether your product uses 2.4 GHz and/or 5 GHz wireless.

### **HINWEIS ZUR VERWENDUNG VON DRAHTLOS-NETZWERK (WLAN) IN DER EUROPÄISCHEN GEMEINSCHAFT ( NUR FÜR EIN DRAHTLOSES PRODUKT )**

- Der Betrieb dieses Geräts in der Europäischen Gemeinschaft bei Nutzung von Kanälen im 5,15-5,35 GHz Frequenzband ist ausschließlich auf Innenräume beschränkt, um das Interferenzpotential zu reduzieren.
- Bei diesem Gerät handelt es sich um ein zum Einsatz in allen EU-Mitgliedsstaaten und in EFTA-Ländern - ausgenommen Frankreich. Der Betrieb dieses Geräts ist in den folgenden Ländern erlaubt: AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

#### **Gebrauchshinweise:**

- Um den in Europa geltenden nationalen Vorschriften zum Nutzen des Funkspektrums weiterhin zu entsprechen, werden Frequenz und Kanalbeschränkungen, dem jeweiligen Land, in dem das Gerät zum Einsatz kommt, entsprechend, auf die Produkte angewandt.
- Die Funktionalität im Ad-hoc-Modus bei Betrieb auf 5 GHz ist für dieses Gerät eingeschränkt. Bei dem Ad-hoc-Modus handelt es sich um eine Peer-to-Peer-Kommunikation zwischen zwei Client-Geräten ohne einen Access Point.
- Access Points unterstützen die Funktionen DFS (Dynamic Frequency Selection) und TPC (Transmit Power Control) wie erforderlich bei Betrieb auf 5 GHz innerhalb der EU.
- Bitte schlagen Sie im Handbuch oder Datenblatt nach nach, ob Ihr Gerät eine 2,4 GHz und / oder 5 GHz Verbindung nutzt.

## **AVIS CONCERNANT L'UTILISATION DE LA RADIO SANS FIL LAN DANS LA COMMUNAUTÉ EUROPÉENNE (UNIQUEMENT POUR LES PRODUITS SANS FIL)**

- Cet appareil est limité à un usage intérieur lorsqu'il est utilisé dans la Communauté européenne sur les canaux de la bande de 5,15 à 5,35 GHz afin de réduire les risques d'interférences.
- Cet appareil est un système de transmission à large bande (émetteur-récepteur) de 2,4 GHz, destiné à être utilisé dans tous les États-membres de l'UE et les pays de l'AELE. Cet équipement peut être utilisé dans les pays suivants : AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

### **Notes d'utilisation:**

- Pour rester en conformité avec la réglementation nationale européenne en matière d'utilisation du spectre, des limites de fréquence et de canal seront appliquées aux produits selon le pays où l'équipement sera déployé.
- Cet appareil ne peut pas utiliser le mode Ad-hoc lorsqu'il fonctionne dans la bande de 5 GHz. Le mode Adhoc fournit une communication directe pair à pair entre deux périphériques clients sans point d'accès.
- Les points d'accès prendront en charge les fonctionnalités DFS (Dynamic Frequency Selection) et TPC (Transmit Power Control) au besoin lors du fonctionnement dans la bande de 5 GHz au sein de l'UE.
- Merci de vous référer au guide d'utilisation ou de la fiche technique afin de vérifier si votre produit utilise 2.4 GHz et/ou 5 GHz sans fil.

## **AVISO DE USO DE LA LAN DE RADIO INALÁMBRICA EN LA COMUNIDAD EUROPEA (SOLO PARA EL PRODUCTO INALÁMBRICO)**

- El uso de este dispositivo está restringido a interiores cuando funciona en la Comunidad Europea utilizando canales en la banda de 5,15-5,35 GHz, para reducir la posibilidad de interferencias.
- Este dispositivo es un sistema de transmisión (transceptor) de banda ancha de 2,4 GHz, pensado para su uso en todos los estados miembros de la UE y en los países de la AELC. Este equipo se puede utilizar en AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

### **Notas de uso:**

- Para seguir cumpliendo las normas europeas de uso del espectro nacional, se aplicarán limitaciones de frecuencia y canal en los productos en función del país en el que se pondrá en funcionamiento el equipo.
- Este dispositivo tiene restringido el funcionamiento en modo Ad-hoc mientras funcione a 5 Ghz. El modo Ad-hoc es la comunicación directa de igual a igual entre dos dispositivos cliente sin un punto de acceso.
- Los puntos de acceso admitirán la funcionalidad DFS (Selección de frecuencia dinámica) y TPC (Control de la potencia de transmisión) si es necesario cuando funcionan a 5 Ghz dentro de la UE.
- Por favor compruebe el manual o la ficha de producto para comprobar si el producto utiliza las bandas inalámbricas de 2.4 GHz y/o la de 5 GHz.

## **AVVISO PER L'USO DI LAN RADIO WIRELESS NELLA COMUNITÀ EUROPEA (SOLO PER PRODOTTI WIRELESS)**

- Nella Comunità europea, l'uso di questo dispositivo è limitato esclusivamente agli ambienti interni sui canali compresi nella banda da 5,15 a 5,35 GHz al fine di ridurre potenziali interferenze. Questo dispositivo è un sistema di trasmissione a banda larga a 2,4 GHz (ricetrasmittente), destinato all'uso in tutti gli stati membri dell'Unione europea e nei paesi EFTA.
- Questo dispositivo può essere utilizzato in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

### **Note per l'uso**

- Al fine di mantenere la conformità alle normative nazionali europee per l'uso dello spettro di frequenze, saranno applicate limitazioni sulle frequenze e sui canali per il prodotto in conformità alle normative del paese in cui il dispositivo viene utilizzato.
- Questo dispositivo non può essere attivato in modalità Ad-hoc durante il funzionamento a 5 GHz. La modalità Ad-hoc è una comunicazione diretta peer-to-peer fra due dispositivi client senza un punto di accesso.
- I punti di accesso supportano le funzionalità DFS (Dynamic Frequency Selection) e TPC (Transmit Power Control) richieste per operare a 5 GHz nell'Unione europea.
- Ti invitiamo a fare riferimento al manuale del prodotto o alla scheda tecnica per verificare se il tuo prodotto utilizza le frequenze 2,4 GHz e/o 5 GHz.

## **KENNISGEVING VAN DRAADLOOS RADIO LAN-GEbruik IN DE EUROPESE GEMEENSCHAP (ALLEEN VOOR DRAADLOOS PRODUCT)**

- Dit toestel is beperkt tot gebruik binnenshuis wanneer het wordt gebruikt in de Europese Gemeenschap gebruik makend van kanalen in de 5.15-5.35 GHz band om de kans op interferentie te beperken.
- Dit toestel is een 2.4 GHz breedband transmissiesysteem (transceiver) dat bedoeld is voor gebruik in alle EU lidstaten en EFTA landen. Deze uitrusting mag gebruikt worden in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

### **Gebruiksaanwijzingen:**

- Om de gebruiksvoorschriften van het Europese Nationale spectrum na te leven, zullen frequentie- en kanaalbeperkingen worden toegepast op de producten volgens het land waar de uitrusting gebruikt zal worden.
- Dit toestel kan niet functioneren in Ad-hoc mode wanneer het gebruikt wordt in 5 GHz. Ad-hoc mode is directe peer-to-peer communicatie tussen twee klantenapparaten zonder een toegangspunt.
- Toegangspunten ondersteunen DFS (Dynamic Frequency Selection) en TPC (Transmit Power Control) functionaliteit zoals vereist bij gebruik in 5 GHz binnen de EU.
- Raadpleeg de handleiding of de datasheet om te controleren of uw product gebruik maakt van 2.4 GHz en/of 5 GHz.

## **SAFETY INSTRUCTIONS**

The following general safety guidelines are provided to help ensure your own personal safety and protect your product from potential damage. Remember to consult the product user instructions for more details.

- Static electricity can be harmful to electronic components. Discharge static electricity from your body (i.e. touching grounded bare metal) before touching the product.
- Do not attempt to service the product and never disassemble the product. For some products with a user replaceable battery, please read and follow the instructions in the user manual.
- Do not spill food or liquid on your product and never push any objects into the openings of your product.
- Do not use this product near water, areas with high humidity, or condensation unless the product is specifically rated for outdoor application.
- Keep the product away from radiators and other heat sources.
- Always unplug the product from mains power before cleaning and use a dry lint free cloth only.

## **SICHERHEITSVORSCHRIFTEN**

Die folgenden allgemeinen Sicherheitsvorschriften dienen als Hilfe zur Gewährleistung Ihrer eigenen Sicherheit und zum Schutz Ihres Produkts. Weitere Details finden Sie in den Benutzeranleitungen zum Produkt.

- Statische Elektrizität kann elektronischen Komponenten schaden. Um Schäden durch statische Aufladung zu vermeiden, leiten Sie elektrostatische Ladungen von Ihrem Körper ab, (z. B. durch Berühren eines geerdeten blanken Metallteils), bevor Sie das Produkt berühren.
- Unterlassen Sie jeden Versuch, das Produkt zu warten, und versuchen Sie nicht, es in seine Bestandteile zu zerlegen. Für einige Produkte mit austauschbaren Akkus lesen Sie bitte das Benutzerhandbuch und befolgen Sie die dort beschriebenen Anleitungen.
- Vermeiden Sie, dass Speisen oder Flüssigkeiten auf Ihr Produkt gelangen, und stecken Sie keine Gegenstände in die Gehäuseschlitze oder -öffnungen Ihres Produkts.
- Verwenden Sie dieses Produkt nicht in unmittelbarer Nähe von Wasser und nicht in Bereichen mit hoher Luftfeuchtigkeit oder Kondensation, es sei denn, es ist speziell zur Nutzung in Außenbereichen vorgesehen und eingestuft.
- Halten Sie das Produkt von Heizkörpern und anderen Quellen fern, die Wärme erzeugen.
- Trennen Sie das Produkt immer von der Stromzufuhr, bevor Sie es reinigen und verwenden Sie dazu ausschließlich ein trockenes fusselfreies Tuch.

## **CONSIGNES DE SÉCURITÉ**

Les consignes générales de sécurité ci-après sont fournies afin d'assurer votre sécurité personnelle et de protéger le produit d'éventuels dommages. Veuillez consulter les consignes d'utilisation du produit pour plus de détails.

- L'électricité statique peut endommager les composants électroniques. Déchargez l'électricité statique de votre corps (en touchant un objet en métal relié à la terre par exemple) avant de toucher le produit.
- N'essayez pas d'intervenir sur le produit et ne le démontez jamais. Pour certains produits contenant une batterie remplaçable par l'utilisateur, veuillez lire et suivre les consignes contenues dans le manuel d'utilisation.
- Ne renversez pas d'aliments ou de liquide sur le produit et n'insérez jamais d'objets dans les orifices.
- N'utilisez pas ce produit à proximité d'un point d'eau, de zones très humides ou de condensation sauf si le produit a été spécifiquement conçu pour une application extérieure.
- Éloignez le produit des radiateurs et autres sources de chaleur.
- Débranchez toujours le produit de l'alimentation avant de le nettoyer et utilisez uniquement un chiffon sec non pelucheux.

## **INSTRUCCIONES DE SEGURIDAD**

Las siguientes directrices de seguridad general se facilitan para ayudarle a garantizar su propia seguridad personal y para proteger el producto frente a posibles daños. No olvide consultar las instrucciones del usuario del producto para obtener más información.

- La electricidad estática puede resultar nociva para los componentes electrónicos. Descargue la electricidad estática de su cuerpo (p. ej., tocando algún metal sin revestimiento conectado a tierra) antes de tocar el producto.
- No intente realizar el mantenimiento del producto ni lo desmonte nunca. Para algunos productos con batería reemplazable por el usuario, lea y siga las instrucciones del manual de usuario.
- No derrame comida o líquidos sobre el producto y nunca deje que caigan objetos en las aberturas del mismo.
- No utilice este producto cerca del agua, en zonas con humedad o condensación elevadas a menos que el producto esté clasificado específicamente para aplicación en exteriores.
- Mantenga el producto alejado de los radiadores y de otras fuentes de calor.
- Desenchufe siempre el producto de la alimentación de red antes de limpiarlo y utilice solo un paño seco sin pelusa.

## **ISTRUZIONI PER LA SICUREZZA**

Le seguenti linee guida sulla sicurezza sono fornite per contribuire a garantire la sicurezza personale degli utenti e a proteggere il prodotto da potenziali danni. Per maggiori dettagli, consultare le istruzioni per l'utente del prodotto.

- L'elettricità statica può essere pericolosa per i componenti elettronici. Scaricare l'elettricità statica dal corpo (ad esempio toccando una parte metallica collegata a terra) prima di toccare il prodotto.
- Non cercare di riparare il prodotto e non smontarlo mai. Per alcuni prodotti dotati di batteria sostituibile dall'utente, leggere e seguire le istruzioni riportate nel manuale dell'utente.
- Non versare cibi o liquidi sul prodotto e non spingere mai alcun oggetto nelle aperture del prodotto.
- Non usare questo prodotto vicino all'acqua, in aree con elevato grado di umidità o soggette a condensa a meno che il prodotto non sia specificatamente approvato per uso in ambienti esterni.
- Tenere il prodotto lontano da caloriferi e altre fonti di calore.
- Scollegare sempre il prodotto dalla presa elettrica prima di pulirlo e usare solo un panno asciutto che non lasci filacce.

## **VEILIGHEIDSINFORMATIE**

De volgende algemene veiligheidsinformatie werd verstrekt om uw eigen persoonlijke veiligheid te waarborgen en uw product te beschermen tegen mogelijke schade. Denk eraan om de gebruikersinstructies van het product te raadplegen voor meer informatie.

- Statische elektriciteit kan schadelijk zijn voor elektronische componenten. Ontlaad de statische elektriciteit van uw lichaam (d.w.z. het aanraken van geaard bloot metaal) voordat u het product aanraakt.
- U mag nooit proberen het product te onderhouden en u mag het product nooit demonteren. Voor sommige producten met door de gebruiker te vervangen batterij, dient u de instructies in de gebruikershandleiding te lezen en te volgen.
- Mors geen voedsel of vloeistof op uw product en u mag nooit voorwerpen in de openingen van uw product duwen.
- Gebruik dit product niet in de buurt van water, gebieden met hoge vochtigheid of condensatie, tenzij het product specifiek geclassificeerd is voor gebruik buitenshuis.
- Houd het product uit de buurt van radiators en andere warmtebronnen.
- U dient het product steeds los te koppelen van de stroom voordat u het reinigt en gebruik uitsluitend een droge pluisvrije doek.

## Disposing and Recycling Your Product

### ENGLISH

EN



This symbol on the product or packaging means that according to local laws and regulations this product should be not be disposed of in household waste but sent for recycling. Please take it to a collection point designated by your local authorities once it has reached the end of its life, some will accept products for free. By recycling the product and its packaging in this manner you help to conserve the environment and protect human health.

### D-Link and the Environment

At D-Link, we understand and are committed to reducing any impact our operations and products may have on the environment. To minimise this impact D-Link designs and builds its products to be as environmentally friendly as possible, by using recyclable, low toxic materials in both products and packaging.

D-Link recommends that you always switch off or unplug your D-Link products when they are not in use. By doing so you will help to save energy and reduce CO2 emissions.

To learn more about our environmentally responsible products and packaging please visit [www.dlinkgreen.com](http://www.dlinkgreen.com).

### DEUTSCH

DE



Dieses Symbol auf dem Produkt oder der Verpackung weist darauf hin, dass dieses Produkt gemäß bestehender örtlicher Gesetze und Vorschriften nicht über den normalen Hausmüll entsorgt werden sollte, sondern einer Wiederverwertung zuzuführen ist. Bringen Sie es bitte zu einer von Ihrer Kommunalbehörde entsprechend amtlich ausgewiesenen Sammelstelle, sobald das Produkt das Ende seiner Nutzungsdauer erreicht hat. Für die Annahme solcher Produkte erheben einige dieser Stellen keine Gebühren. Durch ein auf diese Weise durchgeführtes Recycling des Produkts und seiner Verpackung helfen Sie, die Umwelt zu schonen und die menschliche Gesundheit zu schützen.

### D-Link und die Umwelt

D-Link ist sich den möglichen Auswirkungen seiner Geschäftstätigkeiten und seiner Produkte auf die Umwelt bewusst und fühlt sich verpflichtet, diese entsprechend zu mindern. Zu diesem Zweck entwickelt und stellt D-Link seine Produkte mit dem Ziel größtmöglicher Umweltfreundlichkeit her und verwendet wiederverwertbare, schadstoffarme Materialien bei Produktherstellung und Verpackung.

D-Link empfiehlt, Ihre Produkte von D-Link, wenn nicht in Gebrauch, immer auszuschalten oder vom Netz zu nehmen. Auf diese Weise helfen Sie, Energie zu sparen und CO2-Emissionen zu reduzieren.

Wenn Sie mehr über unsere umweltgerechten Produkte und Verpackungen wissen möchten, finden Sie entsprechende Informationen im Internet unter [www.dlinkgreen.com](http://www.dlinkgreen.com).

**FRANÇAIS****FR**

Ce symbole apposé sur le produit ou son emballage signifie que, conformément aux lois et réglementations locales, ce produit ne doit pas être éliminé avec les déchets domestiques mais recyclé. Veuillez le rapporter à un point de collecte prévu à cet effet par les autorités locales; certains accepteront vos produits gratuitement. En recyclant le produit et son emballage de cette manière, vous aidez à préserver l'environnement et à protéger la santé de l'homme.

**D-Link et l'environnement**

Chez D-Link, nous sommes conscients de l'impact de nos opérations et produits sur l'environnement et nous engageons à le réduire. Pour limiter cet impact, D-Link conçoit et fabrique ses produits de manière aussi écologique que possible, en utilisant des matériaux recyclables et faiblement toxiques, tant dans ses produits que ses emballages.

D-Link recommande de toujours éteindre ou débrancher vos produits D-Link lorsque vous ne les utilisez pas. Vous réaliserez ainsi des économies d'énergie et réduirez vos émissions de CO2.

Pour en savoir plus sur les produits et emballages respectueux de l'environnement, veuillez consulter le [www.dlinkgreen.com](http://www.dlinkgreen.com).

**ESPAÑOL****ES**

Este símbolo en el producto o el embalaje significa que, de acuerdo con la legislación y la normativa local, este producto no se debe desechar en la basura doméstica sino que se debe reciclar. Llévelo a un punto de recogida designado por las autoridades locales una vez que ha llegado al fin de su vida útil; algunos de ellos aceptan recogerlos de forma gratuita. Al reciclar el producto y su embalaje de esta forma, contribuye a preservar el medio ambiente y a proteger la salud de los seres humanos.

**D-Link y el medio ambiente**

En D-Link, comprendemos y estamos comprometidos con la reducción del impacto que puedan tener nuestras actividades y nuestros productos en el medio ambiente. Para reducir este impacto, D-Link diseña y fabrica sus productos para que sean lo más ecológicos posible, utilizando materiales reciclables y de baja toxicidad tanto en los productos como en el embalaje.

D-Link recomienda apagar o desenchufar los productos D-Link cuando no se estén utilizando. Al hacerlo, contribuirá a ahorrar energía y a reducir las emisiones de CO2.

Para obtener más información acerca de nuestros productos y embalajes ecológicos, visite el sitio [www.dlinkgreen.com](http://www.dlinkgreen.com).

**ITALIANO****IT**

La presenza di questo simbolo sul prodotto o sulla confezione del prodotto indica che, in conformità alle leggi e alle normative locali, questo prodotto non deve essere smaltito nei rifiuti domestici, ma avviato al riciclo. Una volta terminato il ciclo di vita utile, portare il prodotto presso un punto di raccolta indicato dalle autorità locali. Alcuni questi punti di raccolta accettano gratuitamente i prodotti da riciclare. Scegliendo di riciclare il prodotto e il relativo imballaggio, si contribuirà a preservare l'ambiente e a salvaguardare la salute umana.

**D-Link e l'ambiente**

D-Link cerca da sempre di ridurre l'impatto ambientale dei propri stabilimenti e dei propri prodotti. Allo scopo di ridurre al minimo tale impatto, D-Link progetta e realizza i propri prodotti in modo che rispettino il più possibile l'ambiente, utilizzando materiali riciclabili a basso tasso di tossicità sia per i prodotti che per gli imballaggi.

D-Link raccomanda di spegnere sempre i prodotti D-Link o di scollegarne la spina quando non vengono utilizzati. In questo modo si contribuirà a risparmiare energia e a ridurre le emissioni di anidride carbonica.

Per ulteriori informazioni sui prodotti e sugli imballaggi D-Link a ridotto impatto ambientale, visitate il sito all'indirizzo [www.dlinkgreen.com](http://www.dlinkgreen.com).

**NEDERLANDS****NL**

Dit symbool op het product of de verpakking betekent dat dit product volgens de plaatselijke wetgeving niet mag worden weggegooid met het huishoudelijk afval, maar voor recyclage moeten worden ingeleverd. Zodra het product het einde van de levensduur heeft bereikt, dient u het naar een inzamelpunt te brengen dat hiertoe werd aangeduid door uw plaatselijke autoriteiten, sommige autoriteiten accepteren producten zonder dat u hiervoor dient te betalen. Door het product en de verpakking op deze manier te recyclen helpt u het milieu en de gezondheid van de mens te beschermen.

**D-Link en het milieu**

Bij D-Link spannen we ons in om de impact van onze handelingen en producten op het milieu te beperken. Om deze impact te beperken, ontwerpt en bouwt D-Link zijn producten zo milieuvriendelijk mogelijk, door het gebruik van recycleerbare producten met lage toxiciteit in product en verpakking.

D-Link raadt aan om steeds uw D-Link producten uit te schakelen of uit de stekker te halen wanneer u ze niet gebruikt. Door dit te doen bespaart u energie en beperkt u de CO<sub>2</sub>-emissies.

Breng een bezoek aan [www.dlinkgreen.com](http://www.dlinkgreen.com) voor meer informatie over onze milieuverantwoorde producten en verpakkingen.

**POLSKI****PL**

Ten symbol umieszczony na produkcie lub opakowaniu oznacza, że zgodnie z miejscowym prawem i lokalnymi przepisami niniejszego produktu nie wolno wyrzucać jak odpady czy śmieci z gospodarstwa domowego, lecz należy go poddać procesowi recyklingu. Po zakończeniu użytkowania produktu, niektóre odpowiednie do tego celu podmioty przyjmą takie produkty nieodpłatnie, dlatego prosimy dostarczyć go do punktu zbiórki wskazanego przez lokalne władze. Poprzez proces recyklingu i dzięki takiemu postępowaniu z produktem oraz jego opakowaniem, pomogą Państwo chronić środowisko naturalne i dbać o ludzkie zdrowie.

**D-Link i środowisko**

D-Link podchodzimy w sposób świadomy do ochrony otoczenia oraz jesteśmy zaangażowani w zmniejszanie wpływu naszych działań i produktów na środowisko naturalne. W celu zminimalizowania takiego wpływu firma D-Link konstruuje i wytwarza swoje produkty w taki sposób, aby były one jak najbardziej przyjazne środowisku, stosując do tych celów materiały nadające się do powtórnego wykorzystania, charakteryzujące się małą toksycznością zarówno w przypadku samych produktów jak i opakowań.

Firma D-Link zaleca, aby Państwo zawsze prawidłowo wyłączali z użytku swoje produkty D-Link, gdy nie są one wykorzystywane. Postępując w ten sposób pozwalają Państwo oszczędzać energię i zmniejszać emisje CO<sub>2</sub>.

Aby dowiedzieć się więcej na temat produktów i opakowań mających wpływ na środowisko prosimy zapoznać się ze stroną Internetową [www.dlinkgreen.com](http://www.dlinkgreen.com).

**ČESKY****CZ**

Tento symbol na výrobku nebo jeho obalu znamená, že podle místně platných předpisů se výrobek nesmí vyhazovat do komunálního odpadu, ale odeslat k recyklaci. Až výrobek doslouží, odnešte jej prosím na sběrné místo určené místními úřady k tomuto účelu. Některá sběrná místa přijímají výrobky zdarma. Recyklací výrobku i obalu pomáháte chránit životní prostředí i lidské zdraví.

**D-Link a životní prostředí**

Ve společnosti D-Link jsme si vědomi vlivu našich provozů a výrobků na životní prostředí a snažíme se o minimalizaci těchto vlivů. Proto své výrobky navrhujeme a vyrábíme tak, aby byly co nejekologičtější, a ve výrobcích i obalech používáme recyklovatelné a nízkotoxické materiály.

Společnost D-Link doporučuje, abyste své výrobky značky D-Link vypnuli nebo vytáhli ze zásuvky vždy, když je nepoužíváte. Pomůžete tak šetřit energii a snížit emise CO<sub>2</sub>.

Více informací o našich ekologických výrobcích a obalech najdete na adrese [www.dlinkgreen.com](http://www.dlinkgreen.com).

**MAGYAR****HU**

Ez a szimbólum a terméken vagy a csomagoláson azt jelenti, hogy a helyi törvényeknek és szabályoknak megfelelően ez a termék nem semmisíthető meg a háztartási hulladékkal együtt, hanem újrahasznosításra kell küldeni. Kérjük, hogy a termék élettartamának elteltét követően vigye azt a helyi hatóság által kijelölt gyűjtőhelyre. A termékek egyes helyeken ingyen elhelyezhetők. A termék és a csomagolás újrahasznosításával segíti védeni a környezetet és az emberek egészségét.

**A D-Link és a környezet**

A D-Linknél megértjük és elkötelezettek vagyunk a műveleteink és termékeink környezetre gyakorolt hatásainak csökkentésére. Az ezen hatás csökkentése érdekében a D-Link a lehető leginkább környezetbarát termékeket tervez és gyárt azáltal, hogy újrahasznosítható, alacsony károsanyag-tartalmú termékeket gyárt és csomagolásokat alkalmaz.

A D-Link azt javasolja, hogy mindig kapcsolja ki vagy húzza ki a D-Link termékeket a tápforrásból, ha nem használja azokat. Ezzel segít az energia megtakarításában és a széndioxid kibocsátásának csökkentésében.

Környezetbarát termékeinkről és csomagolásainkról további információkat a [www.dlinkgreen.com](http://www.dlinkgreen.com) weboldalon tudhat meg.

**NORSK****NO**

Dette symbolet på produktet eller forpakningen betyr at dette produktet ifølge lokale lover og forskrifter ikke skal kastes sammen med husholdningsavfall, men leveres inn til gjenvinning. Vennligst ta det til et innsamlingssted anvist av lokale myndigheter når det er kommet til slutten av levetiden. Noen steder aksepteres produkter uten avgift. Ved på denne måten å gjenvinne produktet og forpakningen hjelper du å verne miljøet og beskytte folks helse.

**D-Link og miljøet**

Hos D-Link forstår vi oss på og er forpliktet til å minske innvirkningen som vår drift og våre produkter kan ha på miljøet. For å minimalisere denne innvirkningen designer og lager D-Link produkter som er så miljøvennlig som mulig, ved å bruke resirkulerbare, lav-toksiske materialer både i produktene og forpakningen.

D-Link anbefaler at du alltid slår av eller frakobler D-Link-produkter når de ikke er i bruk. Ved å gjøre dette hjelper du å spare energi og å redusere CO2-utslipp.

For mer informasjon angående våre miljøansvarlige produkter og forpakninger kan du gå til [www.dlinkgreen.com](http://www.dlinkgreen.com).

**DANSK****DK**

Dette symbol på produktet eller emballagen betyder, at dette produkt i henhold til lokale love og regler ikke må bortskaffes som husholdningsaffald, mens skal sendes til genbrug. Indlever produktet til et indsamlingssted som angivet af de lokale myndigheder, når det er nået til slutningen af dets levetid. I nogle tilfælde vil produktet blive modtaget gratis. Ved at indlevere produktet og dets emballage til genbrug på denne måde bidrager du til at beskytte miljøet og den menneskelige sundhed.

**D-Link og miljøet**

Hos D-Link forstår vi og bestræber os på at reducere enhver indvirkning, som vores aktiviteter og produkter kan have på miljøet. For at minimere denne indvirkning designer og producerer D-Link sine produkter, så de er så miljøvenlige som muligt, ved at bruge genanvendelige materialer med lavt giftighedsniveau i både produkter og emballage.

D-Link anbefaler, at du altid slukker eller frakobler dine D-Link-produkter, når de ikke er i brug. Ved at gøre det bidrager du til at spare energi og reducere CO<sub>2</sub>-udledningerne.

Du kan finde flere oplysninger om vores miljømæssigt ansvarlige produkter og emballage på [www.dlinkgreen.com](http://www.dlinkgreen.com).

**SUOMI****FI**

Tämä symboli tuotteen pakkauksessa tarkoittaa, että paikallisten lakien ja säännösten mukaisesti tätä tuotetta ei pidä hävittää yleisen kotitalousjätteen seassa vaan se tulee toimittaa kierrätettäväksi. Kun tuote on elinkaarensa päässä, toimita se lähimpään viranomaisten hyväksymään kierrätyspisteeseen. Kierrättämällä käytetyn tuotteen ja sen pakkauksen autat tukemaan sekä ympäristön että ihmisten terveyttä ja hyvinvointia.

**D-Link ja ympäristö**

D-Link ymmärtää ympäristönsuojelun tärkeyden ja on sitoutunut vähentämään tuotteistaan ja niiden valmistuksesta ympäristölle mahdollisesti aiheutuvia haittavaikutuksia. Nämä negatiiviset vaikutukset minimoidakseen D-Link suunnittelee ja valmistaa tuotteensa mahdollisimman ympäristöystävällisiksi käyttämällä kierrätettäviä, alhaisia pitoisuuksia haitallisia aineita sisältäviä materiaaleja sekä tuotteissaan että niiden pakkauksissa.

Suosittellemme, että irrotat D-Link-tuotteesi virtalähteestä tai sammutat ne aina, kun ne eivät ole käytössä. Toimimalla näin autat säästämään energiaa ja vähentämään hiilidioksiidipäästöjä.

Lue lisää ympäristöystävällisistä D-Link-tuotteista ja pakkauksistamme osoitteesta [www.dlinkgreen.com](http://www.dlinkgreen.com).

**SVENSKA****SE**

Den här symbolen på produkten eller förpackningen betyder att produkten enligt lokala lagar och föreskrifter inte skall kastas i hushållssoporna utan i stället återvinnas. Ta den vid slutet av dess livslängd till en av din lokala myndighet utsedd uppsamlingsplats, vissa accepterar produkter utan kostnad. Genom att på detta sätt återvinna produkten och förpackningen hjälper du till att bevara miljön och skydda människors hälsa.

**D-Link och miljön**

På D-Link förstår vi och är fast beslutna att minska den påverkan våra verksamheter och produkter kan ha på miljön. För att minska denna påverkan utformar och bygger D-Link sina produkter för att de ska vara så miljövänliga som möjligt, genom att använda återvinningsbara material med låg gifthalt i både produkter och förpackningar.

D-Link rekommenderar att du alltid stänger av eller kopplar ur dina D-Link produkter när du inte använder dem. Genom att göra detta hjälper du till att spara energi och minska utsläpp av koldioxid.

För mer information om våra miljöansvariga produkter och förpackningar [www.dlinkgreen.com](http://www.dlinkgreen.com).

**PORTUGUÊS****PT**

Este símbolo no produto ou embalagem significa que, de acordo com as leis e regulamentações locais, este produto não deverá ser eliminado juntamente com o lixo doméstico mas enviado para a reciclagem. Transporte-o para um ponto de recolha designado pelas suas autoridades locais quando este tiver atingido o fim da sua vida útil, alguns destes pontos aceitam produtos gratuitamente. Ao reciclar o produto e respectiva embalagem desta forma, ajuda a preservar o ambiente e protege a saúde humana.

**A D-Link e o ambiente**

Na D-Link compreendemos e comprometemo-nos com a redução do impacto que as nossas operações e produtos possam ter no ambiente. Para minimizar este impacto a D-Link concebe e constrói os seus produtos para que estes sejam o mais inofensivos para o ambiente possível, utilizando materiais recicláveis e não tóxicos tanto nos produtos como nas embalagens.

A D-Link recomenda que desligue os seus produtos D-Link quando estes não se encontrarem em utilização. Com esta acção ajudará a poupar energia e reduzir as emissões de CO<sub>2</sub>.

Para saber mais sobre os nossos produtos e embalagens responsáveis a nível ambiental visite [www.dlinkgreen.com](http://www.dlinkgreen.com).